

Trick of Flow[®]


Specialties



Ultimate Bolt-on
Performance![™]

You don't cut corners or accept compromises. And neither should your parts. Trick Flow Specialties built its reputation by creating a broad range of industry-leading performance products.

Trick Flow engineers don't just take a factory cylinder head design, make minor changes, cast it in aluminum, and hope for more power. Working from our corporate headquarters in Tallmadge, Ohio, Trick Flow engineers aggressively change valve angles, relocate combustion chambers, try new spark plug locations, and design new port arrangements in the search for more usable horsepower and torque. In fact, Trick Flow will never release a product if it fails to deliver significant power improvements over stock.

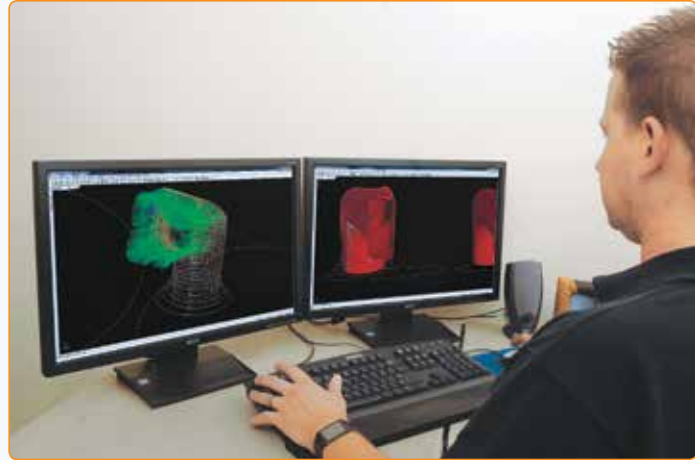

Trick Flow's in-house pattern makers build the foundry tooling to turn the designs into high performance parts. Trick Flow works diligently to ensure castings meet stringent quality standards before they are machined on-site in our machine shop using the latest in advanced multi-axis CNC-machining centers. The heads are assembled internally with top-quality components by experienced personnel.

Specialists using Trick Flow's two internal SuperFlow engine dynamometers perform extensive performance and durability analysis before approving the heads for road and track testing. After all of the testing is complete, and Trick Flow is confident that the heads will exceed the customer's expectations for quality, durability, and performance, the heads are boxed on-site and shipped to authorized dealers.

Your 2015 Trick Flow Specialties product catalog is full of hundreds of parts that are engineered, cast, machined, assembled, durability tested, and dyno proven in the USA with one goal in mind—providing you with Ultimate Bolt-On Performance!™

About Emissions-Legal Parts

Some Trick Flow parts are emissions-legal for use in all 50 states and are designated as such with a "50-State-Legal" symbol. These parts have either been granted a California Air Resources Board (CARB) E.O. number or are considered a direct replacement part.

Parts that do not have this symbol are not emissions-certified, are for racing or off-road use only, and cannot be used on vehicles that operate on public highways.



WARNING

Proposition 65 Compliance Statement: It is the responsibility of Trick Flow to warn its customers and employees that some products sold in this catalog contain chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Trick Flow's Four Performance Levels

Trick Flow cylinder heads are available in four performance levels, each specifically tailored to address specific horsepower levels and budget requirements requested by our customers.

Fast As Cast® Runners with Standard Combustion Chambers:

An excellent foundation for grassroots racing and moderate performance rebuilds, Fast As Cast cylinder heads outflow any cast head available, and even rival some of our competitor's CNC-ported heads, for about the same price as most regular cast heads.

Fast As Cast Runners with CNC-Profiled Combustion Chambers:

Same as our other Fast As Cast heads, but with standard resolution CNC-profiled combustion chambers with port-to-valve seat blending (bowl blending) for increased performance.

CNC Street Ported Runners and Combustion Chambers:

A great entry-level CNC cylinder head with fully CNC-machined runners and combustion chambers with a standard resolution surface finish for significant performance gains.



Fast As Cast®



CNC Street Ported



CNC Competition Ported

CNC Competition Ported Runners and Combustion Chambers:

Trick Flow's top-of-the-line choice with fully CNC-machined runners and combustion chambers and a premium high resolution surface finish that delivers maximum airflow and performance over the entire powerband.

PowerPort® Cylinder Heads for Big Block Moparpage 4

- PowerPort 240 Cylinder Heads

GenX® Cylinder Heads and Accessories for GM LSpages 5–11

- GenX 260 Square Port Cylinder Heads for GM LS7
- Cylinder Head Bolt Kits
- GenX 255 Square Port Cylinder Heads for GM LS3
- Valve Cover Spacers
- GenX 205 Cathedral Port Cylinder Heads for GM LS 4.8L/5.3L/5.7L (Vortec)
- GenX 215 Cathedral Port Cylinder Heads for GM LS1
- GenX 225 Cathedral Port Cylinder Heads for GM LS2
- GenX 235 Cathedral Port Cylinder Heads for GM LSX
- GenX 245 Cathedral Port Cylinder Heads for GM LSX
- GenX 220 Cathedral Port Cylinder Heads for GM LS1 and LS2
- Timing Chain Damper and Adapter Bracket
- GenX Top-End Engine Kits
- Track Max® Camshafts
- Valve Spring Upgrade Kits
- True Roller Timing Chain Sets
- Rocker Arm Upgrade Components
- TFX™ EFI Fuel Rails
- TFX™ EFI Throttle Bodies
- R-Series Intake Manifolds for GM LS3
- TFX™ Fuel Injector Connectors and Adapters
- Steam Line Fittings and Plumbing Kits

GenX® Cylinder Heads and Accessories for GM LT1 pages 12–13

- GenX 185 Cylinder Heads
- GenX 195 Cylinder Heads
- Track Max® Camshaft
- GenX Top-End Engine Kit
- TFX™ Cold Air Intake Kits
- Air Inlet Elbows

Super 23® and Ultra 18® Cylinder Heads and Accessories for Small Block Chevrolet.....pages 14–21

- Super 23 175 Cylinder Heads
- Super 23 195 Cylinder Heads
- Super 23 215 Cylinder Heads
- Super 23 230 Cylinder Heads
- Super 23 Top-End Engine Kits
- Ultra 18 250 Cylinder Head
- Chrome Steel and Fabricated Aluminum Valve Covers
- Roller Rocker Arms
- Valve Cover Adapters
- Track Max® Camshafts
- Rocker Stud Girdles
- True Roller Timing Chain Set
- Cylinder Head Bolt Kit
- StreetBurner® Intake Manifold
- Cast Aluminum Valve Covers
- Gaskets and Gasket Sets

PowerOval® and PowerPort® Cylinder Heads and Accessories for Big Block Chevroletpages 22–25

- PowerOval 280 Cylinder Heads
- PowerPort 320 Cylinder Heads
- PowerPort 365 Cylinder Head
- Roller Rocker Arms
- Rocker Stud Girdles
- R-Series Intake Manifolds
- True Roller Timing Chain Set
- Valve Covers
- Phenolic Carburetor Spacers
- Track Max® Camshaft
- PowerOval Top-End Engine Kit
- Cylinder Head Bolt Kits
- Fender Cover
- Gasket Sets

Twisted Wedge® Cylinder Heads and Accessories for Ford 4.6L/5.4Lpages 26–32

- Twisted Wedge Track Heat® 185 Cylinder Heads
- Twisted Wedge Race 195 Cylinder Heads
- Power Steering Reservoir Bracket
- Timing Cover Bolt and Stud Kit
- Track Max® Camshafts
- Track Max® Camshaft and Valve Spring Upgrade Kits
- Cylinder Head and Camshaft Installation DVD
- Valve Cover-Mount Ignition Systems
- Valve Cover Kits
- Folding Chair
- Replacement Valvetrain Components
- Twisted Wedge® Top-End Engine Kits
- Cylinder Head Bolt Kit
- Track Max® Valve Spring Upgrade Kits
- Cylinder Head and Intake Gaskets
- Valve Spring Compressor
- Cam Degree Supplement Kit and Accessories
- Valve Spring Change Accessory Kit
- EFI Programmer
- EFI Intake Manifolds
- TFX™ EFI Fuel Rails
- High-Flow Upper Plenums
- TFX™ Upper Plenum and Throttle Body Combos
- TFX™ Intake Combos

PowerPort® Cylinder Heads and Accessories for Ford 351C, 351M/400, and Clevorpages 33–35

- PowerPort Cleveland 195 Cylinder Heads
- PowerPort Cleveland 225 Cylinder Heads
- Intake Manifolds
- Valve Covers
- Roller Rocker Arms
- Rocker Stud Girdles
- PowerPort Forged Pistons
- Throttle Cable Brackets
- TFX™ EFI Fuel Rails
- Coolant Crossover Kit

Twisted Wedge® and High Port® Cylinder Heads and Accessories for Small Block Fordpages 36–46

- Twisted Wedge 170 Cylinder Heads
- Twisted Wedge 11R Cylinder Heads
- Twisted Wedge Race 206 Cylinder Heads
- Twisted Wedge Race 225 Cylinder Heads
- High Port 192 Cylinder Heads
- High Port 225 Cylinder Heads
- High Port 240 Cylinder Heads
- Head Bolt Reducer Bushings
- Locating Dowels
- Twisted Wedge Top-End Engine Kits
- TFX™ Nitrous Systems for EFI Manifolds
- Header Flanges
- EFI Intake Manifolds
- TFX™ EFI Fuel Rails and Kits
- Track Max® Camshafts
- True Roller Timing Chain Set
- Gaskets and Gasket Sets
- Roller Rocker Arms
- Track Max® Valve Spring Upgrade Kits
- Main Stud Girdles
- Rocker Stud Girdles
- Carburetor and Carb-Style EFI Intake Manifolds
- Cylinder Head Bolt Kit
- Valve Covers
- Twisted Wedge Forged Pistons
- Billet Oil Fill Kit
- A/C Eliminator Bracket
- Underdrive Pulley Kits
- SN95 Throttle Body Adapters
- Throttle Cable Bracket Kits
- EFI Heat Spacers

PowerPort® Cylinder Heads and Accessories for Ford 429/460pages 47–50

- PowerPort 290 Cylinder Heads
- PowerPort 325 Cylinder Heads
- PowerPort A460 340 Cylinder Heads
- PowerPort A460 360 Cylinder Heads
- Intake Manifolds
- True Roller Timing Chain Set
- Roller Rocker Arms
- Rocker Stud Girdles
- Main Stud Girdles
- Valve Covers

Valvetrain Components pages 51–59

- Hydraulic Lifters
- Cam Degree and Supplement Kits
- Chromoly Pushrods
- Pushrod Length Checkers
- Track Max® Camshafts
- Camshaft Installation Handle
- Valve Spring Compressors
- Trick Flow by PAC Racing Valve Springs
- Trick Flow by PAC Racing Valve Spring Upgrade Kits
- Valve Spring Retainers
- Valve Spring Cups
- Valve Stem Seals
- Valve Spring Shims
- Valve Spring I.D. Locators
- Valve Stem Locks
- True Roller Timing Chain Sets
- Track Max® Harmonic Dampers and Pulley Kits

Air and Fuel Deliverypages 60–64

- Carburetors
- Fuel Pressure Regulators
- Throttle Cable Mounting Brackets
- Throttle Cable Linkage Adapters
- Fuel Pressure Regulator Brackets
- Carburetor Spacers
- TFX™ Fuel Rail and Pressure Sensor Adapters
- TFX™ Fuel Pumps
- TFX™ Fuel Filters
- Fuel Injectors
- TFX™ EFI Throttle Bodies
- TFX™ Fuel Line Fittings
- Trick Flow by Magnuson Superchargers
- TBI Spacer Kits
- TFX™ Cold Air and High-Flow Air Intake Kits
- TFX™ Nitrous Systems

Headers and Exhaustpages 65–68

- Headers
- MLS Exhaust Gaskets
- Header Spark Plug Socket
- Ball Caps

Accessories and Toolspages 69–71

- MLS Head Gaskets
- Differential Covers and Carrier Bearing Cap Stud Kits
- Transmission Pans
- Valve Cover Breather Systems and Accessories
- Coolant Overflow/Recovery Tank
- Chrome Engine Accessories
- Steam Line Fittings and Plumbing Kits
- T-Shirts
- Cylinder Head Porting Tools
- Cylinder Head Work Stands
- Engine Oil Supplement

Ultimate Bolt-On Performance® Lifetime Warranty

Trick Flow Specialties cylinder head castings are backed by a lifetime warranty. If a cylinder head casting fails to provide the original purchaser with complete satisfaction, Trick Flow Specialties will repair or replace it free of charge—guaranteed!

Moreover, the valves, valve guides, valve seats, valve job, valve springs, valve spring retainers, valve locks, rocker arm studs, guideplates, and valve stem seals included on assembled Trick Flow Specialties cylinder heads are warranted to the original purchaser to be free from defects in materials and workmanship for a period of two years from the date of purchase. All other Trick Flow Specialties products are warranted to be free from defects in materials and workmanship for a period of 90 days. There are no mileage limitations!

Trick Flow Specialties has an ongoing product improvement program and reserves the right to change specifications without notice. Catalog errors in description or photography are subject to correction.

Extent of Warranty


Customers who believe they have a defective product should return it to the dealer from which it was purchased or ship it freight prepaid to Trick Flow Specialties along with proof of purchase and a complete description of the problem. If a thorough inspection indicates defects in materials or workmanship, our sole obligation will be to repair or replace the product.

This warranty is only effective if the product was properly installed, subjected to normal use and service, did not fail due to owner negligence or misuse, and has not been altered or modified.

Trick Flow Specialties warranties do not cover any installation or removal costs.

Trick Flow Specialties is not liable for consequential damages for breach of contract of any warranty in excess of the purchase price of the product sold.

Legendary Trick Flow Performance for Mopar Owners!

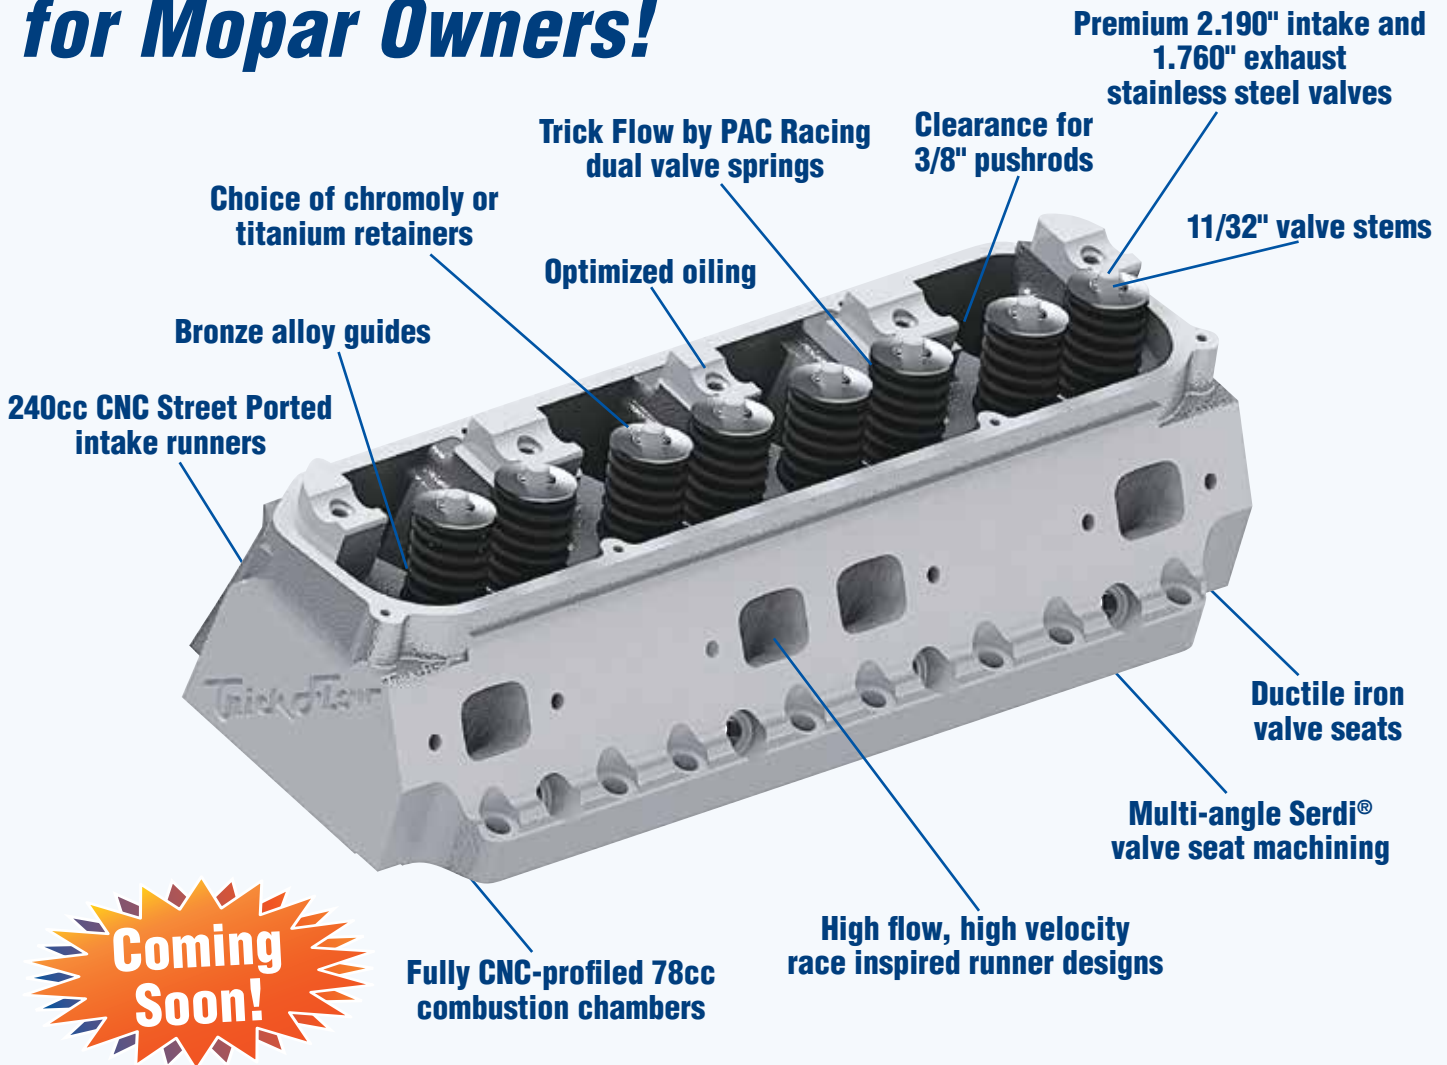

**Coming
Soon!**

Dodge and Plymouth owners have been waiting patiently for Ultimate Bolt-On Performance™, and now it's their turn! That's right Mopar fans, now you can experience the difference Trick Flow's advanced engineering and manufacturing makes with lower ETs, faster trap speeds, and bigger dyno numbers!

The all-new PowerPort 240 cylinder heads for big block Mopar are engineered to deliver big flow in a cost-effective package. The castings are made from premium grade A356-T61 aluminum because of its high strength and light weight; critical areas are reinforced to support high compression and RPMs. The oil holes for the rocker shafts are relocated to improve airflow and allow for a more optimized runner design, and the rocker shaft bosses are reinforced and strengthened to better handle the stresses associated with high performance use.

Fully CNC-profiled combustion chambers and CNC Street Ported runners provide significant power gains. Premium certified components are used for uncompromising quality and durability. All factory-style big block Mopar pistons, roller rocker arms, intake manifolds, and headers can be used to make upgrading fast and easy. All machining operations will be performed using the finest CNC tooling to ensure proper dimensional accuracy and balanced flow from runner-to-runner.

While more details of these exciting new cylinder heads are still forthcoming at press time, Trick Flow will have these new PowerPort 240 heads available in 2015. So be ready to get yours, because when the new PowerPort 240 heads hit the street and track, the competition will be scrambling to catch up!

Visit TrickFlow.com for updates and availability announcements.

NOTE: Specifications subject to change.

GenX® 260 Square Port Cylinder Heads for GM LS7



TFS-3271T004-C01

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	70cc CNC-profiled
Intake Port Volume:	260cc CNC Competition Ported
Intake Port Location:	Stock LS7
Intake Port Dimensions:	2.400" x 1.370" LS7 square port
Intake Gaskets:	GM 89017852
Intake Valve Diameter:	2.200" (TFS-32700211)
Intake Valve Seat:	Ductile iron (TFS-53400271)
Exhaust Port Volume:	87cc CNC Competition Ported
Exhaust Port Location:	Stock LS7
Exhaust Port Dimensions:	1.460" x 1.700" oval
Exhaust Gaskets:	GM 12582179
Exhaust Valve Diameter:	1.600" (TFS-32600212)
Exhaust Valve Seat:	Ductile iron (TFS-30600272-1)
Valve Angles:	12°
Valve Guide Material:	Trick-Alloy powdered metal (TFS-30700252)
Valve Seals:	Viton® fluoroelastomer canister (TFS-30600455)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.480"
Valve Spring I.D. Locators:	1.300"
Valve Spring Retainers:	Steel (TFS-21400410); titanium (TFS-214T0415)
Valve Stem Locks:	7° steel (TFS-30600444)
Valve Springs, Standard:	1.300" o.d. dual spring (TFS-16904-16) 150 lbs. @ 1.800" installed height 400 lbs. @ 1.200" open 370 lbs. per inch rate .625" max. valve lift
Valve Springs, Optional:	1.300" o.d. dual spring (TFS-16306-16) 155 lbs. @ 1.820" installed height 465 lbs. @ 1.200" open 448 lbs. per inch rate .650" max. valve lift
Rocker Arms:	OEM LS7 with upgraded bearings or roller rocker arms
Minimum Bore Diameter:	4.100"
Cylinder Head Bolts/Studs:	TFS-92010 (bolts) or ARP 234-4316 (studs) for early LS engine blocks; TFS-92011 (bolts) or ARP-234-4317 (studs) for late LS engine blocks
Head Gaskets:	TFS-30694160-045 or TFS-30694160-051
Pushrod Length:	Longer than stock required
Spark Plugs:	NGK 4177

NOTES: Assembled cylinder heads include rocker arm rail mount (TFS-326LS3).
Viton® is a registered trademark of DuPont Performance Elastomers.

GM LS fans, here is a sure-fire formula for making more power:

Big bore LS engine + Trick Flow GenX 260 LS7 cylinder heads = huge power in a lightweight package.

Trick Flow's GenX 260 square port aluminum cylinder heads for GM LS7 are designed to meet the needs of enthusiasts using any LS-based engine block with a minimum bore diameter of 4.100". To improve the factory design, Trick Flow added more material to the A356-T61 aluminum castings for increased rigidity and strength. Then Trick Flow improved the valvetrain system by integrating modular one-piece, 2024-T4 billet aluminum rocker arm mounts that are removable for high-end shaft rocker setups. Trick Flow's high flow/high velocity CNC Competition Ported runners with the premium high resolution surface finish provide all-out air flow and performance throughout the entire powerband.

Other major improvements include the available 6-bolt per cylinder clamping for GMPP LSX and other aftermarket blocks, clearance for 3/8" pushrods, through-deck coolant holes to fit all GM LS gasket and block combinations, Trick-Alloy powdered-metal valve guides, solid stem valves, and two Trick Flow by PAC Racing Pacaloy™ valve spring packages.

Trick Flow GenX 260 square port cylinder heads for GM LS7 work with all LS7-style intake manifolds. The heads maintain the factory intake and exhaust port locations, valve angles, and valve locations so they work with existing LS7-based pistons. Fully assembled cylinder heads include valve springs, steel or titanium spring retainers, die forged steel valve locks, and valves. The cylinder heads are available fully assembled or as bare casting. Sold individually.

Airflow Results GenX 260 Square Port

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100	71	58
.200	148	113
.300	233	168
.400	296	212
.500	340	237
.600	375	249
.700	393	254

Tests conducted at 28" of water (pressure).
Bore size: 4.125"; exhaust with 2" pipe.

GenX 260 Heads, CNC Competition Ported Runners, Assembled

TFS-32710001-C01	1.300" dual valve springs (370 lbs./in.), 260cc intake runners
TFS-32710002-C01	1.300" dual valve springs (448 lbs./in.), 260cc intake runners
TFS-3271T001-C01	1.300" dual valve springs (370 lbs./in.) and titanium retainers, 260cc intake runners
TFS-3271T002-C01	1.300" dual valve springs (448 lbs./in.) and titanium retainers, 260cc intake runners
TFS-3271T003-C01	1.300" dual valve springs (370 lbs./in.), titanium retainers, and 6-bolt mounting pattern, 260cc intake runners
TFS-3271T004-C01	1.300" dual valve springs (448 lbs./in.), titanium retainers, and 6-bolt mounting pattern, 260cc intake runners

Compliment your new LS7 cylinder heads with a set of Trick Flow by Stainless Works headers for unbeatable, race-winning performance! You can find them on page 65.




TFS-Z0662CAT



Cylinder Head Bolt Kits for GM LS



Keep combustion where it belongs! Trick Flow's high-quality cylinder head bolt kits provide consistent clamping force from bolt-to-bolt. The bolts are made from premium quality alloy steel with cold-formed heads and rolled threads. The kit contains all the bolts you need to install a pair of heads.

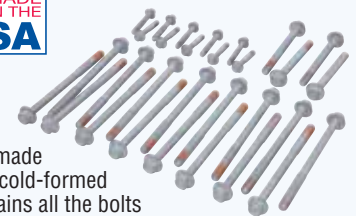

TFS-92010

TFS-92010	Cylinder head bolt kit, pre-2004 long style, torque-to-yield, each
TFS-92011	Cylinder head bolt kit, 2004 and later short style, torque-to-yield, each

GenX® 255 Square Port Cylinder Heads for GM LS3



TFS-3261T004-C01

Trick Flow engineers combined the best features of GM's LS3 and LS7 cylinder heads with Trick Flow's own unique brand of race-winning engineering and technology to create the ultimate square port LS cylinder head for 4.000" and larger bore engines—the GenX 255.

The heads feature fully CNC Competition Ported square port runners with our premium high resolution surface finish for maximum airflow and performance potential. The valve angles have been changed from 15° to 12° to increase piston-to-valve clearance and allow the use of larger camshafts. The coolant holes through the head deck were redesigned to work with all LS head gasket and engine block combinations. Stock LS3 ports accommodate LS3-style intake manifolds and LS9/LSA blower assemblies. GenX 255 heads are available with standard and 6-bolt per cylinder mounting patterns.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Airflow Results GenX 255 Square Port

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	71	59
.200"	146	113
.300"	231	171
.400"	294	215
.500"	334	240
.600"	363	252
.700"	382	258


Tests conducted at 28" of water (pressure).
Bore size: 4.065"; exhaust with 1 1/8" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

GenX 255 Heads, CNC Competition Ported Runners, Assembled

TFS-32610001-C01	1.300" dual valve springs (370 lbs./in.), 255cc intake runners
TFS-32610002-C01	1.300" dual valve springs (448 lbs./in.), 255cc intake runners
TFS-3261T001-C01	1.300" dual valve springs (370 lbs./in.) and titanium retainers, 255cc intake runners
TFS-3261T002-C01	1.300" dual valve springs (448 lbs./in.) and titanium retainers, 255cc intake runners
TFS-3261T003-C01	1.300" dual valve springs (370 lbs./in.), titanium retainers, and 6-bolt pattern, 255cc intake runners
TFS-3261T004-C01	1.300" dual valve springs (448 lbs./in.), titanium retainers, and 6-bolt pattern, 255cc intake runners

Dyno Results GenX 255 Square Port

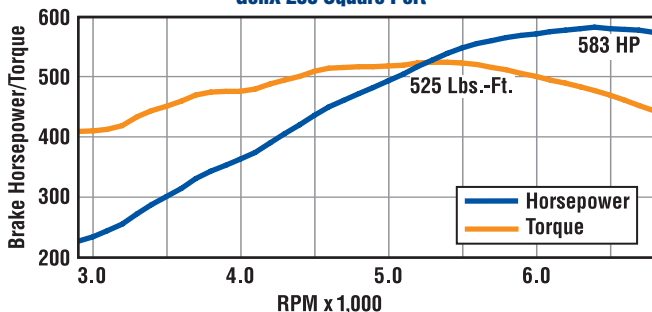

Test Engine: GM 6.2L LS3 short block with 10.43:1 compression, Trick Flow GenX® 255 square port cylinder heads (TFS-3261T002-C01), Trick Flow Track Max® hydraulic roller cam (TFS-32603001), stock L92 intake with 90mm throttle body, Kooks headers with 1 1/8" primaries, and dual exhaust with 3" Flowmaster mufflers.

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	69cc CNC-profiled
Intake Port Volume:	255cc CNC Competition Ported
Intake Port Location:	Stock LS3
Intake Port Dimensions:	2.550" x 1.250" LS3 square port
Intake Gaskets:	GM LS3/L92
Intake Valve Diameter:	2.165" (TFS-32600211)
Intake Valve Seat:	Ductile iron (TFS-51600271-1)
Exhaust Port Volume:	87cc CNC Competition Ported
Exhaust Port Location:	Stock LS3
Exhaust Port Dimensions:	1.460" x 1.700" oval
Exhaust Gaskets:	GM 12558573
Exhaust Valve Diameter:	1.600" (TFS-32600212)
Exhaust Valve Seat:	Ductile iron (TFS-30600272-1)
Valve Angles:	12°
Valve Guide Material:	Trick-Alloy powdered metal (TFS-30700252)
Valve Seals:	Viton® fluoroelastomer canister (TFS-30600455)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.480"
Valve Spring I.D. Locators:	1.300"
Valve Spring Retainers:	Steel (TFS-21400410); titanium (TFS-214T0415)
Valve Stem Locks:	7" steel (TFS-30600444)
Valve Springs, Standard:	1.300" o.d. dual spring (TFS-16904-16) 150 lbs. @ 1.800" installed height 400 lbs. @ 1.200" open 370 lbs. per inch rate .625" max. valve lift
Valve Springs, Optional:	1.300" o.d. dual spring (TFS-16306-16) 155 lbs. @ 1.820" installed height 465 lbs. @ 1.200" open 448 lbs. per inch rate .650" max. valve lift
Rocker Arms,	
Standard Valve Springs:	OEM LS3 with upgraded bearings or roller rocker arms
Rocker Arms,	
Optional Valve Springs:	Roller rocker arms recommended
Minimum Bore Diameter:	4.000"
Cylinder Head Bolts/Studs:	TFS-92010 (bolts) or ARP 234-4316 (studs) for early LS engine blocks; TFS-92011 (bolts) or ARP-234-4317 (studs) for late LS engine blocks
Head Gaskets:	TFS-32694100-045 or TFS-32694100-051
Pushrod Length:	Longer than stock required
Spark Plugs:	NGK 4177

NOTES: Assembled cylinder heads include new rocker arm rail mounts (TFS-326LS3) for use with LS3 1.7 ratio rocker arms. The OEM LS3 rocker arm rail mounts will not work with GenX 255 heads. Cylinder heads with the optional 6-bolt mounting pattern do not fit 2010 and later Chevrolet Camaro OEM exhaust manifolds; aftermarket headers are required.

Viton® is a registered trademark of DuPont Performance Elastomers.



Valve Cover Spacers for GM LS

These 1/2" thick aluminum spacers give GM LS owners the clearance they need to run shaft-mount rockers. Fit 1999-2006 engines with centerbolt valve covers; include gaskets and mounting hardware.

TFS-3060800 Valve cover spacers, pair



GenX® 205, 215, 225, 235, and 245 Cathedral Port Cylinder Heads for GM LS Vortec, LS1, LS2, and LSX



TFS-30510001-C00

These Trick Flow GenX cathedral port cylinder heads are fully CNC-machined to significantly increase the performance of GM LS-powered vehicles. Trick Flow engineers altered the valve angles from 15° to 13.5° to decrease valve shrouding, increase mid-lift airflow, and improve rocker arm-to-valve cover clearance. Material added at the rocker arm mounting points increases high-rpm valvetrain stability. The spark plugs were relocated in the CNC-profiled combustion chambers to enhance mid-lift airflow and increase the rigidity of the casting for extreme horsepower applications. Top-of-the-line CNC Competition Ported runners have a premium high resolution surface finish for maximum flow and performance.


Cylinder heads are available fully assembled or as bare castings. Sold individually.

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	C00: 58cc CNC-profiled C01: 64cc CNC-profiled C02: 65cc CNC-profiled C03/C04: 70cc CNC-profiled
Intake Port Volume:	C00: 205cc CNC Competition Ported C01: 215cc CNC Competition Ported C02: 225cc CNC Competition Ported C03: 235cc CNC Competition Ported C04: 245cc CNC Competition Ported
Intake Port Location:	Stock
Intake Port Dimensions:	3.250" x 1.070" cathedral
Intake Gaskets:	Cathedral OEM GM O-ring style
Intake Valve Diameter:	C00: 2.000" (TFS-30500211) C01: 2.040" (TFS-30600211) C02: 2.055" (TFS-30600210) C03: 2.080" (TFS-30600209) C04: 2.100" (TFS-30600208)
Intake Valve Seat:	C00: Ductile iron (TFS-30300271) C01/C02/C03/C04: Ductile iron interlock (TFS-51600271)
Exhaust Port Volume:	80cc CNC Competition Ported
Exhaust Port Location:	Stock
Exhaust Port Dimensions:	1.460" x 1.670" oval
Exhaust Gaskets:	GM 12617944
Exhaust Valve Diameter:	C00/C01/C02: 1.575" (TFS-30600212) C03/C04: 1.600" (TFS-30600213)
Exhaust Valve Seat:	C00: Ductile iron (TFS-30600272) C01/C02/C03/C04: Ductile iron interlock (TFS-30600274)
Valve Angles:	13.5°
Valve Guide Material:	C00: Trick-Alloy powdered metal (TFS-30600252) C01/C02/C03/C04: Bronze alloy (TFS-30600251)
Valve Seals:	Viton® fluoroelastomer canister (TFS-30600455)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.480"
Valve Spring I.D. Locators:	1.300" (TFS-21400442)
Valve Spring Retainers:	7" x 1.300" o.d. chromoly steel (TFS-21400410) 7" x 1.300" o.d. titanium (TFS-2140415) 7" steel with bead lock (TFS-30600444)
Valve Stem Locks:	1.300" o.d. dual spring (TFS-16306-16)
Valve Springs:	150 lbs. @ 1.800" installed height 438 lbs. @ 1.200" open 448 lbs. per inch rate .600" maximum valve lift
Rocker Arms:	C00: Roller rocker arms recommended C01/C02/C03/C04: Roller rocker arms required
Minimum Bore Diameter:	C00: 3.780" C01: 3.900" C02: 4.000" C03/C04: 4.125"
Cylinder Head Bolts:	TFS-92010
Head Gaskets:	C00/C01: TFS-30694030-045 or TFS-30694030-051 C02: TFS-30694060-045 or TFS-30694060-051 C03/C04: TFS-30694125L051, TFS-30694125R051, TFS-30694185L051, or TFS-30694185R051
Pushrod Length:	Longer than stock required
Spark Plugs:	NGK 4177

Viton® is a registered trademark of DuPont Performance Elastomers.

Dyno Results GenX 235

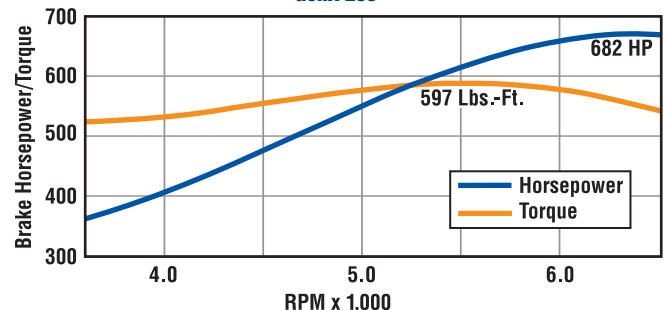

Test Engine: 10.8:1 compression GM LSX 440 c.i.d. with Trick Flow GenX® 235 cathedral port cylinder heads (TFS-3061T001-C03), Lunati custom hydraulic roller camshaft (262°/270° duration @ .050"; .629"/.629" lift; 114° lobe separation), Jesel 1.7 ratio roller rocker arms, FAST 90mm intake manifold, Kooks headers with 2" primaries, 3/2" dual exhaust with Flowmaster mufflers.

GenX 205 Heads for GM LS 4.8L/5.3L/5.7L (Vortec), CNC Competition Ported Runners, Assembled

TFS-30510001-C00	4.8L/5.3L/5.7L (Vortec), 205cc intake runners
TFS-3051T001-C00	4.8L/5.3L/5.7L (Vortec), titanium retainers, 205cc intake runners

GenX 215, 225, 235, and 245 Heads for LS1, LS2, and LSX, CNC Competition Ported Runners, Assembled

TFS-30610001-C01	LS1, 215cc intake runners
TFS-3061T001-C01	LS1, titanium retainers, 215cc intake runners
TFS-30610001-C02	LS2, 225cc intake runners
TFS-3061T001-C02	LS2, titanium retainers, 225cc intake runners
TFS-3061T001-C03	LSX, titanium retainers, standard bolt pattern, 235cc intake runners
TFS-3061T003-C03	LSX, titanium retainers, 6-bolt pattern, 235cc intake runners
TFS-3061T003-C04	LSX, titanium retainers, 6-bolt pattern, 245cc intake runners

Airflow Results GenX 235

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	65	55
.200"	144	120
.300"	229	178
.400"	287	223
.500"	323	239
.600"	340	245

Tests conducted at 28" of water (pressure).
Bore size: 4.125"; exhaust with 1 1/2" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."



GenX® 220 Cathedral Port Cylinder Heads for GM LS1 and LS2




TFS-3061T001

Trick Flow GenX 220 cylinder heads are the best value in GM LS performance. The cathedral port GenX 220 heads incorporate the features of Trick Flow's fully CNC-ported LS heads (13.5° valve angles, decreased valve shrouding, increased mid-lift airflow, relocated spark plugs, CNC-profiled combustion chambers with port-to-valve seat blending (bowl blending), improved rocker arm/valve cover clearance, and rigid casting design) in a more affordable "Fast As Cast"™ version that flows nearly as much air as our competition ported heads. The special Fast As Cast runner design duplicates the port shape and profile of fully CNC-ported runners, resulting in near-CNC-ported performance for the same price as regular cast cylinder heads.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Dyno Results GenX 220 for LS2

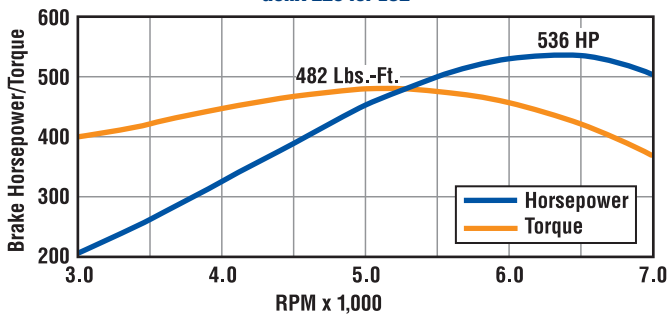

Test Engine: 10.1:1 compression GM 6.0L with Trick Flow GenX® 220 cathedral port cylinder heads (TFS-3061T002), Trick Flow Track Max® hydraulic roller camshaft (TFS-30602003), Harland Sharp 1.7 ratio roller rocker arms, FAST 90mm intake manifold, Kooks headers with 1½" primaries, 3" dual exhaust with Flowmaster mufflers.

GenX 220 Heads, Fast As Cast Runners, Assembled

TFS-30610001	LS1, 220cc intake runners
TFS-3061T001	LS1, titanium retainers, 220cc intake runners
TFS-30610002	LS2, 220cc intake runners
TFS-3061T002	LS2, titanium retainers, 220cc intake runners

Airflow Results GenX 220 for LS1

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	67	47
.200"	133	104
.300"	211	167
.400"	261	202
.500"	292	222
.600"	305	233

Tests conducted at 28" of water (pressure).
Bore size: 3.900"; exhaust with 1½" pipe.

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	01: 64cc CNC-profiled 02: 65cc CNC-profiled 220cc Fast As Cast
Intake Port Volume:	Stock
Intake Port Location:	Stock
Intake Port Dimensions:	3.250" x 1.070" cathedral
Intake Gaskets:	Cathedral OEM GM O-ring style
Intake Valve Diameter:	01: 2.040" (TFS-30600211) 02: 2.055" (TFS-30600210)
Intake Valve Seat:	Ductile iron interlock (TFS-51600271)
Exhaust Port Volume:	80cc Fast As Cast
Exhaust Port Location:	Stock
Exhaust Port Dimensions:	1.460" x 1.670" oval
Exhaust Gaskets:	GM 12617944
Exhaust Valve Diameter:	1.575" (TFS-30600212)
Exhaust Valve Seat:	Ductile iron interlock (TFS-30600274)
Valve Angles:	13.5°
Valve Guide Material:	Bronze alloy (TFS-30600251)
Valve Seals:	Viton® fluoroelastomer canister (TFS-30600455)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.480"
Valve Spring I.D. Locators:	1.300" (TFS-21400442)
Valve Spring Retainers:	7" x 1.300" o.d. steel (TFS-21400410) 7" x 1.300" o.d. titanium (TFS-2140415)
Valve Stem Locks:	7" steel bead lock (TFS-30600444)
Valve Springs:	1.300" o.d. dual spring (TFS-16306-16) 150 lbs. @ 1.800" installed height 438 lbs. @ 1.200" open 448 lbs. per inch rate .600" maximum valve lift
Cylinder Head Bolts:	TFS-92010
Rocker Arms:	Roller rocker arms required
Minimum Bore Diameter:	01: 3.900" 02: 4.000"
Head Gaskets:	01: TFS-30694030-045 or TFS-30694030-051 02: TFS-30694060-045 or TFS-30694060-051
Pushrod Length:	Longer than stock required
Spark Plugs:	NGK 4177

Viton® is a registered trademark of DuPont Performance Elastomers.



Timing Chain Damper and Adapter Bracket for GM LS

This timing chain damper from Trick Flow provides a small amount of tension on the timing chain to keep it from "whipping" during gear changes and damaging the engine. It's manufactured from durable OE-quality plastic and includes mounting bolts. The damper fits non-VVT (variable valve timing) GM LS2/L92/LS3 engines, and it should be replaced when changing camshafts or timing chain sets.

The timing chain damper adapter bracket allows the use of LS2 timing chain dampers on any GM LS engine block. The bracket uses the three lower cam/thrust retainer plate bolts for attachment. The bracket can also be used with aftermarket LS2 timing chain dampers (such as TFS-30675540) with the included hardware.


TFS-30675540	Timing chain damper, LS2/L92/LS3 non-VVT engines, each
TFS-30675600	Timing chain damper adapter bracket, each
TFS-K30675600	Timing chain damper and adapter bracket kit, each



TFS-30675540



TFS-30675600

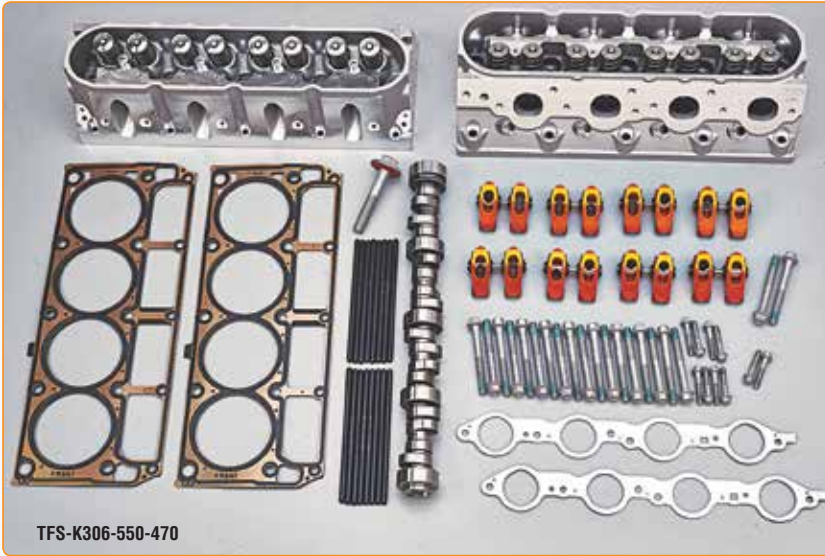

GenX Top-End Engine Kits for GM LS

Don't waste time trying to figure out which parts you need to get the performance you want—Trick Flow has already done the work for you!



Trick Flow's GenX top-end engine kits for GM LS are designed and dyno-tested to deliver the performance you want for less than purchasing the parts separately. Each kit includes a pair of Trick Flow GenX CNC Competition Ported cylinder heads, a specially matched Track Max® hydraulic roller cam, Harland Sharp roller rocker arms (except TFS-K326-580-520), heat-treated chromoly pushrods, performance head and exhaust gaskets, Trick Flow head bolts, and balancer bolt. GenX top-end kits are not recommended for vehicles with flex fuel or active fuel management. Tuning is required for maximum performance.

NOTE: The top-end kit for GM LS3 (TFS-K326-580-520) does not include roller rocker arms. It is recommended that builders use OEM rocker arms with upgraded bearings.

GenX Top-End Engine Kits for GM LS1

- TFS-K306-485-460 Top-end engine kit, 485 HP/460 lbs.-ft. torque, each
- TFS-K306-500-460 Top-end engine kit, 500 HP/460 lbs.-ft. torque, each
- TFS-K306-515-460 Top-end engine kit, 515 HP/460 lbs.-ft. torque, each

NOTE: These kits were dyno-tested on a stock GM 5.7L LS1 short block with 10.5:1 compression, Trick Flow GenX 215 cathedral port cylinder heads (TFS-3060T001-C01), Track Max hydraulic roller cam (TFS-30602001), and an LS6 intake manifold. 1997-98 engines require centerbolt valve covers (sold separately).

GenX Top-End Engine Kit for GM LS2

- TFS-K306-550-470 Top-end engine kit, 550 HP/470 lbs.-ft. torque, each

NOTE: This kit was dyno-tested on a GM 6.0L LS2 short block with 10.86:1 compression, Trick Flow GenX 225 cathedral port cylinder heads (TFS-3060T001-C02), Track Max hydraulic roller cam (TFS-30602004), stock intake manifold with 90mm throttle body, Kooks headers with 1 1/4" primaries, and dual exhaust with 3" Flowmaster mufflers.

GenX Top-End Engine Kit for GM LS3

- TFS-K326-580-520 Top-end engine kit, 580 HP/525 lbs.-ft. torque, each

NOTE: This kit was dyno-tested on a GM 6.2L LS3 short block with 10.43:1 compression, Trick Flow GenX 255 square port cylinder heads (TFS-3261T002-C01), Trick Flow Track Max hydraulic roller cam (TFS-32603001), stock L92 intake manifold with 90mm throttle body, Kooks headers with 1 1/4" primaries, and dual exhaust with 3" Flowmaster mufflers.


GenX Top-End Engine Kit for GM LS Truck

- TFS-K305-455-425 Top-end engine kit, 455 HP/425 lbs.-ft. torque, each


NOTE: This kit was dyno-tested on a GM Performance Parts LS327 short block engine with Trick Flow GenX 205 cathedral port cylinder heads (TFS-30500001-C00), Track Max hydraulic roller cam (TFS-30602001), chromoly pushrods (TFS-21407500), Harland Sharp roller rocker arms, and stock GM LS truck intake manifold and 78mm throttle body.

GenX Top-End Engine Kit Dyno Results


TFS-K306-485-460

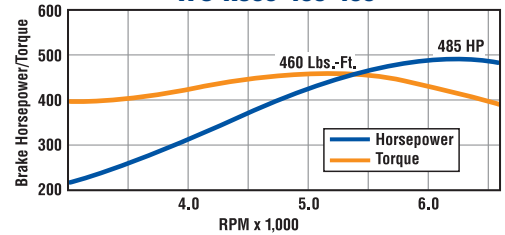


TFS-K306-500-460

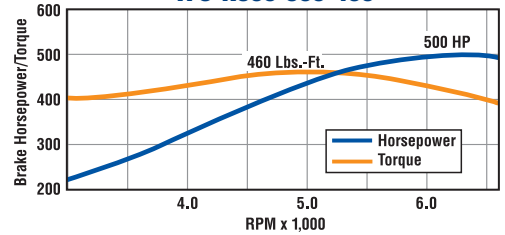


TFS-K306-515-460

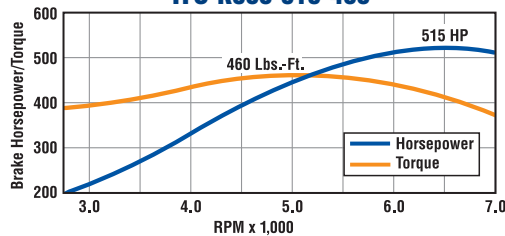


TFS-K306-550-470

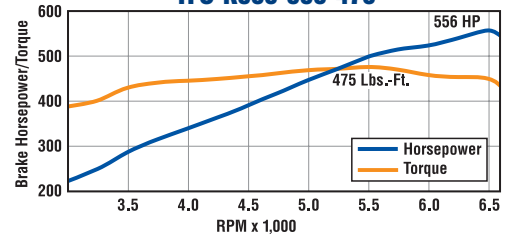


TFS-K326-580-520

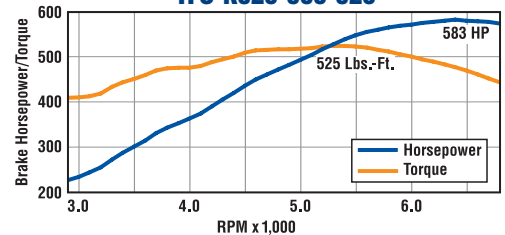

TFS-K305-455-425

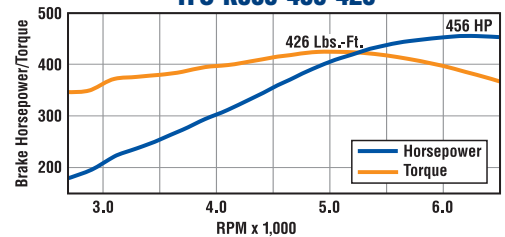


Track Max® Hydraulic Roller Camshafts for GM LS

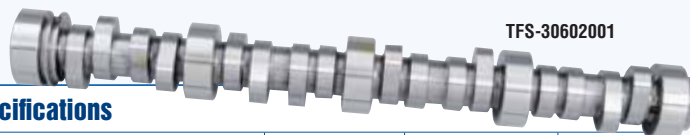

TFS-30602001

Camshaft Specifications

Part Number		Characteristics	Duration @ .050"	Valve Lift w/1.7 Rocker	Lobe Sep.
TFS-30602001		Applications: All GM LS engines. Street/strip; excellent idle, strong midrange power, 2,000-6,000 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	216°/220°	.560°/.560°	114°
TFS-30602002		Applications: All GM LS engines. Street/strip; good idle, strong midrange/top-end power, 2,500-6,300 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	220°/224°	.575°/.575°	112°
TFS-30602003		Applications: All GM LS engines. Street/strip; fair idle, good midrange/strong top-end power, 2,500-6,500 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	228°/230°	.585°/.585°	112°
TFS-30602004		Applications: All GM LS engines. Street/strip; fair idle, good midrange/strong top-end power, 3,000-7,000 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	238°/242°	.595°/.595°	112°
TFS-32603001		Applications: Optimized for GM LS3/L92 engines; works with all GM LS engines. Street/strip; fair idle, good midrange/strong top-end power, 3,000-7,000 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	230°/238°	.625°/.625°	113°

Trick Flow by PAC Racing Valve Spring Upgrade Kits for GM LS

Valvetrain control is critical in performance engines. Boost the performance of your GM LS-powered muscle car or truck with Trick Flow by PAC Racing valve spring sets or valve spring upgrade kits.



TFS-2500300

The PAC springs are manufactured from premium Pacaloy™ chrome-silicone steel that's double shot-peened beyond AMS (Aerospace Material Specifications) reliability standards for exceptional endurance.



Drop-In Beehive Valve Spring Sets

These PAC beehive valve springs are specifically designed as a drop-in upgrade for mildly modified engines. They work with the stock retainers, locks, locators, and seals.

- TFS-16915-16 Drop-in valve spring set, chromoly retainers, 105 lbs. seat pressure @ 1.800" and 293 lbs. open pressure @ 1.200", 1.140" coil bind, set of 16
- TFS-16918-16 Drop-in valve spring set, chromoly retainers, 130 lbs. seat pressure @ 1.800" and 318 lbs. open pressure @ 1.200", 1.140" coil bind, set of 16

Valve Spring Upgrade Kits

The PAC spring upgrade kits include everything you need to upgrade the valve springs on your mid-to-heavily modified LS engines with stock GM or Trick Flow LS heads. Kit contents include dual valve springs, retainers, locks, seals, .500" I.D. locators (except where noted), and instructions.

- TFS-2500280* Valve spring upgrade kit, chromoly retainers, 140 lbs. seat pressure @ 1.800" and 380 lbs. open pressure @ 1.200", 1.064" coil bind, each
- TFS-2500285* Valve spring upgrade kit, titanium retainers, 140 lbs. seat pressure @ 1.800" and 380 lbs. open pressure @ 1.200", 1.064" coil bind, each
- TFS-2500295^ Valve spring upgrade kit, chromoly retainers, 150 lbs. seat pressure @ 1.800" and 438 lbs. open pressure @ 1.200", 1.100" coil bind, each
- TFS-2500300^ Valve spring upgrade kit, titanium retainers, 150 lbs. seat pressure @ 1.800" and 439 lbs. open pressure @ 1.200", 1.150" coil bind, each
- TFS-2500400† Valve spring upgrade kit, titanium retainers, 135 lbs. seat pressure @ 1.800" and 400 lbs. open pressure @ 1.200", 1.100" coil bind, each

*OE rocker arm bearing upgrade kit recommended, part number SME-143002.

^Not recommended for use with OE rocker arms.

†Includes .570" I.D. locators.

True Roller Timing Chain Sets for GM LS



These billet steel timing sets from Trick Flow for GM LS are engineered for durability and versatility. The .250" diameter, double-row true roller chain and black oxide-coated crank sprocket are heat-treated for unrivaled strength. The CNC-machined cam gear has nine crank sprocket keyways for zero and +/- 2°, 4°, 6°, or 8° timing adjustments. The timing marks are laser-etched.



TFS-30678534

- TFS-30678533 Timing chain set, LS1, each
- TFS-30678534 Timing chain set, LS2, each
- TFS-30778535 Timing chain set, 58X/4X camshaft sensor, 1-bolt, L92/LS3, each
- TFS-30778536 Timing chain set, 58X/4X camshaft sensor, 3-bolt, L92/LS3, each



SME-143002

SME-906011

Rocker Arm Upgrade Components for GM LS



As many have learned, the OE rocker arm bearing design is a proven weak link in high performance LS engines. One way to fix the problem is with a full set of high quality roller rocker arms. However, new rocker arms are very expensive. Trick Flow has another solution that will cure the bearing problem for far less money.

These rocker arm trunnion upgrade kits from Trick Flow include 16 stronger trunnions with circlip grooves that withstand the high valve spring pressures and repeated high RPM blasts common in performance applications. The kit also includes 32 bearings with precision made needles constructed to handle sustained racing use plus 32 retainer clips that eliminate the bearing walk-out problem of the OE design.

The trunnion installation kit takes all of the hassle out of removing old trunnions and installing new ones. That's because the kit allows you to change the trunnions using just a bench vise instead of a cumbersome hydraulic press like other kits. Maybe best of all, no modifications are required to the OE rocker arms to use these upgrade and installation kits!

- SME-143002 Trunnion upgrade kit, each
- SME-906011 Trunnion installation kit, each
- SME-143002-B Replacement trunnion shaft bearings, pair

Viton® is a registered trademark of DuPont Performance Elastomers.



TFX™ EFI Fuel Rails for GM LS



These TFX billet fuel rails from Trick Flow were developed to allow owners of high performance GM LS-powered vehicles to build custom fuel systems. Includes specially constructed mounting brackets to keep the fuel rails tucked in close to the engine to prevent hood and intake manifold interference.

NOTE: Fits 1997-2004 LS1 and 2001-04 LS6; does not fit LS2.

TFS-3068000R EFI fuel rails, pair



TFS-24080



TFX™ EFI Throttle Bodies for GM LS

Add 5-15 more rear-wheel horsepower in less than an hour with a Trick Flow TFX EFI throttle body. The cast aluminum throttle bodies are crafted with hand-assembled butterflies for maximum quality and dependability. Idle adjustment is as easy as turning a screw, so you'll be enjoying that new power and responsiveness in no time. These throttle bodies benefit from multiple throttle linkages for a wide variety of custom installations. Includes gaskets and mounting hardware.

TFS-24080 Throttle body, 1998-2002 5.7L Chevrolet/Pontiac Camaro/Firebird, 2004 GTO, 80mm, each

TFS-24085† Throttle body, 1998-2002 5.7L Chevrolet/Pontiac Camaro/Firebird, 2004 GTO, 85mm, each

†50-State emissions legal under CARB E.O. #D-369-10.




TFS-32600112

R-Series Intake Manifolds for GM LS3

Trick Flow R-Series single plane intake manifolds for GM LS3 bring the simplicity of carbureted aspiration to GM's late model aluminum powerhouse. The intakes are engineered to produce supreme power in heavily modified street/strip and race engines with 3,500-7,500 plus RPM powerbands. Other significant features include A319 aluminum construction, a one-piece spider-type design, high-flow individual runners combined with a raised plenum floor, integral bosses for adding nitrous or fuel injection nozzles, and extra material for custom porting. The carbureted manifold is designed for Holley 4150-style square bore carburetors; the carb-style EFI version accepts standard Bosch and Siemens type fuel injectors. Overall height to the mounting pads is 6.285".

TFS-32600111 Manifold, square bore carburetor, each

TFS-32600112 Manifold, carb-style EFI, each

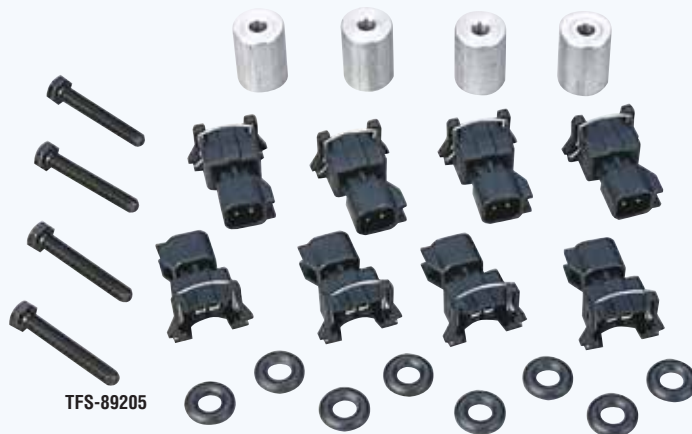

TFS-89205

TFX™ Fuel Injector Connectors and Adapters for GM LS

Trick Flow's TFX fuel injector connectors and adapters make swapping intake manifolds and fuel injectors on late-model GM LS-based engines quick and painless. No cutting is necessary, and they are made to OEM specifications for a secure connection and to keep the contacts free of water, dirt, and debris.



- TFS-89200 Connector, EV1 injector, each
- TFS-89201 Adapter, EV1 injector to EV6 harness, each
- TFS-89202 Adapter, EV6 injector to EV1 harness, each
- TFS-89205 Adapter kit, LS2/L92 harness to EV1 injector, each



TFS-30600600

TFS-30600612

TFS-30600611

Steam Line Plumbing Kits and Accessories for GM LS

Trick Flow steam line plumbing kits and accessories allow owners of modified LS-powered cars and trucks to upgrade the factory steam tubes to the more desirable and easier-to-service race car plumbing system.

The plumbing kits are available two ways—just for the front of the heads or for all four corners. They include all of the necessary hose, fittings, and other components needed for installation. Plus, the components are available separately for those who want to design a custom system.

Steam Line Plumbing Kits, Black Rubber Hose

- TFS-30600600 Steam line plumbing kit, front of heads only, each
- TFS-30600601 Steam line plumbing kit, front and rear of heads, each

Steam Line Plumbing Kits, Black Nylon Braided AN Hose

- TFS-306SB600 Steam line plumbing kit, front of heads only, each
- TFS-306SB601 Steam line plumbing kit, front and rear of heads, each

Steam Line Plumbing Kits, Stainless Steel Braided AN Hose

- TFS-306S0600 Steam line plumbing kit, front of heads only, each
- TFS-306S0601 Steam line plumbing kit, front and rear of heads, each

Steam Line Individual Components

- TFS-30600611 Steam line fitting, -4 AN male, each
- TFS-30600612 Steam line cap, each
- TFS-30600613 Steam line fitting, 1/8" female NPT, 90°, each
- TFS-30600615 Cylinder head coolant sensor plug and seal, 12mm, each

GM LS

GenX® 185 and 195 Cylinder Heads for GM LT1




TFS-30410008-M54

Trick Flow GenX 185 cylinder heads for naturally aspirated GM LT1 engines retain the factory compression ratio and have standard resolution CNC-profiled combustion chambers to amplify performance. The valve angles were reduced to 21° to increase piston-to-valve clearance and unshroud the chambers for better airflow. Power-building Fast As Cast® runners duplicate the profiles of fully CNC-ported heads, resulting in high airflow rates without costly CNC-porting.

GenX 195 heads for forced induction engines retain the stock 23° valve angles and feature large, standard cast combustion chambers to reduce compression and large Fast As Cast® runners to substantially increase horsepower and torque in boosted applications. Both versions retain the use of stock sensors and fittings.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Dyno Results GenX 185

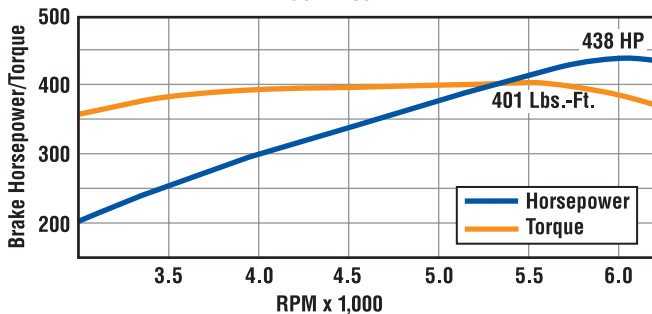

Test Engine: 10.42:1 compression 350 c.i.d. with Trick Flow GenX® 185 cylinder heads (TFS-30410008-M54), Trick Flow Track Max® hydraulic roller camshaft (TFS-31402081), Trick Flow 1.6 ratio roller rocker arms (TFS-31400513), stock GM intake manifold and 52mm throttle body, Hooker Super Competition headers with 1½" primaries, 3" dual exhaust with Flowmaster mufflers.

GenX 185 and 195 Heads, Fast As Cast Runners, Assembled

TFS-30410008-M54
TFS-30410010

Naturally aspirated engines, 21° valve angle, 185cc intake runners
Forced induction engines, 23° valve angle, 195cc intake runners

Airflow Results GenX 185

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	65	48
.200"	132	111
.300"	195	151
.400"	236	182
.500"	258	198
.600"	260	206

Tests conducted at 28" of water (pressure).
Bore size: 4.030"; exhaust with 1½" pipe.

Airflow Results GenX 195

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	51	58
.200"	136	98
.300"	191	136
.400"	230	163
.500"	253	177
.600"	254	190

Tests conducted at 28" of water (pressure).
Bore size: 4.030"; exhaust with 1½" pipe.

Specifications


- Material: A356-T61 aluminum
- Combustion Chamber Volume: M54: 54cc CNC-profiled
10: 62cc standard
- Intake Port Volume: M54: 185cc Fast As Cast
10: 195cc Fast As Cast
- Intake Port Location: Stock
- Intake Port Dimensions: M54: 1.220" x 2.120"
10: 1.280" x 2.090"
- Intake Gaskets: Fel-Pro 1284
- Intake Valve Diameter: 2.020" (TFS-51400211)
- Intake Valve Seat: M54: Ductile iron (TFS-30300271)
10: Tungsten alloy (TFS-51400271)
- Exhaust Port Volume: M54: 67cc Fast As Cast
10: 72cc Fast As Cast
- Exhaust Port Location: Stock
- Exhaust Port Dimensions: 1.350" x 1.450" D-shape
- Exhaust Gaskets: Fel-Pro 1404
- Exhaust Valve Diameter: 1.600" (TFS-51400212)
- Exhaust Valve Seat: M54: Ductile iron (TFS-30300272)
10: Tungsten alloy (TFS-51400272)
- Valve Angles: M54: 21°
10: 23°
- Valve Guide Material: Bronze alloy (TFS-51400252)
- Valve Seals: Viton® fluororelastomer (TFS-51400454)
- Valve Seat Angles: 45° x multi-angle
- Valve Spring Pocket Diameter: M54: 1.615"
10: 1.615"; 1.500" for two center valve springs
- Valve Spring Cups: M54: 1.280" (TFS-31400433)
10: 1.500" (TFS-51400434)
- Valve Spring Retainers: 7" x 1.250" o.d. chromoly steel (TFS-31400423)
- Valve Stem Locks: 7" steel (TFS-51400444)
- Valve Springs: M54: 1.300" o.d. dual spring with damper
(TFS-16306-16)
150 lbs. @ 1.800" installed height
450 lbs. @ 1.200" open
448 lbs. per inch rate
.600" maximum valve lift
10: 1.460" o.d. dual spring with damper
(TFS-16315-16)
125 lbs. @ 1.800" installed height
376 lbs. @ 1.180" open
420 lbs. per inch rate
.600" maximum valve lift
5/16" (TFS-30400623-8)
3/8" (TFS-51400613)
- Guideplates: TFS-31400512 (1.5 ratio, 3/8" studs)
TFS-31400513 (1.6 ratio, 3/8" studs)
TFS-31400514 (1.5 intake/1.6 exhaust ratio,
3/8" studs)
- Minimum Bore Diameter: 4.000"
- Cylinder Head Bolts: TFS-92000
- Head Gaskets: TFS-30494040-040
- Pushrod Length: Longer than stock required
- Spark Plugs: M54: NGK 4177 or 3403
10: NGK FR5 or Autolite 3924

NOTE: TFS-30400008-M54 includes LT1 and LT4 intake gasket alignment holes.
Viton® is a registered trademark of DuPont Performance Elastomers.





Track Max® Hydraulic Roller Camshaft for GM LT1

		Camshaft Specifications			
Part Number		Characteristics	Duration @ .050"	Valve Lift w/1.5 Rocker Arms	Lobe Sep.
TFS-31402081		Street/strip; fair idle, strong midrange power, 1,800-5,800 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 10.25:1 minimum.	220°/227°	.530"/.530"	113°



GenX® Top-End Engine Kit for GM LT1


Get the most out of your GM LT1 with Trick Flow's top-end engine kit. Trick Flow engineers carefully tuned this kit to deliver optimum horsepower and torque—taking the time and guesswork out of designing a winning combination and saving you some hard-earned cash in the process.

GenX top-end kits for GM LT1 feature Trick Flow's GenX 185 21° heads to deliver increased power on naturally aspirated engines. These heads feature 54cc CNC-profiled combustion chambers with port-to-valve seat blending (bowl blending) and Fast As Cast® runners (185cc intake/67cc exhaust). You also get a Track Max® hydraulic roller camshaft, pushrod length checker, roller rocker arms, head bolts, and a gasket set.

GenX LT1 Top-End Engine Kit

TFS-K304-430-400 430 HP/400 lbs.-ft., each

GenX LT1 Top-End Engine Kit Dyno Results
TFS-K304-430-400

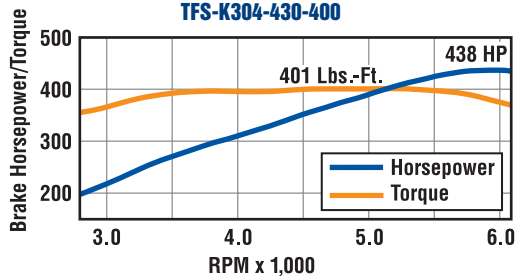

Test Engine: 350 c.i.d. short block with Trick Flow GenX® 185 cylinder heads (TFS-30410008-M54), Trick Flow Track Max® hydraulic roller camshaft (TFS-31402081), 10.42:1 compression, stock intake manifold, and factory 52mm throttle body.



TFX™ Cold Air Intake Kits and Air Inlet Elbows for GM LT1

If you're serious about wringing the maximum amount of power from your LT1, you must eliminate intake restrictions. The same engineers who designed the best LT1 heads available developed the best high-flow cold air intake kit and air inlet elbow available for your car, too!

Trick Flow's cold air intake kit for LT1 replaces the restrictive stock airbox with a freer-flowing unit and reusable cotton-gauze filter to dramatically increase airflow to the engine. The kit includes the airbox, filter, mounting hardware, and instructions. Manufactured by K&N for Trick Flow; 50-state emissions-legal under CARB E.O. #D-369-14.

Cold Air Intake Kits

- TFS-23057 Cold air kit, 1993-97 5.7L LT1 Chevrolet/Pontiac Camaro/Firebird, each
- TFS-23058 Cold air kit, 1994-96 5.7L LT1 Chevrolet Impala SS/Caprice, each



Replace the ugly, performance-robbing factory rubber elbow with Trick Flow's air inlet elbow. Designed to increase airflow and power and add a splash of dress-up under the hood, they eliminate the factory resonator tube and include all provisions for factory sensors. These elbows work with all stock air inlet systems and most brands of cold air intake kits.

Air Inlet Elbows

- TFS-3150800 Air inlet elbow, aluminum, ceramic coated, each
- TFS-3150801 Air inlet elbow, aluminum, black, each
- TFS-315B800 Air inlet elbow, aluminum, natural, each

If you work on engines, then you need a Trick Flow valve spring compressor. Our specially made tools easily remove valve springs—even while they're on an engine still in the vehicle. Check them out on page 53.



Super 23® 175 Cylinder Heads for Small Block Chevrolet

Made to outperform factory small block Chevy heads on 283-350 c.i.d. street performance engines, Trick Flow Super 23 175 cylinder heads feature small cross-section intake runners to promote low-rpm torque and high-rpm horsepower on small bore engines. Fast As Cast® runners duplicate the runner profile and performance levels of CNC-ported heads—for about the same price as ordinary cast heads! Other features include angled spark plugs, raised valve cover rails, and extra-thick decks and walls for porting.

Super 23 175 heads are 50-state emissions-legal under CARB E.O. #D-369-6 for 1995 and earlier GM vehicles with Chevy 262–350 engines and accept most factory accessories.

Cylinder heads are available fully assembled or as bare castings. Sold individually.



TFS-30310007

Airflow Results Super 23 175

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	62	57
.200"	127	109
.300"	180	142
.400"	219	167
.500"	242	181
.600"	245	192

Tests conducted at 28" of water (pressure).
Bore size: 4.030"; exhaust with 1¼" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

Super 23 175 Heads, Fast As Cast Runners, Assembled

TFS-30310001	1.250" single valve springs, perimeter bolt valve covers, 175cc intake runners
TFS-30310002	1.470" single valve springs, perimeter bolt valve covers, 175cc intake runners
TFS-30310003	1.460" dual valve springs, perimeter bolt valve covers, 175cc intake runners
TFS-30310005	1.250" single valve springs, center bolt valve covers, 175cc intake runners
TFS-30310006	1.470" single valve springs, center bolt valve covers, 175cc intake runners
TFS-30310007	1.460" dual valve springs, center bolt valve covers, 175cc intake runners

Trick Flow Fast Fact: Efficiency

Pushrod length greatly affects the efficiency of the motion transfer to the valves by altering the tip travel of the rocker arms. For maximum valvetrain efficiency, rocker arm tip travel on the valve stem should be .080" or less.

As a rule, longer pushrods will decrease rocker arm tip travel. If you can't get a tip travel measurement of .080" or less after trying several pushrod lengths, you will have to switch to another brand of rocker arms and start over.

When checking pushrod length with roller tip rocker arms, note the position of the roller tip on the valve stem when the valve is at one-half of its net lift. Ideally, the centerline of the rocker arm's tip should coincide with the centerline of the valve at one-half of its net lift so the rocker arm tip travels an equal distance on each half of the valve stem tip.

If you have questions about checking pushrod length or pushrod/rocker arm recommendations for your combination, contact the Trick Flow Technical Department at 1-330-630-1555, Monday through Friday from 9:00 am to 5:00 pm EST.

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	56cc standard
Intake Port Volume:	175cc Fast As Cast
Intake Port Location:	Stock
Intake Port Dimensions:	1.230" x 1.990"
Intake Gaskets:	Fel-Pro 1256
Intake Valve Diameter:	1.940" (TFS-30300211)
Intake Valve Seat:	Ductile iron (TFS-30300271)
Exhaust Port Volume:	67cc Fast As Cast
Exhaust Port Location:	Stock
Exhaust Port Dimensions:	1.300" x 1.350" D-shape
Exhaust Gaskets:	Fel-Pro 1404
Exhaust Valve Diameter:	1.500" (TFS-30300212)
Exhaust Valve Seat:	Ductile iron (TFS-30300272)
Valve Angles:	23°
Valve Guide Material:	Bronze alloy (intake TFS-51400252-1, exhaust TFS-30400252-1)
Valve Seals:	Viton® fluoroelastomer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.615"; 1.500" for two center valve springs
Valve Spring Cups:	1.480" (TFS-51400434)
Valve Spring Retainers:	7° x 1.250" o.d. chromoly steel (TFS-31400423) 7° x 1.437"-1.500" o.d. chromoly steel (TFS-51400423)
Valve Stem Locks:	7° stamped steel (TFS-31400443) 7° machined steel (TFS-31400444)
Valve Springs, Standard:	1.250" o.d. single spring with damper (TFS-16314-16) 110 lbs. @ 1.800" installed height 300 lbs. @ 1.280" open 360 lbs. per inch rate .480" maximum valve lift
Valve Springs, Option 1:	1.470" o.d. single spring with damper (TFS-16514-16) 120 lbs. @ 1.780" installed height 300 lbs. @ 1.280" open 360 lbs. per inch rate .540" maximum valve lift
Valve Springs, Option 2:	1.460" o.d. dual spring with damper (TFS-16315-16) 125 lbs. @ 1.780" installed height 376 lbs. @ 1.180" open 420 lbs. per inch rate .600" maximum valve lift
Guideplates:	5/16" (TFS-30400623-8)
Rocker Arm Studs:	3/8" (TFS-51400613)
Rocker Arms:	TFS-31400510 (1.5 ratio, 3/8" studs) TFS-31400511 (1.6 ratio, 3/8" studs)
Minimum Bore Diameter:	3.750"
Cylinder Head Bolts:	TFS-92000
Head Gaskets:	TFS-30494060-040
Pushrod Length:	Longer than stock required
Spark Plugs:	NGK FR5 or Autolite 3924
NOTE:	Must use 350 or larger head gasket on 305 engines.
Viton® is a registered trademark of DuPont Performance Elastomers.	



Super 23® 195 Cylinder Heads for Small Block Chevrolet



TFS-30410015-M72

Trick Flow Super 23 195 cylinder heads for small block Chevy are a direct fit, high performance replacement for factory heads and accept most original accessories. Ideal for 302-406 c.i.d. engines, these heads feature high-velocity, small cross-section intake runners to promote low-rpm torque and high-rpm horsepower. Fast As Cast® runners deliver near-CNC-ported flow and performance for about the same price as regular cast heads. Angled spark plugs, raised valve cover rails, and extra-thick decks and walls for porting round-out the features.


Super 23 195 heads are 50-state emissions-legal under CARB E.O. #D-369-16 for 1995 and earlier GM vehicles with Chevy 262-350 engines.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	01/02/03/05/06/07: 62cc standard M64: 64cc CNC-profiled M72: 72cc CNC-profiled
Intake Port Volume:	195cc Fast As Cast
Intake Port Location:	Stock
Intake Port Dimensions:	1.280" x 2.090"
Intake Gaskets:	Fel-Pro 1205 or 1266
Intake Valve Diameter:	2.020" (TFS-51400211)
Intake Valve Seat:	Tungsten alloy (TFS-31400271)
Exhaust Port Volume:	72cc Fast As Cast
Exhaust Port Location:	Stock
Exhaust Port Dimensions:	1.350" x 1.500" D-shape
Exhaust Gaskets:	Fel-Pro 1404
Exhaust Valve Diameter:	1.600" (TFS-51400212)
Exhaust Valve Seat:	Tungsten alloy (TFS-31400272)
Valve Angles:	23°
Valve Guide Material:	Bronze alloy (intake TFS-51400252-1, exhaust TFS-30400252-1)
Valve Seals:	Viton® fluoroelastomer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.615"; 1.500" for two center valve springs
Valve Spring Cups:	1.480" (TFS-51400434)
Valve Spring Retainers:	7° x 1.250" o.d. chromoly steel (TFS-31400423) 7° x 1.437"-1.500" o.d. chromoly steel (TFS-51400423)
Valve Stem Locks:	7° stamped steel (TFS-31400443) 7° machined steel (TFS-31400444)
Valve Springs, Standard:	1.250" o.d. single spring with damper (TFS-16314-16) 110 lbs. @ 1.780" installed height 300 lbs. @ 1.280" open 360 lbs. per inch rate .520" maximum valve lift
Valve Springs, Option 1:	1.470" o.d. single spring with damper (TFS-16514-16) 120 lbs. @ 1.780" installed height 300 lbs. @ 1.280" open 360 lbs. per inch rate .540" maximum valve lift
Valve Springs, Option 2:	1.460" o.d. dual spring with damper (TFS-16315-16) 125 lbs. @ 1.780" installed height 376 lbs. @ 1.180" open 420 lbs. per inch rate .600" maximum valve lift
Guideplates:	5/16" (TFS-30400623-8)
Rocker Arm Studs:	3/8" (TFS-51400613)
Rocker Arms:	TFS-31400510 (1.5 ratio, 3/8" studs) TFS-31400511 (1.6 ratio, 3/8" studs)
Minimum Bore Diameter:	4.000"
Cylinder Head Bolts:	TFS-92000
Head Gaskets:	TFS-30494060-040
Pushrod Length:	Longer than stock required
Spark Plugs:	NGK FR5 or Autolite 3924
NOTE:	Must use Fel-Pro 1014 head gaskets with drilled steam holes for 400 c.i.d.; must modify heads per instructions.
	Viton® is a registered trademark of DuPont Performance Elastomers.

Dyno Results Super 23 195

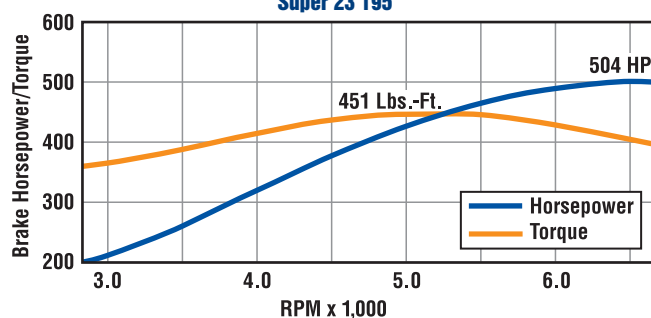

Test Engine: 10:1 compression 383 c.i.d. with Trick Flow Super 23® 195 cylinder heads (TFS-30410013-M72), Trick Flow Track Max® hydraulic roller camshaft (TFS-31402002), Trick Flow 1.5 ratio roller rocker arms (TFS-31400510), Edelbrock Victor Jr. intake manifold, Hooker headers with 1½" primaries, 3" dual exhaust with Flowmaster mufflers.

Super 23 195 Heads, Fast As Cast Runners, Assembled

62cc Standard Combustion Chambers

TFS-30410001	1.250" single springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410002	1.470" single springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410003	1.460" dual springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410005	1.250" single springs, center bolt valve covers, 195cc intake runners
TFS-30410006	1.470" single springs, center bolt valve covers, 195cc intake runners
TFS-30410007	1.460" dual springs, center bolt valve covers, 195cc intake runners

64cc CNC-Profiled Combustion Chambers

TFS-30410001-M64	1.250" single springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410002-M64	1.470" single springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410003-M64	1.460" dual springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410005-M64	1.250" single springs, center bolt valve covers, 195cc intake runners
TFS-30410006-M64	1.470" single springs, center bolt valve covers, 195cc intake runners
TFS-30410007-M64	1.460" dual springs, center bolt valve covers, 195cc intake runners

72cc CNC-Profiled Combustion Chambers

TFS-30410012-M72	1.470" single springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410013-M72	1.460" dual springs, perimeter bolt valve covers, 195cc intake runners
TFS-30410014-M72	1.470" single springs, center bolt valve covers, 195cc intake runners
TFS-30410015-M72	1.460" dual springs, center bolt valve covers, 195cc intake runners

Airflow Results

Super 23 195 with 72cc CNC-Profiled Chambers

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	71	53
.200"	142	99
.300"	196	135
.400"	234	167
.500"	249	186
.600"	249	199


Tests conducted at 28" of water (pressure). Bore size 4.030". CNC-profiled combustion chambers; exhaust with 1¼" pipe.
To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."



Super 23® 215 Cylinder Heads for Small Block Chevrolet


Trick Flow Super 23 215 cylinder heads give a huge performance boost to race-ready small block Chevy engines. Based on the proven Super 23 head design (angled spark plugs, extra-thick decks and walls for porting, and raised valve cover rails), the Super 23 215 heads feature enlarged valve springs to help pull in more air and fuel with higher lift cams. The larger Fast As Cast® runner design provides near-CNC-ported airflow and power for about the same price as most cast heads. The result is more airflow in the mid and upper rpm range—and that means more power.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

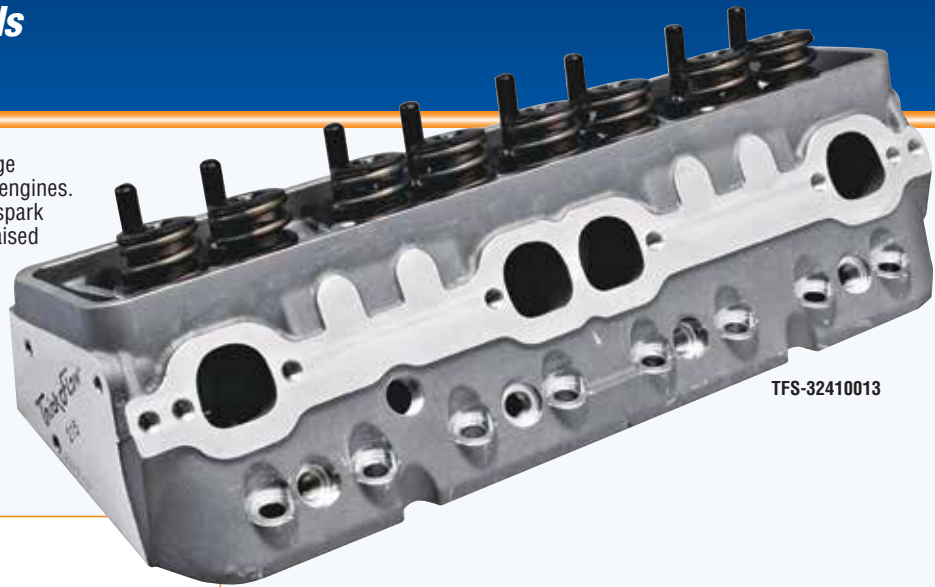

TFS-32410013

Dyno Results Super 23 215

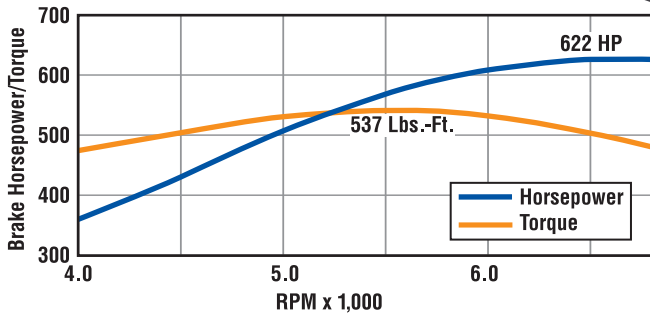

Test Engine: 12:1 compression 406 c.i.d. with Trick Flow Super 23® 215 cylinder heads (TFS-32410007), mechanical roller camshaft (264°/268° duration @ .050"; .630"/.630" lift; 112° lobe separation), Trick Flow 1.5/1.6 ratio roller rocker arms (TFS-31400522), Edelbrock Super Victor intake manifold, Hooker Super Competition headers with 1½" primaries, open exhaust.

Super 23 215 Heads, Fast As Cast Runners, Assembled

- TFS-32410006 67cc combustion chambers and 1.550" dual valve springs (420 lbs./in.), 215cc intake runners
- TFS-3241T006 67cc combustion chambers, 1.550" dual valve springs (420 lbs./in.), and titanium retainers, 215cc intake runners
- TFS-32410007 67cc combustion chambers and 1.550" dual valve springs (460 lbs./in.), 215cc intake runners
- TFS-3241T007 67cc combustion chambers, 1.550" dual valve springs (460 lbs./in.), and titanium retainers, 215cc intake runners
- TFS-32410012 72cc combustion chambers and 1.550" dual valve springs (420 lbs./in.), 215cc intake runners
- TFS-3241T012 72cc combustion chambers, 1.550" dual valve springs (420 lbs./in.), and titanium retainers, 215cc intake runners
- TFS-32410013 72cc combustion chambers and 1.550" dual valve springs (460 lbs./in.), 215cc intake runners
- TFS-3241T013 72cc combustion chambers, 1.550" dual valve springs (460 lbs./in.), and titanium retainers, 215cc intake runners

Airflow Results Super 23 215 with 72cc Chambers

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	66	58
.200"	141	108
.300"	199	147
.400"	244	180
.500"	273	202
.600"	282	214
.700"	287	223

Tests conducted at 28" of water (pressure).
Bore size: 4.155"; exhaust with 1½" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

Specifications

- Material: A356-T61 aluminum
 - Combustion Chamber Volume: 06/07: 67cc standard
12/13: 72cc standard
 - Intake Port Volume: 215cc Fast As Cast
 - Intake Port Location: Stock
 - Intake Port Dimensions: 1.310" x 2.210"
 - Intake Gaskets: Fel-Pro 1206 or 1266
 - Intake Valve Diameter: 2.080" (TFS-32400211)
 - Intake Valve Seat: Ductile iron (TFS-32410271)
 - Exhaust Port Volume: 78cc Fast As Cast
 - Exhaust Port Location: Stock
 - Exhaust Port Dimensions: 1.450" x 1.450" D-shape
 - Exhaust Gaskets: Fel-Pro 1406
 - Exhaust Valve Diameter: 1.600" (TFS-32400212)
 - Exhaust Valve Seat: Ductile iron (TFS-30600274)
 - Valve Angles: 23°
 - Valve Guide Material: Bronze alloy (intake TFS-32400251, exhaust TFS-32400252)
 - Valve Seals: Viton® fluoroelastomer (TFS-51400454)
 - Valve Seat Angles: 45° x multi-angle
 - Valve Spring Pocket Diameter: 1.615"
 - Valve Spring I.D. Locators: 1.550" x .060" (TFS-21400440)
 - Valve Spring Retainers: 10° x 1.550" o.d. chromoly steel (TFS-21400425)
10° x 1.550" o.d. titanium (TFS-214T0520)
 - Valve Stem Locks: 10° machined steel with lash cap recess (TFS-52400444)
 - Valve Springs, Standard: 1.550" o.d. dual spring with damper (TFS-16094-16)
138 lbs. @ 1.950" installed height
430 lbs. @ 1.250" open
420 lbs. per inch rate
.680" maximum valve lift
 - Valve Springs, Optional: 1.550" o.d. dual spring with damper (TFS-16324-16)
215 lbs. @ 1.950" installed height
550 lbs. @ 1.270" open
460 lbs. per inch rate
.680" maximum valve lift
 - Guideplates: 5/16" (TFS-30400623-8)
 - Rocker Arm Studs: 7/16" (TFS-51400614)
 - Rocker Arms: TFS-31400520 (1.5 ratio, 7/16" studs)
TFS-31400521 (1.6 ratio, 7/16" studs)
 - Minimum Bore Diameter: 4.000"
 - Cylinder Head Bolts: TFS-92000
 - Head Gaskets: TFS-30494200-040
 - Pushrod Length: Longer than stock required
 - Spark Plugs: Autolite 3922
- NOTE: Must use head gaskets with 4.155" or larger bore diameter.
Viton® is a registered trademark of DuPont Performance Elastomers.



Super 23[®] 230 Cylinder Heads for Small Block Chevrolet



TFS-3241T001-C03

Trick Flow's Super 23 230 cylinder heads represent the best value in small block Chevy racing technology. That's because they are the closest thing you can get to 18° cylinder head performance in a 23° design.

Super 23 230 heads are designed for 400 cubic inch and larger engines and use standard small block valvetrain parts and headers. Highlights include angled spark plugs, extra-thick decks and walls for porting, and raised valve cover rails.

You can get your Super 23 230 heads in two flavors: CNC Street Ported and CNC Competition Ported. Heads with CNC Street Ported runners feature fully CNC-machined runners and combustion chambers with a standard resolution surface finish for significant performance gains over regular cast heads.


Super 23 230 heads with CNC Competition Ported runners have CNC-profiled combustion chambers and runners with a premium high resolution surface finish for maximum flow and performance.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	70cc CNC-profiled
Intake Port Volume:	C00: 230cc CNC Street Ported C03: 230cc CNC Competition Ported
Intake Port Location:	Stock
Intake Port Dimensions:	1.300" x 2.230"
Intake Gaskets:	Fel-Pro 1206 or 1266
Intake Valve Diameter:	2.080" (TFS-32400211)
Intake Valve Seat:	Ductile iron (TFS-32410271)
Exhaust Port Volume:	C00: 78cc CNC Street Ported C03: 78cc CNC Competition Ported
Exhaust Port Location:	Stock
Exhaust Port Dimensions:	1.490" x 1.490" D-shape
Exhaust Gaskets:	Fel-Pro 1406
Exhaust Valve Diameter:	1.600" (TFS-32400212)
Exhaust Valve Seat:	Ductile iron (TFS-30600274)
Valve Angles:	23°
Valve Guide Material:	Bronze alloy (intake TFS-32400251, exhaust TFS-32400252)
Valve Seals:	Viton [®] fluoroelastomer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.615"
Valve Spring I.D. Locators:	1.550" x .060" (TFS-21400440)
Valve Spring Retainers:	10° machined steel with lash cap recess (TFS-52400444)
Valve Stem Locks:	10° machined steel with lash cap recess (TFS-52400444)
Valve Springs, Standard:	1.550" o.d. dual spring with damper (TFS-16094-16) 138 lbs. @ 1.950" installed height 430 lbs. @ 1.250" open 420 lbs. per inch rate .680" maximum valve lift
Valve Springs, Optional:	1.550" o.d. dual spring with damper (TFS-16324-16) 215 lbs. @ 1.950" installed height 550 lbs. @ 1.270" open 460 lbs. per inch rate .680" maximum valve lift
Guideplates:	5/16" (TFS-30400623-8)
Rocker Arm Studs:	7/16" (TFS-51400614)
Rocker Arms:	TFS-31500520 (1.5 ratio, 7/16" studs) TFS-31400521 (1.6 ratio, 7/16" studs)
Minimum Bore Diameter:	4.000"
Cylinder Head Bolts:	TFS-92000
Head Gaskets:	TFS-30494200-040
Pushrod Length:	Longer than stock required
Spark Plugs:	Autolite 3922
NOTE:	Must use head gaskets with 4.155" or larger bore diameter.
	Viton [®] is a registered trademark of DuPont Performance Elastomers.

Dyno Results Super 23 230

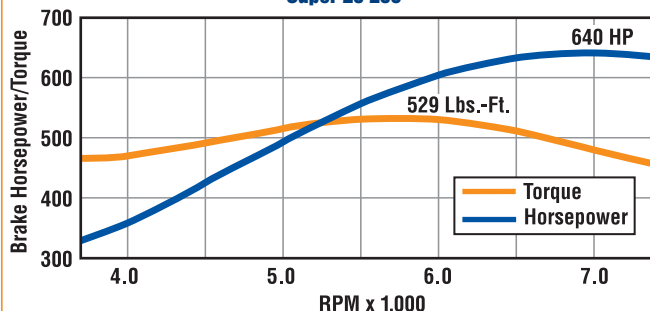

Test Engine: 11.5:1 compression 406 c.i.d. with Trick Flow Super 23[®] 230 cylinder heads (TFS-3241T001-C03), mechanical roller camshaft (266°/270° duration @ .050"; .630"/.630" lift; 112° lobe separation), Trick Flow 1.5/1.6 ratio roller rocker arms (TFS-31400522), Edelbrock Super Victor intake manifold, Hooker Super Competition headers with 1 7/8" primaries, open exhaust.

Super 23 230 Heads, CNC Street Ported Runners, Assembled

TFS-32410002-C00	1.550" dual valve springs (420 lbs./in.), 230cc intake runners
TFS-32410001-C00	1.550" dual valve springs (460 lbs./in.), 230cc intake runners

Super 23 230 Heads, CNC Competition Ported Runners, Assembled

TFS-32410002-C03	1.550" dual valve springs (420 lbs./in.), 230cc intake runners
TFS-3241T002-C03	1.550" dual valve springs (420 lbs./in.) and titanium retainers, 230cc intake runners
TFS-32410001-C03	1.550" dual valve springs (460 lbs./in.), 230cc intake runners
TFS-3241T001-C03	1.550" dual valve springs (460 lbs./in.) and titanium retainers, 230cc intake runners

Airflow Results

Super 23 230 with CNC Competition Ported Runners

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	69	55
.200"	144	112
.300"	213	158
.400"	265	195
.500"	296	220
.600"	305	234
.700"	310	240

Tests conducted at 28" of water (pressure).
Bore size: 4.155"; exhaust with 1 7/8" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."



Compliment your new Super 23[®] heads with a Track Max[®] camshaft for unbeatable, race-winning performance! You can find them on page 20.



Super 23® Top-End Engine Kits for Small Block Chevrolet

Get the most out of your small block Chevy with Trick Flow's top-end engine kits. Trick Flow engineers carefully tune each kit to deliver optimum horsepower and torque—taking the time and guesswork out of designing a winning combination and saving you some hard-earned cash in the process.



The Super 23 top-end kits for small block Chevy are built around a set of dyno-proven, Super 23 195 cylinder heads with 195cc Fast As Cast® intake runners and your choice of 64cc or 72cc CNC-profiled combustion chambers. You also get a Track Max® hydraulic flat tappet or hydraulic roller camshaft, matching lifters (flat tappet cams only), pushrods (flat tappet cams only), roller rocker arms, double roller timing chain, thrust button (roller cams only), cam locking plate, head bolts, pushrod length checker (roller cams only), and a gasket set.

Top end kit part numbers TFS-K314-350-400 and TFS-K314-445-405 include everything listed above, plus Trick Flow's dual plane StreetBurner® intake manifold.



Super 23 Top-End Engine Kits, Flat Tappet Cam


TFS-K314-350-400* 350 HP/400 lbs.-ft., each
TFS-K314-420-395 420 HP/395 lbs.-ft., each
TFS-K314-490-440 490 HP/440 lbs.-ft., each

Super 23 Top-End Engine Kits, Hydraulic Roller Cam


TFS-K314-445-405* 445 HP/405 lbs.-ft., each
TFS-K314-465-450 465 HP/450 lbs.-ft., fits factory non-hydraulic roller cam engine blocks, each
TFS-K314-500-450 500 HP/450 lbs.-ft., fits factory hydraulic roller cam engine blocks, each
TFS-K315-465-450 465 HP/450 lbs.-ft., each

*Includes intake manifold


Super 23 Top-End Engine Kit Dyno Results

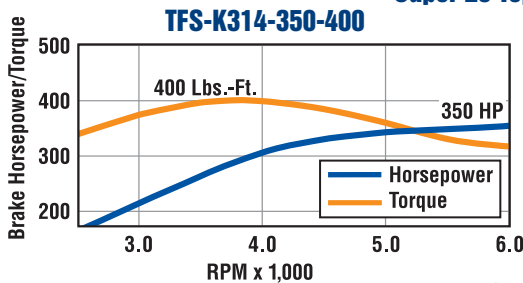


Test Engine: 350 c.i.d. short block with flat top pistons, Trick Flow Super 23® 195 cylinder heads with 64cc CNC-profiled combustion chambers (TFS-30410001-M64), Trick Flow Track Max® hydraulic camshaft (TFS-31401000), Trick Flow StreetBurner® intake manifold (TFS-30400222), 9.5:1 to 10.0:1 compression, and a Trick Flow by Quick Fuel Technology Street Heat™ 650 cfm carburetor.

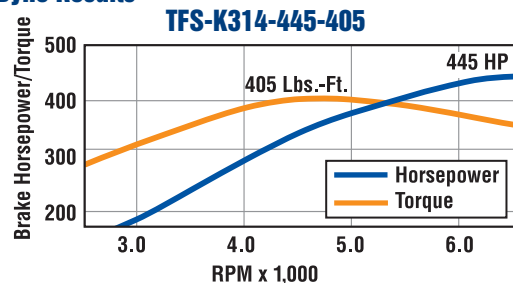


Test Engine: 350 c.i.d. short block with flat top pistons, Trick Flow Super 23® 195 cylinder heads with 64cc CNC-profiled combustion chambers (TFS-30410003-M64), Trick Flow Track Max® hydraulic roller camshaft (TFS-31402002), Trick Flow StreetBurner® intake manifold (TFS-30400222), 10.0:1 compression, and a Trick Flow by Quick Fuel Technology Track Heat® 750 cfm carburetor.

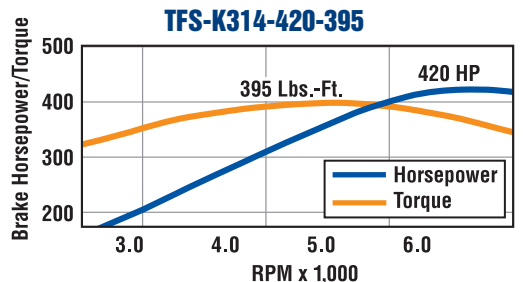


Test Engine: 350 c.i.d. short block with flat top pistons, Trick Flow Super 23® 195 cylinder heads with 64cc CNC-profiled combustion chambers (TFS-30410002-M64), Trick Flow Track Max® hydraulic camshaft (TFS-31401001), 9.5:1 to 10.0:1 compression, an Edelbrock Victor Jr. intake manifold, and a Trick Flow by Quick Fuel Technology Track Heat® 750 cfm carburetor.

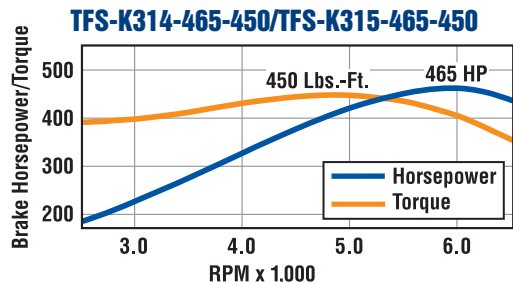

Test Engine: 1987-95 factory roller cam 383 c.i.d. short block with flat top pistons, Trick Flow Super 23® 195 cylinder heads with 72cc CNC-profiled combustion chambers (TFS-30410013-M72), Trick Flow Track Max® hydraulic roller camshaft (TFS-31402001/TFS-31403001), 10.0:1 compression, an Edelbrock Victor Jr. intake manifold, and a Trick Flow by Quick Fuel Technology Track Heat® 750 cfm carburetor.

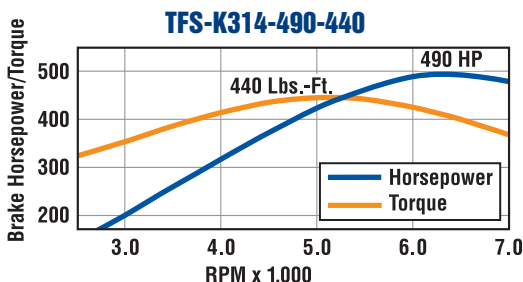

Test Engine: 383 c.i.d. short block with flat top pistons, Trick Flow Super 23® 195 cylinder heads with 72cc CNC-profiled combustion chambers (TFS-30410013-M72), Trick Flow Track Max® hydraulic camshaft (TFS-31401002), 10.0:1 compression, an Edelbrock Victor Jr. intake manifold, and a Trick Flow by Quick Fuel Technology Track Heat® 750 cfm carburetor.

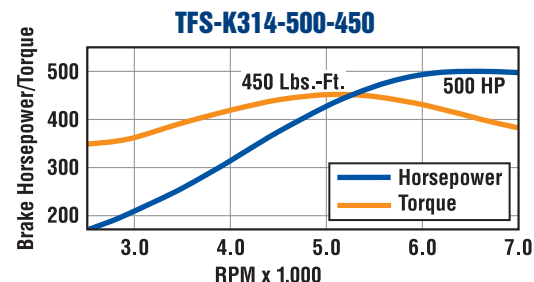

Test Engine: 383 c.i.d. short block with flat top pistons, Trick Flow Super 23® 195 cylinder heads with 72cc CNC-profiled combustion chambers (TFS-30410013-M72), Trick Flow Track Max® hydraulic roller camshaft (TFS-31402002), 10.0:1 compression, an Edelbrock Victor Jr. intake manifold, and a Trick Flow by Quick Fuel Technology Track Heat® 750 cfm carburetor.

Ultra 18[®] 250 Cylinder Head for Small Block Chevrolet



Trick Flow Ultra 18 250 cylinder heads with 18 degree runners make serious horsepower—power ideal for drag and high-rpm circle track racing. Right out of the box, these heads deliver higher airflow numbers than fully prepped 23 degree heads.

Features include Trick Flow's CNC-profiled combustion chambers and CNC Competition Ported runners with a premium high resolution surface finish for maximum flow and performance.

Ultra 18 250 heads accept most current 18 degree intake manifolds, headers, and other components. They require the use of offset shaft-mounted rocker arms and a mechanical roller camshaft with offset intake lifters.

Cylinder heads are available fully assembled or as bare castings. Sold individually.



Specifications

Material:	A-356-T61 aluminum
Combustion Chamber Volume:	56cc CNC-profiled
Intake Port Volume:	250cc CNC Competition Ported
Intake Port Location:	GM 18°
Intake Port Dimensions:	1.350" x 2.200"
Intake Gaskets:	TFS-31800921
Intake Valve Diameter:	2.150" (TFS-31800211)
Intake Valve Seat:	Ductile iron (TFS-31800271)
Exhaust Port Volume:	100cc CNC Competition Ported
Exhaust Port Location:	GM 18°
Exhaust Port Dimensions:	1.760" x 1.460" oval
Exhaust Gaskets:	TFS-31800931
Exhaust Valve Diameter:	1.600" (TFS-31800212)
Exhaust Valve Seat:	Copper bronze alloy (TFS-31800272)
Valve Angles:	18°
Valve Guide Material:	Manganese bronze alloy (TFS-31800251)
Valve Seals:	Viton [®] fluoroelastomer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.660"
Valve Spring I.D. Locators:	TFS-21400440
Valve Spring Retainers:	10" x 1.550" o.d. titanium (TFS-214T0520)
Valve Stem Locks:	10" machined steel with lash cap recess (TFS-52400444)
Valve Springs:	1.560" o.d. dual spring with damper (TFS-16318-16) 240 lbs. @ 2.000" installed height 600 lbs. @ 1.280" open 500 lbs. per inch rate .700" max. valve lift
Rocker Arms:	Shaft-style with .550" offset intake and .220" offset exhaust
Minimum Bore Diameter:	4.155"
Cylinder Head Bolts:	ARP 234-3721
Head Gaskets:	TFS-30494200-040
Pushrod Length:	Varies per application
Spark Plugs:	Autolite 3932
NOTES:	Requires roller lifters with .180" offset intake and no exhaust offset. Requires intake manifold and headers designed for 18° heads.

Viton[®] is a registered trademark of DuPont Performance Elastomers.

Airflow Results Ultra 18 250


Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	73	56
.200"	144	103
.300"	221	150
.400"	280	204
.500"	315	236
.600"	338	258
.700"	343	269

Tests conducted at 28" of water (pressure).
Bore size: 4.155"; exhaust with 2" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

Ultra 18 250 Head, CNC Competition Ported Runners, Assembled

TFS-3181T001-C01 250cc intake runners

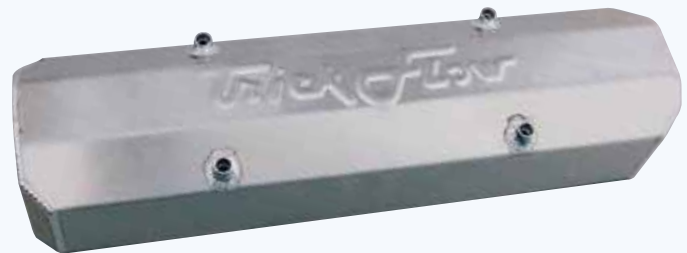

Fabricated Aluminum Valve Covers for Small Block Chevrolet



These good-looking, tall height (3 7/8" overall) fabricated valve covers have an embossed Trick Flow logo and clear roller rockers and stud girdles. They're made from .084" thick aluminum to reduce engine weight and include the necessary fasteners to ensure a correct installation.

TFS-31500804 Valve covers, natural, pair

Trick Flow also has cast aluminum valve covers.
You can find them on page 21.



Chrome Valve Covers for Small Block Chevrolet

Trick Flow chrome plated valve covers provide a great alternative to higher-priced aluminum covers. They're baffled to prevent oil breather blow-by and feature embossed Trick Flow logos and triple chrome plating for a long-lasting shine. New gaskets are included.

TFS-44000 Valve covers, chrome, pair



Rocker Arms • Valve Cover Adapters • Camshafts • Rocker Stud Girdles • Timing Chain Set • Cylinder Head Bolt Kit for Small Block Chevrolet

Roller Rocker Arms for Small Block Chevrolet



TFS-31400510

These aluminum roller rockers are excellent for use with Trick Flow heads. They can also be used on stock and other aftermarket Chevy heads. They feature heat-treated CNC-machined bodies, premium needle-bearing fulcrums, roller tips, and a machined relief for improved valve spring clearance. Trick Flow roller rockers are sold in sets of 16 and come complete with polylocks.

- TFS-31400510 Rocker arms, 1.5 ratio, 3/8" studs, set of 16
- TFS-31400511 Rocker arms, 1.6 ratio, 3/8" studs, set of 16
- TFS-31400512 Rocker arms, 1.5 ratio, 3/8" studs, narrow body, set of 16
- TFS-31400513 Rocker arms, 1.6 ratio, 3/8" studs, narrow body, set of 16
- TFS-31400514 Rocker arms, 1.5/1.6 ratio, 3/8" studs, narrow body, set of 16
- TFS-31400516 Rocker arms, 1.5/1.6 ratio, 3/8" studs, set of 16
- TFS-31400520 Rocker arms, 1.5 ratio, 7/16" studs, set of 16
- TFS-31400521 Rocker arms, 1.6 ratio, 7/16" studs, set of 16
- TFS-31400522 Rocker arms, 1.5/1.6 ratio, 7/16" studs, set of 16



Valve Cover Adapters for Small Block Chevrolet

Trick Flow 1/4" thick steel valve cover adapters allow early-style valve covers to be used with late model Chevy centerbolt heads. Plus, the adapters provide the option of running stud girdles to increase valvetrain stability and improve overall performance. The adapters come with all necessary hardware and .200" thick, rubber steel core gaskets.

NOTE: Requires narrow-body rocker arms (adds .650" to overall height).

- TFS-31500811 Valve cover adapters, pair

Rocker Stud Girdles for Small Block Chevrolet




TFS-30400701

These CNC-machined stud girdles help control valve lift and timing changes due to stud flex, allowing more consistent high-rpm performance. Each stud girdle is anodized blue and comes with high-quality mounting hardware and hardened adjusting nuts. Tall-style valve covers are required.

- TFS-30400700 Rocker stud girdles, 3/8", pair
- TFS-30400701 Rocker stud girdles, 7/16", pair

True Roller Timing Chain Set for Small Block Chevrolet

Billet steel gears and a double roller timing chain combine to make this Trick Flow timing chain set the strongest, most accurate available today. Furthermore, the crank sprocket features multiple keyways to allow the cam to be installed straight-up, retarded, or advanced.



NOTE: Does not fit factory roller camshaft engines.

- TFS-31478500 Timing chain set, each

Cylinder Head Bolt Kit for Small Block Chevrolet



Keep combustion where it belongs! Trick Flow's high-quality cylinder head bolt kits provide consistent clamping force from bolt-to-bolt. The bolts are made from premium quality alloy steel with cold-formed heads and rolled threads. A black oxide finish protects them from wear and corrosion. The kit contains all the bolts you need to install a pair of heads, including hardened washers.

- TFS-92000 Cylinder head bolt kit, hex head, each

Track Max® Camshafts for Small Block Chevrolet



TFS-31401001

Hydraulic Flat Tappet Camshaft and Camshaft/Lifter Kit Specifications

Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.5 Rocker Arms	Lobe Sep.
TFS-31401000 (camshaft only) TFS-K31401000 (kit)	Street; good idle, strong low-end torque, 2,200-5,700 rpm powerband. Small tube headers and low-restriction exhaust recommended. Compression: 9:1 minimum.	212°/214°	.443"/.449"	110°
TFS-31401001 (camshaft only) TFS-K31401001 (kit)	Street/strip; fair idle, strong midrange power, 2,600-6,100 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum.	226°/234°	.480"/.495"	110°
TFS-31401002 (camshaft only) TFS-K31401002 (kit)	Street/strip; rough idle, excellent top-end power, 3,500-6,700 rpm powerband. 3,000-3,500 rpm stall converter. Compression: 10:1 minimum.	246°/254°	.510"/.518"	112°

Hydraulic Roller Camshaft Specifications

Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.5 Rocker Arms	Lobe Sep.
TFS-31402001	Street/strip; fair idle, broad midrange power, 2,800-6,300 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum.	230°/234°	.528"/.539"	110°
TFS-31403001	Street/strip; fair idle, broad midrange power, 2,800-6,300 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum. For use in 1987-95 OEM hydraulic roller cam engines only.	230°/234°	.530"/.540"	110°
TFS-31402002	Race; rough idle, excellent top-end power, 3,500-7,000 rpm powerband. 3,000-3,500 rpm stall converter. Compression: 10:1 minimum.	246°/254°	.555"/.555"	112°



**StreetBurner® Intake Manifold
for Small Block Chevrolet**



Trick Flow's StreetBurner intake manifold for small block Chevrolet engines is designed for street and strip applications that operate in the 1,500-6,500 rpm range. The dual plane, open air design with high-flow individual runners provides significant torque increases in the low- to mid-rpm range. The air space below the plenum separates the runners from the heat of the lifter valley cover to keep the air/fuel mixture cooler for more power. Other features include A319 aluminum construction, integral bosses for nitrous nozzles, and extra material for custom port work. This intake manifold works with all 4150-style carburetors; overall height to the carburetor mounting pad is 5.400".

TFS-30400222 Manifold, each



TFS-31511802

**Cast Aluminum Valve Covers
for Small Block Chevrolet**



Made from durable A319 aluminum, Trick Flow cast aluminum valve covers are much less prone to flex and distortion than stamped steel covers, which helps prevent oil leaks. These small block Chevy covers have a tall height to clear girdles and roller rockers and can be drilled for breathers.

Tall Height Covers, 3¾" Overall Height

TFS-31400902 Valve covers, polished, pair

Pent Roof Covers, 4¾" Overall Height

TFS-31500802 Valve covers, silver, pair

TFS-31511802 Valve covers, black, pair

TFS-3150B802 Valve covers, natural, pair

TFS-25200801 Hardware kit, includes twelve 1/4"-20 x 1.500" studs and 12 flanged nuts, each

**Individual Gaskets
for Small Block
Chevrolet**



TFS-30400941

Trick Flow gaskets are made from high-quality materials with superior fit and finish, designed to deliver trouble-free performance over the long haul. The individual replacement gaskets save you money by letting you purchase just the gaskets you need instead of an entire kit.

TFS-30400941 Valve cover gaskets, molded with steel core, pair

TFS-30400951 Oil pan gasket, one-piece molded, each

TFS-30400921 Intake manifold gaskets, 23° cylinder heads, pair

TFS-31800921 Intake manifold gaskets, 18° cylinder heads, pair

TFS-31800931 Header gaskets, 18° cylinder heads, pair



TFS-3140E915


**Standard Gasket Sets
for Small Block Chevrolet**



These Trick Flow gasket sets are ideal for stock or mild performance engine buildups. They include everything required to seal an engine, including header gaskets, for about the same price as other companies' less complete kits.

TFS-3140E915 Engine gasket set, pre-1987 (except 400), each

TFS-3140E916 Engine gasket set, 400, each

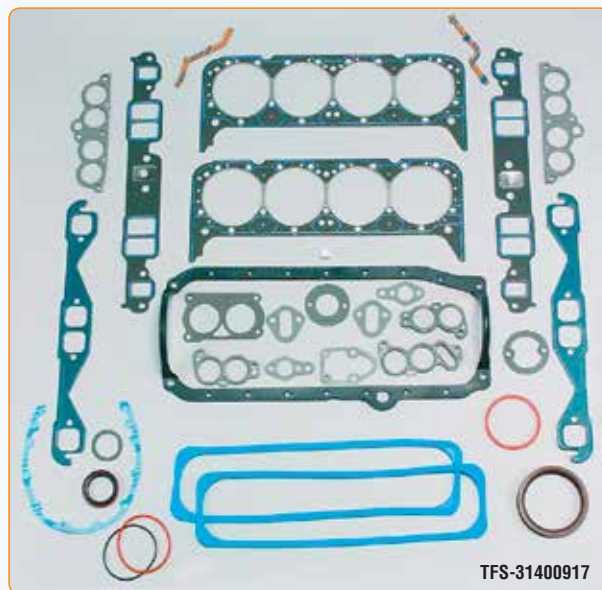

TFS-31400917

**Premium Gasket Sets
for Small Block Chevrolet**



Sets include cylinder head gaskets, intake gaskets, exhaust gaskets, valve cover gaskets, oil pan gaskets, and other gaskets specific to the application.

Engine Gasket Sets

TFS-31400915 Engine gasket set, pre-1987 (except 400), each

TFS-31400916 Engine gasket set, 400, each

TFS-31400917 Engine gasket set, 1987-95 (except LT1), each

TFS-31400911 Engine gasket set, 1992-97 LT1, each

Head Gasket Sets

Sets include head gaskets, intake gaskets, exhaust gaskets, valve cover gaskets, and other gaskets specific to the application.

TFS-31400905 Head gasket set, pre-1987 (except 400), each

TFS-31400906 Head gasket set, 400, each

TFS-31400907 Head gasket set, 1987-95 (except LT1), each

PowerOval® 280 Cylinder Heads for Big Block Chevrolet

Trick Flow PowerOval 280 cylinder heads for big block Chevy are an ideal upgrade from factory cast iron heads for street/strip and marine applications. They feature an oval intake port design that produces excellent low and midrange torque and horsepower, plus more efficient heart-shaped, CNC-profiled combustion chambers, .300" raised exhaust ports, extra-thick decks and walls for porting, and Fast As Cast® runners for near-CNC-ported performance at standard cast head prices. CNC bowl blended valve seat transitions promote high velocity and huge airflow volume and 24 degree valve angles with 4 degree side cants further increase airflow.


Cylinder heads are available fully assembled or as bare castings. Sold individually.



TFS-4131T002

Enhanced Feature!

Dyno Results PowerOval 280

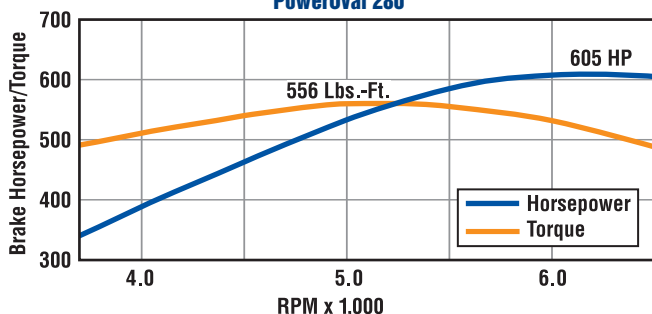

Test Engine: 10.25:1 compression 460 c.i.d. with Trick Flow PowerOval® 280 cylinder heads (TFS-41310002), COMP Cams solid roller camshaft (248°/254° duration @ .050"; .653"/.650" lift; 106° lobe separation), Trick Flow 1.7 ratio roller rocker arms (TFS-41400621), Edelbrock Victor intake manifold, Hooker Super Competition headers with 2" primaries, 3½" dual exhaust with Flowmaster mufflers.

PowerOval 280 Heads, Fast As Cast Runners, Assembled

TFS-41310001-M13	1.550" dual valve springs, 280cc intake runners
TFS-41310002-M13	1.560" dual valve springs, 280cc intake runners
TFS-4131T002-M13	1.560" dual valve springs and titanium retainers, 280cc intake runners
TFS-4131T003-M13	1.640" dual valve springs and titanium retainers, 280cc intake runners

Airflow Results PowerOval 280

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	74	64
.200"	160	113
.300"	231	146
.400"	275	178
.500"	316	209
.600"	336	240
.700"	347	264

Tests conducted at 28" of water (pressure).
Bore size: 4.250"; exhaust with 2" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

Trick Flow PowerOval® Heads Make 20 More Horsepower Than the Competition!

At Trick Flow, the proof is in the dyno sheet.

As tested on a Chevy 454 (10.25:1 CR, .653"/.650" lift solid roller cam, 850 cfm carburetor and Edelbrock Air-Gap intake), Trick Flow PowerOval 280 Cylinder Heads for Big Block Chevrolet made 601 HP—20 more horsepower than the closest competing head.

That's Horsepower by Design!


Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	113cc CNC-profiled
Intake Port Volume:	280cc Fast As Cast
Intake Port Location:	Stock
Intake Port Dimensions:	1.820" x 2.050" oval
Intake Gaskets:	Fel-Pro 1212
Intake Valve Diameter:	2.190" (TFS-41300211)
Intake Valve Seat:	Ductile iron interlock (TFS-41400271)
Exhaust Port Volume:	129cc Fast As Cast
Exhaust Port Location:	Raised .300" from stock
Exhaust Port Dimensions:	1.650" x 1.800" D-shape
Exhaust Gaskets:	Fel-Pro 1412
Exhaust Valve Diameter:	1.880" (TFS-41300212)
Exhaust Valve Seat:	Ductile iron interlock (TFS-41400272)
Valve Angles:	Intake 24°/4°, exhaust 15°/4°
Valve Guide Material:	Bronze alloy (intake TFS-41400251, exhaust TFS-41400252)
Valve Seals:	Viton® fluoropolymer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.760"
Valve Spring Cups:	1.640" (TFS-41400434)
Valve Spring I.D. Locators:	1.550" (TFS-21400440)
Valve Spring Retainers:	10" x 1.550" o.d. + .050" chromoly steel (TFS-41400423)
	10" x 1.550" o.d. + .050" titanium (TFS-214T0525)
	10" x 1.625" o.d. titanium (TFS-214T0620)
Valve Stem Locks:	10" machined steel with lash cap recess (TFS-52400444)
Valve Springs, Standard:	1.550" o.d. dual spring with damper (TFS-16094-16)
	138 lbs. @ 1.950" installed height
	430 lbs. @ 1.250" open
	420 lbs. per inch rate
	.700" maximum valve lift
Valve Springs, Option 1:	1.560" o.d. dual spring with damper (TFS-16318-16)
	240 lbs. @ 2.000" installed height
	600 lbs. @ 1.280" open
	500 lbs. per inch rate
	.700" maximum valve lift
Valve Springs, Option 2:	1.640" o.d. dual spring with damper (TFS-16414-16)
	250 lbs. @ 2.000" installed height
	800 lbs. @ 1.150" open
	600 lbs. per inch rate
	.850" maximum valve lift
Guideplates:	3/8" (TFS-41400623)
Rocker Arm Studs:	7/16" (intake TFS-41400613, exhaust TFS-41400614)
Rocker Arms:	TFS-41400621 (1.7 ratio, 7/16" studs)
Minimum Bore Diameter:	4.094"
Cylinder Head Bolts:	TFS-92002
Head Gaskets:	TFS-41394375-040
Pushrod Length:	Longer than stock required
Spark Plugs:	Autolite 3924
	Viton® is a registered trademark of DuPont Performance Elastomers.



PowerPort® 320 and 365 Cylinder Heads for Big Block Chevrolet

Big Block Chevrolet

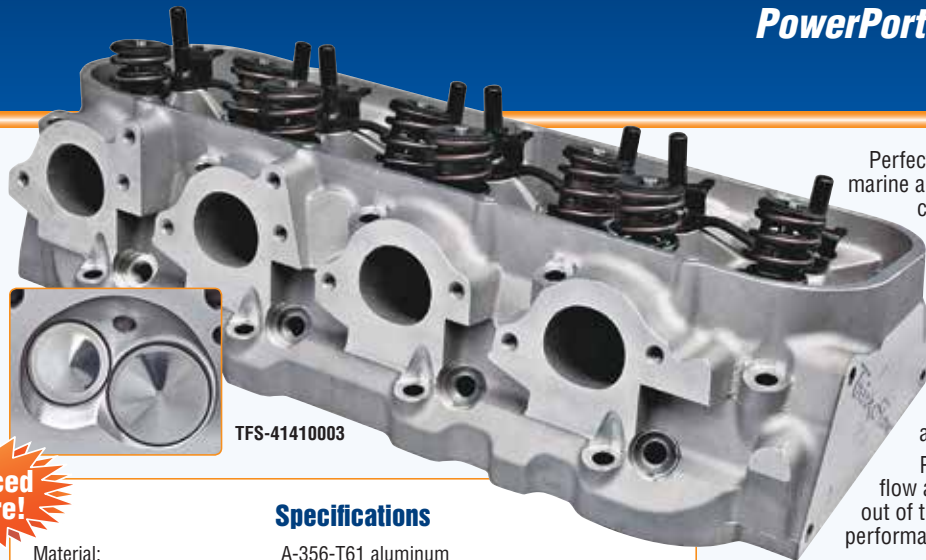

TFS-41410003

Enhanced Feature!

Specifications

Material:	A-356-T61 aluminum
Combustion Chamber Volume:	PowerPort 320: 122cc CNC-profiled PowerPort 365: 119cc CNC-profiled
Intake Port Volume:	PowerPort 320: 320cc Fast As Cast PowerPort 365: 365cc CNC Competition Ported Stock
Intake Port Location:	1.750" x 2.500" rectangular
Intake Port Dimensions:	PowerPort 320: Mr. Gasket 121 PowerPort 365: SCE Gaskets 213105
Intake Gaskets:	PowerPort 320 01/02: 2.250" (TFS-41400210) PowerPort 320 03: 2.300" (TFS-41400211) PowerPort 365: 2.350" (TFS-41400211)
Intake Valve Diameter:	Ductile iron interlock (TFS-41400271)
Intake Valve Seat:	PowerPort 320: 137cc Fast As Cast PowerPort 365: 135cc CNC Competition Ported
Exhaust Port Volume:	Raised .300" from stock 1.770" x 1.930" D-shape
Exhaust Port Location:	Fel-Pro 1412 or TFS-41490931
Exhaust Port Dimensions:	PowerPort 320: 1.880" (TFS-41300212) PowerPort 365: 1.880" (TFS-41400212)
Exhaust Gaskets:	Ductile iron interlock (TFS-41400272)
Exhaust Valve Diameter:	Intake: 24°/4°, exhaust 15°/4°
Exhaust Valve Seat:	PowerPort 320: Bronze alloy (intake TFS-41400251, exhaust TFS-4140252)
Valve Angles:	PowerPort 365: Bronze alloy (TFS-51600251)
Valve Guide Material:	PowerPort 320: Viton® fluorocopolymer (TFS-51400454) PowerPort 365: Viton® fluorocopolymer (TFS-54500455)
Valve Seals:	45° x multi-angle
Valve Seat Angles:	1.760"
Valve Spring Pocket Diameter:	1.640" (TFS-41400434)
Valve Spring Cups:	1.550" (TFS-21400440)
Valve Spring I.D. Locators:	10° x 1.550" o.d. + .050" chromoly steel (TFS-41400423)
Valve Spring Retainers:	PowerPort 320: 10° x 1.550" o.d. + .050" titanium (TFS-214T0525) PowerPort 365: 10° x 1.625" o.d. titanium (TFS-214T0620) PowerPort 320: 10° machined steel with lash cap recess (TFS-52400444) PowerPort 365: 10° steel bead lock with lash cap recess (TFS-54500445)
PowerPort 365:	1.550" o.d. dual spring with damper (TFS-16094-16)
Valve Stem Locks:	138 lbs. @ 1.950" installed height 430 lbs. @ 1.250" open 420 lbs. per inch rate .700" maximum valve lift
Valve Springs	Option 1: 1.560" o.d. dual spring with damper (TFS-16318-16)
PowerPort 320 Standard:	240 lbs. @ 2.000" installed height 600 lbs. @ 1.280" open 500 lbs. per inch rate .700" maximum valve lift
Option 1:	Option 2: 1.640" o.d. dual spring with damper (TFS-16414-16)
Option 2:	250 lbs. @ 2.000" installed height 800 lbs. @ 1.150" open 600 lbs. per inch rate .850" maximum valve lift

Perfect for all high performance street/strip, racing, and marine applications, Trick Flow PowerPort 320 and 365 cylinder heads for big block Chevy deliver exceptional power potential and competition level durability.

Features include rectangular intake runners for strong mid- to high-rpm performance, fully CNC-profiled, heart-shaped combustion chambers, CNC bowl blended valve seat transitions, 24 degree intake valve angles with 4 degree side cuts for additional airflow volume, adjustable guideplates, and premium quality, high-strength aluminum castings.

PowerPort 320 heads with Fast As Cast® runners flow almost as much air as fully CNC-ported heads right out of the box. That means you'll get almost CNC-ported performance for about the same price as regular cast heads.

PowerPort 365 heads are best suited for 500 plus cubic inch extreme performance engines. The heads include top-of-the-line CNC Competition Ported runners with a high resolution finish for maximum airflow and power and are assembled with the highest quality valvetrain components for ultimate endurance in all operating conditions.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Airflow Results PowerPort 365

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	78	63
.200"	150	134
.300"	235	198
.400"	298	246
.500"	345	277
.600"	385	301
.700"	411	318
.800"	418	328
.900"	424	337

Tests conducted at 28" of water (pressure).
Bore size: 4.600"; exhaust with 2" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

PowerPort 320 Heads, Fast As Cast Runners, Assembled

TFS-41410001-M22	2.250" intake valves and 1.550" dual valve springs, 320cc intake runners
TFS-41410002-M22	2.250" intake valves and 1.560" dual valve springs, 320cc intake runners
TFS-41410003-M22	2.300" intake valves and 1.560" dual valve springs, 320cc intake runners
TFS-4141T003-M22	2.300" intake valves, 1.560" dual valve springs, and titanium retainers, 320cc intake runners
TFS-4141T803-M22	2.300" intake valves, 1.640" dual valve springs, and titanium retainers, 320cc intake runners

PowerPort 365 Head, CNC Competition Ported Runners, Assembled

TFS-4141T804-C02	2.350" intake valves, 1.645" triple valve springs, and titanium retainers, 365cc intake runners
------------------	---

Valve Springs, PowerPort 365	1.645" o.d. triple spring (TFS-16948-16) 332 lbs. @ 2.100" installed height 950 lbs. @ 1.200" open 688 lbs. per inch rate .900" maximum valve lift
Guideplates:	3/8" (TFS-41400623)
Rocker Arm Studs:	7/16" (intake TFS-41400613, exhaust TFS-41400614)
Rocker Arms:	TFS-41400621 (1.7 ratio, 7/16" studs)
Minimum Bore Diameter:	4.250"
Cylinder Head Bolts:	TFS-92002
Head Gaskets:	TFS-41394540-040
Pushrod Length:	Longer than stock required
Spark Plugs:	Autolite 3924

Viton® is a registered trademark of DuPont Performance Elastomers.



Big Block Chevrolet



Roller Rocker Arms for Big Block Chevrolet



These aluminum roller rockers are excellent for use with Trick Flow heads. They can be used on most factory Chevy and aftermarket heads, too.

They feature heat-treated CNC-machined bodies, premium needle-bearing fulcrums, roller tips, and a machined relief for improved valve spring clearance. Trick Flow roller rockers are sold in sets of 16 and come complete with polylocks.

TFS-41400621 Rocker arms, 1.7 ratio, 7/16" studs, set of 16

True Roller Timing Chain Set for Big Block Chevrolet

This billet steel timing set for big block Chevrolet is engineered for durability and versatility. The .250" diameter, double-row true roller chain and black oxide-coated crank sprocket are heat-treated for unrivaled strength. The CNC-machined cam gear has nine crank sprocket keyways for zero and +/- 2°, 4°, 6°, or 8° timing adjustments. The timing marks are laser-etched.



TFS-41478510 Timing chain set, each



Rocker Stud Girdles for Big Block Chevrolet



These CNC-machined stud girdles help control valve lift and timing changes due to stud flex, allowing more consistent high-rpm performance. Each stud girdle is anodized blue and comes with high-quality mounting hardware and hardened adjusting nuts. Tall-style valve covers are required.

TFS-41400700 Rocker stud girdles, 7/16", pair



Fabricated Aluminum Valve Covers for Big Block Chevrolet



These good-looking, tall height (3 3/8" overall) fabricated valve covers have an embossed Trick Flow logo and clear roller rockers and stud girdles. They're made from .084" thick aluminum to reduce engine weight and include the necessary fasteners to ensure correct installation.

TFS-41400804 Valve covers, natural, pair



TFS-41400111

R-Series Intake Manifolds for Big Block Chevrolet

The Trick Flow R-Series rectangular port intake manifolds for 500-plus cubic inch big block Chevy engines are designed for maximum power delivery between 3,500 and 8,000 rpm—right where it's needed the most. These single plane intake manifolds feature high-flowing extended runners and raised plenum floors to increase horsepower and torque. Other special features include extra material for custom port work and bosses for nitrous injection. These intake manifolds only fit Holley 4500 Series Dominator carbs. Overall height to the standard deck carburetor mounting pad is 6.543"; the overall height to the tall deck mounting pad is 6.826".

TFS-41400111 Manifold, standard deck height, each
TFS-41400112 Manifold, tall deck height, each



TFS-2145001C



TFS-2141501B

Carburetor Spacers



Give your carburetor a little more space for a noticeable power boost with a premium quality Trick Flow carburetor spacer.

The unique, CNC-ported exit shape on Trick Flow's four-hole carburetor spacers smooth the airflow between the bottom of the carburetor and the intake manifold plenum for more torque and horsepower. Available in two versions, phenolic/composite and billet aluminum, they fit Holley 4150 and other square bore-style carbs.

The open-style spacer for Holley Dominator carbs features a cloverleaf design that increases power in the mid-to-upper rpm range.

The spacers are 1" thick and come complete with mounting studs and gaskets.

TFS-2141501B Billet aluminum spacer, black anodized, square bore carburetors, each
TFS-2141501C Phenolic/composite spacer, square bore carburetors, each
TFS-2145001C Phenolic/composite spacer, Holley Dominator carburetors, each




**Track Max® Hydraulic Roller Camshaft
for Big Block Chevrolet**



Get significant horsepower and torque increases with Trick Flow's Track Max camshaft. It is dyno-proven to produce a wide power curve over the entire rpm range, not just at a particular rpm point or peak. The cam is cut from a premium blank core and checked for proper hardness before being precision ground to exact tolerances.

Camshaft Specifications				
Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.7 Rocker Arms	Lobe Sep.
TFS-41302000	Street/strip; fair idle, good midrange and strong top-end power, 3,000-6,200 rpm powerband, 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum.	236°/242°	.600"/.600"	112°

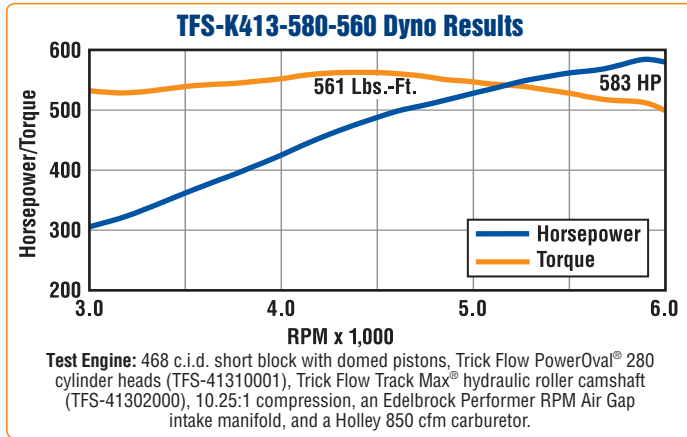

**PowerOval® Top-End Engine Kit
for Big Block Chevrolet**

Take the time and guesswork out of designing a winning engine combination and save hard-earned cash with this Trick Flow PowerOval top-end engine kit. Carefully tuned by Trick Flow engineers to deliver optimum horsepower and torque for your big block Chevrolet, this kit is built around a set of our dyno-proven PowerOval 280 cylinder heads. You also get a Track Max hydraulic roller camshaft, matching lifters, 3/8" pushrods, 1.7 ratio roller rocker arms, billet steel double roller timing chain set, cylinder head bolts, and a gasket set.

TFS-K413-580-560 Top-end engine kit, 580 HP/560 lbs.-ft., each


**Cylinder Head Bolt Kits
for Big Block Chevrolet**



Keep combustion where it belongs! Trick Flow's high-quality cylinder head bolt kits provide consistent clamping force from bolt-to-bolt. The bolts are made from premium quality alloy steel with cold-formed heads and rolled threads. A black oxide finish protects them from wear and corrosion. The kits contain all the bolts you need to install a pair of heads, including hardened washers.



TFS-92001 Cylinder head bolt kit, OE cast iron heads, hex head, each
TFS-92002 Cylinder head bolt kit, aftermarket heads, hex head, each

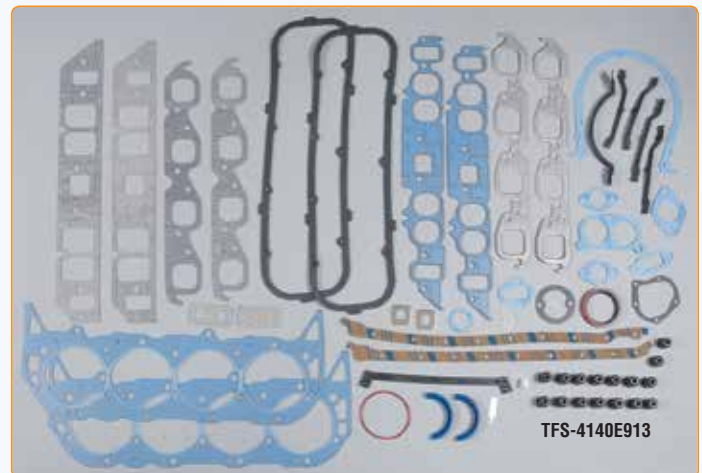

Fender Cover

Trick Flow's fender cover features durable, heavy-gauge vinyl sheeting bonded to thick foam backing to protect your car's fenders from scratches, dings, nicks, and chemicals during service. The cover is blue with an orange Trick Flow logo.



TFS-98000 Fender cover, each

**Standard Gasket Sets
for Big Block Chevrolet**



These Trick Flow gasket sets are ideal for stock or mild performance engine buildups. They include everything required to seal an engine, including header gaskets, for about the same price as other companies' less complete kits.

TFS-4140E912 Engine gasket set, oval port intake, each
TFS-4140E913 Engine gasket set, rectangular port intake, each

Twisted Wedge® 185 and Twisted Wedge® Track Heat® 185 Cylinder Heads for Ford 4.6L/5.4L 2V

Trick Flow Twisted Wedge and Track Heat 185 series cylinder heads are the best aftermarket heads for modular-powered Fords. The secret? Twisted Wedge combustion chambers and intake valves moved on the opposite side of the cam. The result is dramatic increases in mid-lift airflow, piston-to-valve clearance, and valve-to-bore clearance for using higher lift cams and larger valves without altering bore size or flycutting pistons.

Other features include OE PI-style intake inlets, Fast As Cast® runners that deliver near-CNC-ported airflow, CNC-profiled combustion chambers, 3/4" thick decks, patented replaceable cam bearing journals*, and 3/4"-reach spark plugs.

The heads fit all 2V Romeo and Windsor engines and accept all OE-style camshafts, followers, lash adjusters, valve covers, and most OE Ford front covers. Twisted Wedge 185 heads are intended for mildly modified engines; Twisted Wedge Track Heat 185 heads are for engines with power adders and/or high rpm applications.

Cylinder heads are available fully assembled or as bare castings. Sold individually.




TFS-51910001-M38

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	M38: 38cc CNC-profiled M44: 44cc CNC-profiled 185cc Fast As Cast
Intake Port Volume:	185cc Fast As Cast
Intake Port Location:	Stock
Intake Port Dimensions:	1.500" x 1.880" OE Ford PI
Intake Gaskets:	OE Ford PI
Intake Valve Diameter:	M38: 1.840" (TFS-51800211) M44: 1.840" (TFS-51800213)
Intake Valve Seat:	Ductile iron (TFS-51900271)
Exhaust Port Volume:	93cc Fast As Cast
Exhaust Port Location:	Stock
Exhaust Port Dimensions:	1.470" x 1.250" D-shape
Exhaust Gaskets:	OE Ford PI
Exhaust Valve Diameter:	M38: 1.450" (TFS-51800212) M44: 1.450" (TFS-51800214)
Exhaust Valve Seat:	Ductile iron (TFS-51900272)
Valve Angles:	9°
Valve Guide Material:	Trick-Alloy powdered metal (intake TFS-51900251, exhaust TFS-51900252)
Valve Seals:	01/02/03/04: Viton® fluoroelastomer (TFS-51800454) 05/06: Viton® fluoroelastomer (TFS-52900454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.180"
Valve Spring Cups:	05/06: 1.100" (TFS-52900434)
Valve Spring Retainers:	7" x .875" o.d. chromoly steel (TFS-51900423) 05/06: 7" x 1.100" o.d. chromoly steel (TFS-52900423)
Valve Stem Locks:	7" machined steel (TFS-51900444)
Valve Springs:	.940"/1.050" o.d. beehive spring (TFS-16519-16)
Twisted Wedge 185	90 lbs. @ 1.600" installed height 205 lbs. @ 1.020" open 209 lbs. per inch rate .600" maximum valve lift
Valve Springs:	1.000"/1.060" o.d. beehive spring (TFS-16125-16)
Twisted Wedge	125 lbs. @ 1.600" installed height
Track Heat 185, Standard	275 lbs. @ 1.020" open 275 lbs. per inch rate .580" maximum valve lift
Valve Springs:	1.100" dual spring (TFS-16521-16)
Twisted Wedge	150 lbs. @ 1.500" installed height
Track Heat 185, Optional	290 lbs. @ .900" open 233 lbs. per inch rate .650" maximum valve lift
Rocker Arms:	TFS-51800510 (OE-style) TFS-52900510 (Ford GT-style)
Minimum Bore Diameter:	3.552"
Cylinder Head Bolts:	TFS-92008
Head Gaskets:	TFS-5180901L and TFS-5180901R
Spark Plugs:	Motorcraft SP432
NOTE:	Accepts all Romeo and Windsor valve covers plus most OE Ford front covers with 8mm head bolt holes.
	Viton® is a registered trademark of DuPont Performance Elastomers.

*The replaceable cam bearing journals are protected under U.S. patent number 8,231,278.

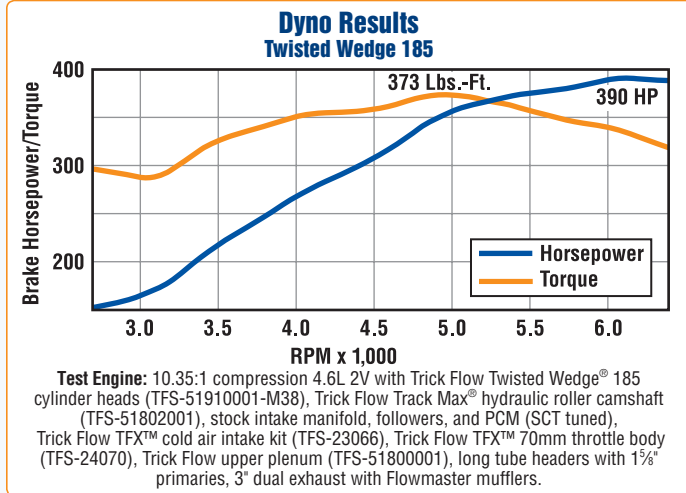

Twisted Wedge 185 Heads, Fast As Cast Runners, Assembled

TFS-51910001-M38	38cc combustion chambers, 90 lb. beehive valve springs, 185cc intake runners
TFS-51910002-M44	44cc combustion chambers, 90 lb. beehive valve springs, 185cc intake runners

Twisted Wedge Track Heat 185 Heads, Fast As Cast Runners, Assembled

TFS-51910003-M38	38cc combustion chambers, 125 lb. beehive valve springs, 185cc intake runners
TFS-51910004-M44	44cc combustion chambers, 125 lb. beehive valve springs, 185cc intake runners
TFS-51910005-M38	38cc combustion chambers, 150 lb. dual valve springs, 185cc intake runners
TFS-51910006-M44	44cc combustion chambers, 150 lb. dual valve springs, 185cc intake runners

Airflow Results Twisted Wedge 185


Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	58	49
.200"	125	101
.300"	175	143
.400"	224	174
.500"	250	179
.600"	252	188

Tests conducted at 28" of water (pressure).
Bore size: 3.562"; exhaust with 1½" pipe.



Ford 4.6L/5.4L

Twisted Wedge® Race 195 Cylinder Heads for Ford 4.6L/5.4L 2V

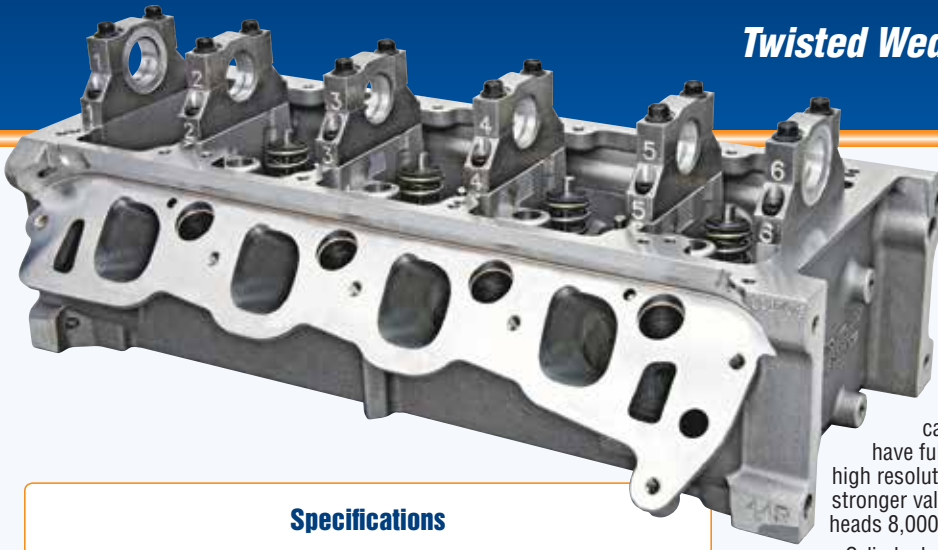

Trick Flow Twisted Wedge Race 195 cylinder heads are perfect for big bore engine builds, superchargers and turbos, high compression E85, big shot nitrous oxide, and other mega-power combinations.

The heads have the same features of the Twisted Wedge 185 series heads—Twisted Wedge combustion chambers, altered intake valve positions, OE PI-style intake inlets, CNC-profiled combustion chambers, 3/4" thick decks, patented replaceable cam bearing journals*, and 3/4"-reach spark plugs—but have fully CNC Competition Ported runners with a premium high resolution surface finish for ultimate performance. Larger, stronger valves and race-duty valvetrain components give these heads 8,000-plus rpm capability.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	44cc CNC-profiled
Intake Port Volume:	195cc CNC Competition Ported
Intake Port Location:	Stock
Intake Port Dimensions:	1.700" x 2.000" OE Ford PI
Intake Gaskets:	OE Ford PI
Intake Valve Diameter:	1.900" (TFS-52900211)
Intake Valve Seat:	Ductile iron (TFS-52900271)
Exhaust Port Volume:	95cc CNC Competition Ported
Exhaust Port Location:	Stock
Exhaust Port Dimensions:	1.470" x 1.250" D-shape
Exhaust Gaskets:	OE Ford PI
Exhaust Valve Diameter:	1.470" (TFS-52900212)
Exhaust Valve Seat:	Ductile iron (TFS-51900272)
Valve Angles:	9°
Valve Guide Material:	Trick-Alloy powdered metal (intake TFS-51900251, exhaust TFS-51900252)
Valve Seals:	Viton® fluoroelastomer (TFS-52900454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.180"
Valve Spring Cups:	1.110" (TFS-52900444)
Valve Spring Retainers:	7° x 1.100" o.d. chromoly steel (TFS-52900424)
Valve Stem Locks:	7° machined steel (TFS-52900450)
Valve Springs:	1.100" dual spring (TFS-16521-16) 150 lbs. @ 1.500" installed height 290 lbs. @ .900" open 233 lbs. per inch rate .650" maximum valve lift TFS-51800510 (OE-style) TFS-52900510 (Ford GT-style)
Rocker Arms:	TFS-51800510 (OE-style) TFS-52900510 (Ford GT-style)
Minimum Bore Diameter:	3.572"
Cylinder Head Bolts:	TFS-92008
Head Gaskets:	TFS-5180902L and TFS-5180902R
Spark Plugs:	Motorcraft SP432
NOTES:	Accepts all Romeo and Windsor valve covers plus most OE Ford front covers with 8mm end bolt holes. Must use head gaskets with a minimum bore diameter of 3.700". Viton® is a registered trademark of DuPont Performance Elastomers.


*The replaceable cam bearing journals are protected under U.S. patent number 8,231,278.



Power Steering Reservoir Bracket for Ford 5.4L 2V Trucks

Use this hefty steel bracket to move your 1997-2010 5.4L Ford truck's power steering reservoir from the cylinder head to the valve cover so you can run Trick Flow Twisted Wedge 185/195 series heads. Includes flange bolts and captive nut clips for easy installation.

TFS-51954PSB Power steering reservoir bracket, each




8mm Timing Cover Bolt and Stud Kit for Ford 4.6L/5.4L 2V

Trick Flow's 8mm timing cover bolt and stud kit allows you to maintain factory accessory mounting when using our Twisted Wedge 185/195 series cylinder heads on modular engines originally equipped with 10mm bolts and studs.

TFS-51954TCB Timing cover bolt and stud kit, each



Dyno Results Twisted Wedge Race 195

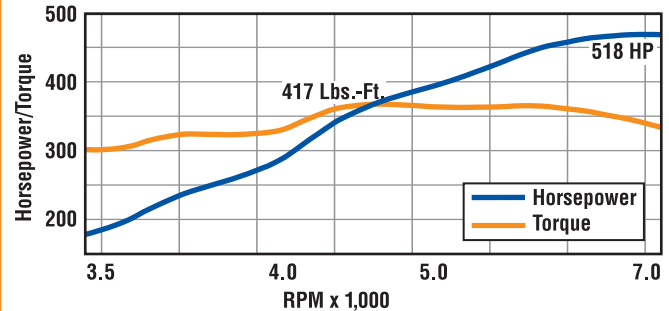

Test Engine: 11.67:1 compression 5.3L Ford Racing Boss engine with 3.700" bore, Twisted Wedge® Race 195 cylinder heads (TFS-52910002-C01), COMP Cams hydraulic roller camshaft (252°/256° duration @ .050"; .625"/.625" lift; 113° lobe separation), Trick Flow Track Heat® intake manifold (TFS-51800002), 90mm mass airflow sensor, PaceSetter headers with 1 5/8" primaries, 3" dual exhaust with Flowmaster mufflers.

Twisted Wedge Race 195 Heads, CNC Competition Ported Runners, Assembled

TFS-52910002-C01 195cc intake runners

Airflow Results Twisted Wedge Race 195

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	61	51
.200"	131	105
.300"	191	152
.400"	234	183
.500"	262	195
.600"	278	199

Tests conducted at 28" of water (pressure).
Bore size: 3.700"; exhaust with 1 1/4" pipe.

Track Max® Hydraulic Roller Camshafts and Valve Spring Upgrade Kits for Ford 4.6L/5.4L 2V

Improve the performance of Ford 4.6L or 5.4L 2Vs with Trick Flow's Track Max camshafts. Choose the smaller cams for increased low- to mid-range torque and horsepower in naturally aspirated, mild street/strip cars. The bigger cams will move the power curve up in the rpm range and are ideal for extreme duty street and race forced induction engines. All cams include new 12mm bolts and washers.

Trick Flow can bundle your cams with the appropriate Trick Flow by PAC Racing valve spring upgrade kit for more performance gains. The first option includes Trick Flow by PAC Racing beehive-style springs (TFS-16519-16) that provide 90 lbs. of seat pressure at 1.570" installed height, 205 lbs. at 1.020" open, and a maximum lift of .600". The second option includes Trick Flow by PAC Racing beehive-style valve springs (TFS-16125-16) with 125 lbs. of seat pressure at 1.600" installed height, 275 lbs. at 1.020" open, and a maximum lift of .580".

The kits come complete with camshafts, valve springs, chromoly retainers, locks, seals, and instructions.



TFS-K51802001

Camshaft Specifications

Part Number	Characteristics	Duration @ .050"	Valve Lift w/OEM Followers	Lobe Sep.
TFS-51802001	Street/strip; fair idle, strong midrange power and torque, 1,500-5,000 rpm powerband. Works with stock PI heads or Trick Flow Twisted Wedge® 185 series heads; tuning recommended for maximum performance. Piston-to-valve clearance measurement recommended. Compression: stock.	228°/230°	.550°/.550"	112°
TFS-51802002	Street/strip; fair idle, strong mid to top-end power, 1,800-6,500 rpm powerband. Works with stock PI heads or Trick Flow Twisted Wedge 185 series heads; tuning recommended for maximum performance. 3.73 or numerically higher gear. Piston-to-valve clearance measurement required. Compression: stock minimum.	234°/234°	.580°/.580"	114°

Camshaft and Valve Spring Upgrade Kit Specifications

Part Number	Characteristics	Duration @ .050"	Valve Lift w/OEM Followers	Lobe Sep.	Valve Springs
TFS-K51802001	Street/strip; fair idle, strong midrange power and torque, 1,500-5,000 rpm powerband. Works best with stock PI heads or Trick Flow Twisted Wedge 185 series heads; tuning recommended for maximum performance. Piston-to-valve clearance measurement recommended. Compression: stock.	228°/230°	.550°/.550"	112°	TFS-16519-16
TFS-K51802002	Street/strip; fair idle, strong mid- to top-end power, 1,800-6,500 rpm powerband. Ideal for mild street/strip engines with power adders up to 5-6 psi. Works best with stock PI heads or Trick Flow Twisted Wedge 185 series heads; tuning recommended for maximum performance. 3.73 or numerically higher gear. Piston-to-valve clearance measurement required. Compression: stock minimum.	234°/234°	.580°/.580"	114°	TFS-16519-16
TFS-K51802003	Race; fair idle, strong top-end power, 1,500-6,500 rpm plus powerband. Works best with Trick Flow Twisted Wedge 185 or 195 series heads; tuning recommended for maximum performance. 3.73 or numerically higher gear. Piston-to-valve clearance measurement recommended. Compression: stock minimum.	228°/230°	.550°/.550"	112°	TFS-16125-16
TFS-K51802004	Race; fair idle, strong top-end power, 6,500 rpm plus powerband. Ideal for extreme duty street/strip and race engines with power adders rated at 15 psi-plus. Works best with Trick Flow Twisted Wedge 185 or 195 series heads; tuning recommended for maximum performance. 3.73 or numerically higher gear. Piston-to-valve clearance measurement required. Compression: stock minimum.	234°/234°	.580°/.580"	114°	TFS-16125-16

Horsepower How-To Series: 4.6L Mustang— Installing Trick Flow Track Max® Camshafts and Twisted Wedge® Cylinder Heads DVD




Horsepower and Trick Flow teamed up to produce a How-To DVD for enthusiasts that covers the technical aspects of upgrading camshafts and cylinder heads to get more performance from Ford's 4.6L 2V engines, using straightforward and easy to understand demonstrations.

Includes camshaft and valvetrain removal and installation, cylinder head disassembly and installation, timing system removal and replacement, and how to properly degree camshafts. Plus detailed tech tips, specs, sample dyno runs, and a huge buyer's guide that contains all the right parts, tools, and accessories you'll need to get the performance gains you want the first time.

TFS-DVD-1 DVD, each



TFS-DVD-1

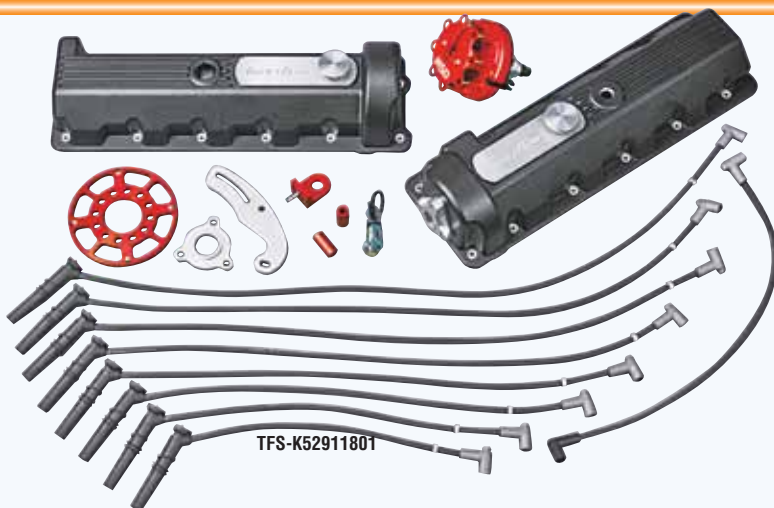

Valve Cover-Mount Ignition Systems for Ford 4.6L/5.4L 2V

Attention mod motor racers! Trick Flow's Valve Cover-Mount Ignition System allows you to take complete and accurate control of your race-prepped motor's ignition timing in applications with custom fuel management systems or carburetor conversions.

Designed specifically for use with Trick Flow's Twisted Wedge® and Twisted Wedge Track Heat® cylinder heads for the 4.6L 2V, these systems feature a valve cover-mounted MSD distributor driven off the driver's side camshaft plus a pair of modified Trick Flow cast aluminum valve covers, a distributor mount and hold-down, a hex drive cam bolt and washer, spark plug wires, and all necessary brackets and mounting hardware.

NOTES:

- For racing use only.
- Can only be used with Trick Flow Twisted Wedge® and Twisted Wedge Track Heat® cylinder heads for Ford 4.6L 2V.
- Requires relocation of the OE power steering reservoir or conversion to manual rack and pinion steering.
- An ignition box compatible with an MSD Pro-Billet distributor is required.

Valve Cover-Mount Ignition Systems with MSD Pro-Billet Crank Trigger Distributors


TFS-K52900801	Valve cover-mount ignition system, Romeo engines, 11-bolt, silver, each
TFS-K52911801	Valve cover-mount ignition system, Romeo engines, 11-bolt, black, each
TFS-K5290B801	Valve cover-mount ignition system, Romeo engines, 11-bolt, natural, each

Valve Cover-Mount Ignition Systems with MSD Pro-Billet Dual Pick-Up Distributors

TFS-K52900803	Valve cover-mount ignition system, Romeo engines, 11-bolt, silver, each
TFS-K52911803	Valve cover-mount ignition system, Romeo engines, 11-bolt, black, each
TFS-K5290B803	Valve cover-mount ignition system, Romeo engines, 11-bolt, natural, each

Valve Cover-Mount Ignition Systems Components

TFS-K5292800	Spark plug wire set, direct fit, includes separators, each
TFS-K5295800	Spark plug wire set, universal fit, includes separators and crimp tool, each
TFS-5292801	Trick Flow/MSD Pro-Billet dual pick-up distributor, each
TFS-5292802	Trick Flow/MSD Pro-Billet crank trigger distributor, each
TFS-5292803	Trigger wheel and bracket kit, each
TFS-529008L1	Modified Trick Flow valve cover with distributor mount, left side only, Romeo engines, 11-bolt, silver, each
TFS-529118L1	Modified Trick Flow valve cover with distributor mount, left side only, Romeo engines, 11-bolt, black, each
TFS-5290B8L1	Modified Trick Flow valve cover with distributor mount, left side only, Romeo engines, 11-bolt, natural, each

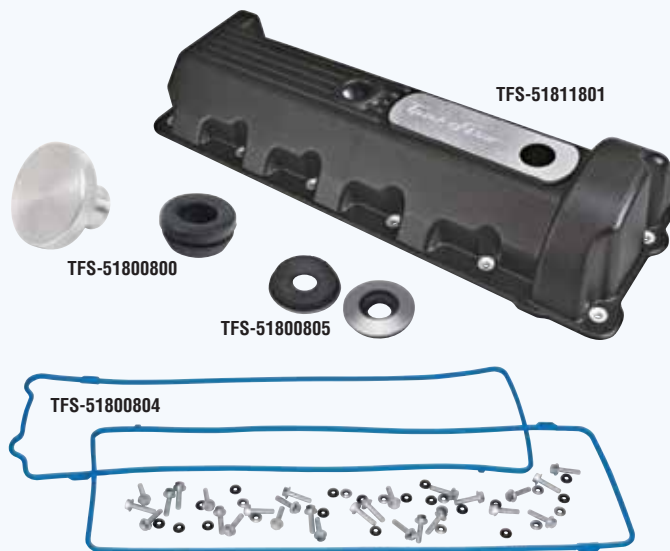

Cast Aluminum Valve Cover Kits and Accessories for Ford 4.6L/5.4L 2V



Trick Flow's lightweight cast aluminum valve covers for Ford 4.6L/5.4L 2V engines are more durable and eliminate the cracking and distortion problems that plague the factory plastic covers. Unique design features include a baffled PCV connection plus baffled and threaded fresh air connections for forced induction applications. The covers come complete with OE-style gaskets, bolts, bolt seals, and two filler caps.

NOTE: Valve covers fit vehicles with left or right side oil fill.

Valve Cover Kits

TFS-51800801	Valve cover kit, Romeo engines, 11-bolt, silver, each
TFS-51811801	Valve cover kit, Romeo engines, 11-bolt, black, each
TFS-5180B801	Valve cover kit, Romeo engines, 11-bolt, natural, each
TFS-51800802	Valve cover kit, Windsor engines, 13-/14-bolt, silver, each
TFS-51811802	Valve cover kit, Windsor engines, 13-/14-bolt, black, each
TFS-5180B802	Valve cover kit, Windsor engines, 13-/14-bolt, natural, each
TFS-51800800	Oil filler cap and grommet, each
TFS-51800804	Valve cover gaskets, Trick Flow valve covers only, pair
TFS-51800805	Valve cover sealing washers, set of 27

PCV Valve Kits

TFS-51800810	Upgrade PCV and large baffle kit, fits Trick Flow valve covers purchased before 6/1/2012 only, each
TFS-51800811	Late model PCV valve conversion kit, fits OEM Ford and Trick Flow valve covers, each

Trick Flow Folding Chair



Take a seat with the champs—Trick Flow Specialties! This comfy, go-with-you-anywhere chair is fitted with strong 600-denier poly-canvas material and equipped with cup holder for your favorite beverage. Relax with the best and when your day is done simply fold up your chair and slip it into the included storage bag.

TFS-P2500 Folding chair, each



Valvetrain Components • Top-End Engine Kits • Cylinder Head Bolt Kit for Ford 4.6L/5.4L



TFS-51800519

Replacement Valvetrain Components for Ford 4.6L/5.4L

Trick Flow's line of replacement valvetrain parts for Ford modular V8s feature OEM quality and durability.

Trick Flow adjustable crankshaft sprockets are machined from solid billet steel for durability and adjust in 2 degree increments. The chain tensioners are manufactured from cast iron to OEM specifications and include tensioners for both the left and right cylinder banks. Camshaft bolts are made from quality Grade 10.9 steel with a black oxide finish and fit all non-PI cams (OE and aftermarket) that require 12mm bolts. Timing chain kits are engineered to keep modular engines running smoothly and include two new high tensile strength steel chains plus hex spacers, powder metal cam sprockets, your choice of adjustable or non-adjustable billet steel crank gears, timing chain arms and guides, and two cast iron tensioner assemblies.

Timing Chain Kits

- TFS-51800519 Timing chain kit, non-adjustable crankshaft gear, Ford 4.6L 2V, each
- TFS-51800520 Timing chain kit, adjustable crankshaft gear, Ford 4.6L 2V, each

Camshaft Gears, Bolts, Crankshaft Gears, and Spacers

- TFS-51800502 Timing gear set with spacers, OEM-style, Ford 4.6L/5.4L 2V, kit
- TFS-51800503 Camshaft gear spacers, Ford 4.6L/5.4L 2V, pair
- TFS-51800505 Crankshaft gears, adjustable, billet steel, Ford 4.6L 2V/4V, set
- TFS-51800508 Camshaft bolts, 12mm, Ford 4.6L 2V/4V, pair
- TFS-51800509 Crankshaft gears, non-adjustable, billet steel, Ford 4.6L 2V, set
- TFS-51800516 Timing gears only, replacement for TFS-51800519, billet steel, pair

Timing Chains, Guides, and Tensioners

- TFS-51800504 Timing chain only, Ford 5.4L 2V, each
- TFS-51800511 Timing chain arms and guides, Ford 5.4L 2V, kit
- TFS-51800512 Timing chain only, Ford 4.6L 2V, each
- TFS-51800513 Timing chain tensioners, cast iron, Ford 4.6L/5.4L 2V, pair
- TFS-51800517 Timing chain arms and guides, Ford 4.6L 2V, kit

Lash Adjusters

- TFS-21400008 Hydraulic lash adjuster, Ford 4.6L/5.4L 2V/4V, each
- TFS-21400008-16 Hydraulic lash adjusters, Ford 4.6L/5.4L 2V/4V, set of 16
- TFS-21400009 Hydraulic lash adjuster, Ford 4.6L/5.4L 3V, each
- TFS-21400009-12 Hydraulic lash adjusters, Ford 4.6L/5.4L 3V, set of 12

Camshaft Followers

- TFS-51800510 Roller follower, OEM-style, Ford 4.6L/5.4L 2V/4V, each
- TFS-51800510-16 Roller followers, OEM-style, Ford 4.6L/5.4L 2V/4V, set of 16
- TFS-51800610 Roller follower, OEM-style, Ford 4.6L/5.4L 3V, each
- TFS-51800610-12 Roller followers, OEM-style, Ford 4.6L/5.4L 3V, set of 12
- TFS-52900510 Roller follower, Ford GT-style upgrade, Ford 4.6L/5.4L 2V/4V, each
- TFS-52900515 Ford GT-style roller follower with low restriction lash adjuster, Ford 4.6L/5.4L 2V/4V, set



TFS-K519-390-375

Twisted Wedge® Top-End Engine Kits for Ford 4.6L 2V



Get the most out of your Ford 4.6L 2V with Trick Flow's Twisted Wedge top-end engine kits. Trick Flow engineers tune each kit to deliver optimum horsepower and torque—taking the time and guesswork out of designing a winning combination and saving you some hard-earned cash in the process.


The Twisted Wedge top-end kits are built around a set of our dyno-proven Twisted Wedge® 185 cylinder heads with 90 lb. valve springs. The Twisted Wedge Track Heat® top-end kits feature our race-winning Twisted Wedge Track Heat 185 cylinder heads with 125 lb. valve springs. With each kit, you get your choice of 38cc or 44cc CNC-profiled combustion chambers plus a Track Max® hydraulic roller camshaft set (TFS-51802001), matching followers, lash adjusters, timing chains, valve spring compressor tool, and intake and head gasket kit.

Twisted Wedge 185 Top-End Engine Kits

- TFS-K519-380-375 380 HP/375 lbs.-ft., 44cc combustion chambers, each
- TFS-K519-390-375 390 HP/375 lbs.-ft., 38cc combustion chambers, each

Twisted Wedge Track Heat 185 Top-End Engine Kits


- TFS-K520-380-375 380 HP/375 lbs.-ft., 44cc combustion chambers, each
- TFS-K520-390-375 390 HP/375 lbs.-ft., 38cc combustion chambers, each

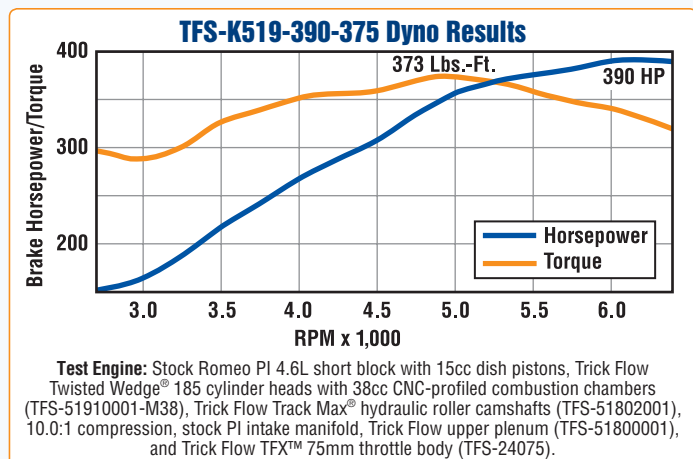

Cylinder Head Bolt Kit for Ford 4.6L 2V/4V



Keep combustion where it belongs! Trick Flow's high-quality cylinder head bolt kits provide consistent clamping force from bolt-to-bolt. The bolts are made from premium quality alloy steel with cold-formed heads and rolled threads. The kit contains all the bolts you need to install a pair of heads, including hardened washers.



TFS-92008

Cylinder head bolt kit, torque-to-yield, each



Track Max® Valve Spring and Valve Spring Upgrade Kits for Ford 4.6L/5.4L 2V

Trick Flow's Track Max Twisted Wedge® valve spring upgrade kit is perfect for mildly modified Ford modular engines. The kit includes .940"/1.050" o.d. beehive valve springs with a 209 lb. spring rate (90 lbs. seat pressure at 1.600" installed height) and maximum lift rating of .600", plus chromoly retainers, locks, seals, and instructions.

The Track Max Twisted Wedge Track Heat® spring upgrade kit is recommended for engines with power adders and/or other high rpm applications. It includes 1.000"/1.600", 275 lb. beehive springs (125 lbs. seat pressure at 1.600" installed height) with a maximum lift rating of .580" and chromoly retainers, locks, seals, and instructions.

The Track Max Twisted Wedge Race spring upgrade kit is designed for extreme performance applications—"big bore" builds, superchargers and turbos, high compression E85, big shot nitrous oxide, and other high power combinations. With this kit you receive sixteen 1.100" diameter dual valve springs with a 233 lb. spring rate (150 lbs. seat pressure at 1.500" installed height) for use with cams up to .650" valve lift, chromoly retainers, locks, seals, and instructions.

TFS-2500500 Twisted Wedge valve spring upgrade kit, fits one pair of OEM Ford 4.6L/5.4L 2V cylinder heads, each

TFS-2500525 Twisted Wedge Track Heat valve spring upgrade kit, fits one pair of OEM Ford 4.6L/5.4L 2V cylinder heads, each

TFS-2500526 Twisted Wedge Race valve spring upgrade kit, fits one pair of modified OEM Ford 4.6L/5.4L 2V or upgrades Trick Flow Twisted Wedge 185 cylinder heads to Twisted Wedge Track Heat 185 specifications, each



Cylinder Head and Intake Gaskets for Ford 4.6L/5.4L 2V and 5.0L 4V

Trick Flow premium quality gaskets to complement Trick Flow cylinder heads and intakes. The gaskets are constructed from the highest quality materials for superior sealing under extreme pressure and heat.

TFS-5180921 Intake gaskets, PI-style, aluminum intake manifolds only, Ford 4.6L/5.4L 2V, pair

TFS-5180922 Intake gaskets, PI-style, aluminum or OE composite intake manifolds, Ford 4.6L/5.4L 2V, pair

TFS-5180901L MLS head gasket, Ford 4.6L/5.4L 2V, 3.630" bore, left, each

TFS-5180901R MLS head gasket, Ford 4.6L/5.4L 2V, 3.630" bore, right, each

Valve Spring Compressor for Ford 4.6L/5.4L 2V/4V

If you work on Ford modular engines, then you need Trick Flow's valve spring compressor. A must for servicing valve springs, retainers, camshafts, and valve seals, this specially made tool can remove the valve springs with the camshafts in the heads—even while they're on the engine.

TFS-90518 Valve spring compressor, Ford 4.6L/5.4L 2V/4V, each



Cam Degree Supplement Kit and Accessories for Ford 4.6L/5.4L 2V/4V

Trick Flow's cam degree kit is perfect for accurately degreeing a camshaft when an engine is mounted on a stand.

However, the kit is a little tricky to use when the engine is in a car. That's why Trick Flow has engineered this cam degree supplement kit. The kit contains components to make degreeing the cam in a vehicle easier: a steel plate for the magnetic base, an allen key, adjustable set-up lash adjuster, and an extension for the dial indicator. This kit must be used with the TFS-90000 cam degree kit (page 51).

TFS-90100 Cam degree supplement kit, each
 TFS-90100-BASE Steel plate for magnetic base indicators, each
 TFS-90100-BODY Adjustable set-up lash adjuster, each
 TFS-90100-EXT Dial indicator extension; 4" long, 4-48 male threads, each



Valve Spring Change Accessory Kit

Originally engineered just for valve spring replacement on Ford 4.6L/5.4L 2V and 4V modular engines, Trick Flow's valve spring change accessory kit now works on all engines. The accessory kit includes a valve seal installer, magnetic pen, and an extended air hose adapter for putting air into the cylinder to keep the valves closed during service.

TFS-90520 Valve spring change accessory kit, universal, each


Trick Flow EFI Programmer for 1999-2004 4.6L 2V Ford Mustang GT

Trick Flow helped turn 1999-2004 4.6L 2V Mustang GT pony cars into thoroughbreds with dyno-proven Track Max® camshafts, TFX™ cold air intake kits, and Twisted Wedge® top-end engine kits. The Trick Flow EFI programmer completes the lineup by using the latest Flash technology to give you total control over shift points, DTCs, rev and speed limiters, idle rpm, and much more. It comes pre-programmed with custom tunes for use with all of Trick Flow's 4.6L 2V components—just pick the tune that matches your upgrades and the EFI programmer automatically optimizes your car's performance. Add an upgrade? Just change tunes!

TFS-88000 EFI programmer, each



EFI Manifolds • EFI Fuel Rails • Upper Plenums • Intake Combos for Ford 4.6L 2V

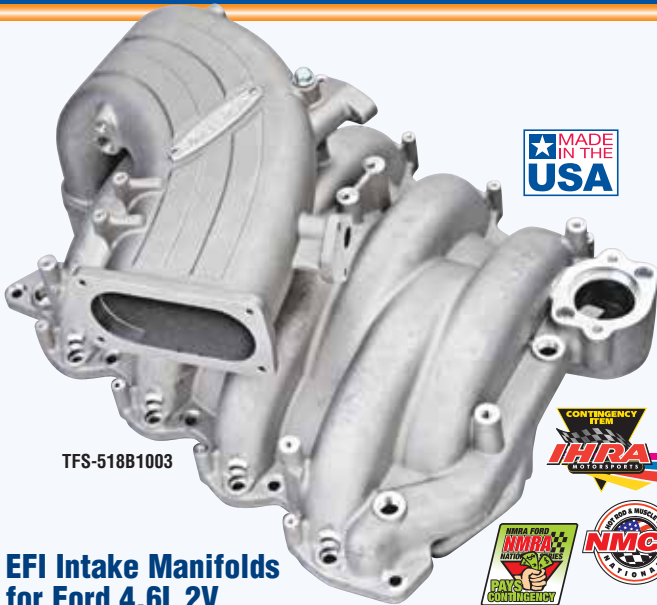

TFS-518B1003



EFI Intake Manifolds for Ford 4.6L 2V

Add some ponies to your 4.6L 2V Mustang with a high performance Trick Flow EFI intake manifold. Trick Flow's revolutionary intakes reward you with big increases in performance over more expensive manifolds!

StreetBurner intake manifolds are designed for mildly modified engines and feature small, 13.300" long small cross section runners to improve performance from 2,500 to 7,000 rpm. Track Heat intakes are recommended for hot street and track-ready vehicles and feature shorter, 11.000" long large cross section runners to build power in the 3,500 to 8,000 plus rpm operating range.

Other power-building characteristics include symmetrical high-velocity intake ports and throttle body inlets, which work together to substantially increase airflow and distribute it evenly to the cylinders. Plus, the intakes are made from durable A319 aluminum so they're safe to use with nitrous oxide. And don't worry about hood clearance—these intakes are a direct bolt-on replacement for stock and will fit under the hood of all 1999-2004 Mustangs.

The upper and lower intake manifolds are also available separately.

NOTES:

- Works with stock and aftermarket fuel rails.
- Will work on 1996-98 Ford 4.6L 2V with modifications.

StreetBurner® Intake Manifold Kits

- TFS-51800000 StreetBurner manifold kit, 75mm throttle body inlet, silver, each
- TFS-51811000 StreetBurner manifold kit, 75mm throttle body inlet, black, each
- TFS-518B0000 StreetBurner manifold kit, 75mm throttle body inlet, natural, each

Track Heat® Intake Manifold Kits

- TFS-51800002 Track Heat manifold kit, 75mm throttle body inlet, silver, each
- TFS-51811002 Track Heat manifold kit, 75mm throttle body inlet, black, each
- TFS-518B0002 Track Heat manifold kit, 75mm throttle body inlet, natural, each
- TFS-51800003 Track Heat manifold kit, dual 57mm throttle body inlet, silver, each
- TFS-51811003 Track Heat manifold kit, dual 57mm throttle body inlet, black, each
- TFS-518B1003 Track Heat manifold kit, dual 57mm throttle body inlet, natural, each

TFX™ EFI Fuel Rails

- TFS-5188000R EFI fuel rails, 1999-2004 4.6L 2V, pair

High-Flow Upper Plenums for Ford 4.6L 2V



More horsepower starts with more air—as much as 100 cfm of additional air over stock with a Trick Flow high-flow upper plenum (CARB E.O. #D-369-5). Made for 1996-2004 4.6L 2V powered Ford cars and trucks, the aluminum plenums have been raised 3/4" to enhance airflow yet still fit under a stock hood. They work with stock sensors, are compatible with throttle bodies up to 75mm, and come in silver, black, and natural finishes.



TFS-518B0001



- TFS-51800001 Plenum, fits 1996-2004 Mustang, silver, each
- TFS-51811001 Plenum, fits 1996-2004 Mustang, black, each
- TFS-518B0001 Plenum, fits 1996-2004 Mustang, natural, each

TFX™ Upper Plenum and Throttle Body Combos

You can get a Trick Flow 4.6L 2V aluminum upper plenum (CARB E.O. #D-369-5) plus one of our TFX throttle bodies (CARB E.O. #D-369-10) in an easy-to-order package. The silver powdercoated upper plenum is raised 3/4" to increase airflow by 100 cfm and the throttle body features die-cast aluminum construction and hand-fitted butterflies. The combo is good for 10-15 additional rear-wheel horsepower on a 1996-2004 4.6L 2V engine. Throttle response is improved, everything fits under a stock hood and works with stock sensors. Includes gaskets and mounting hardware.



TFS-K51824070



- TFS-K51824070 Upper plenum/throttle body combo, 1996-2004 Ford 4.6L 2V, 70mm, silver, each
- TFS-K51824075 Upper plenum/throttle body combo, 1996-2004 Ford 4.6L 2V, 75mm, silver, each



TFS-K51864070

TFX™ Intake Combos for Ford 4.6L 2V


Trick Flow bundled its best air intake components into these TFX intake combos so you can easily upgrade a 1996-2004 4.6L 2V Mustang—no mixing or matching required. You get a Trick Flow cold air intake kit (CARB E.O. #D-369-14), an aluminum upper plenum with silver finish (CARB E.O. #D-369-5), and your choice of a 70mm or 75mm throttle body (CARB E.O. #D-369-10). It's easy to install, it all fits under the stock hood, and works with the computer's factory programming. Intake kit manufactured by K&N for Trick Flow.

- TFS-K51864070 TFX intake combo, 70mm throttle body, each
- TFS-K51864075 TFX intake combo, 75mm throttle body, each



EFI Intake Manifold Specifications for Ford 4.6L 2V			
Manifold	StreetBurner	Track Heat	Track Heat w/Dual Throttle Body Inlets
Engine Size	4.6L 2V	4.6L 2V	4.6L 2V
Runner	Small cross section with 13.300" runner	Large cross section with 11.000" runner	Large cross section with 11.000" runner
RPM Range	2,500-7,000	3,500-8,000	3,500-8,000
Throttle Body Inlet	75mm	75mm	Dual 57mm (Bullitt)
Port Size at Head	OE PI 1.700" x 2.000"	OE PI 1.700" x 2.000"	OE PI 1.700" x 2.000"
Port Size at Plenum	1.750" x 1.750"	1.750" x 2.900"	1.750" x 2.900"
Overall Height to Mounting Flange	7.800"	7.800"	8.300"

PowerPort® Cleveland 195 and 225 Cylinder Heads for Ford 351C, 351M/400, and Clevor

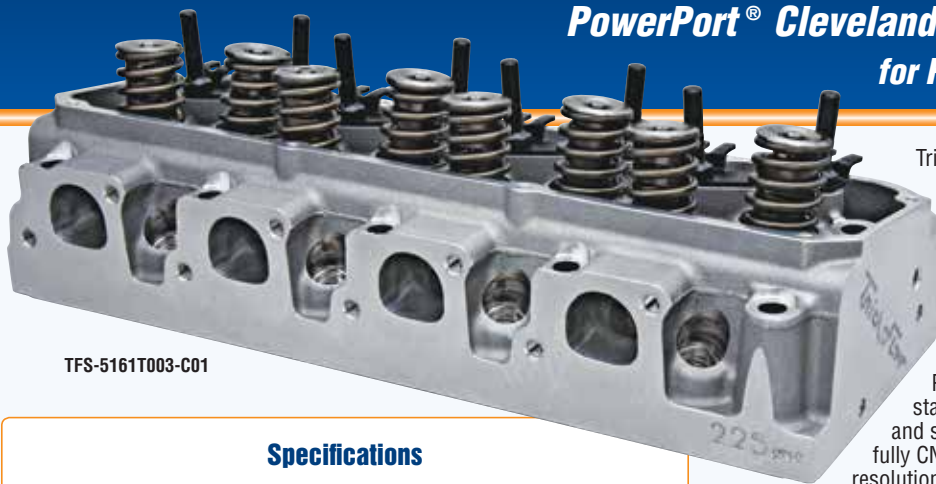

TFS-5161T003-C01

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	C00: 62cc/72cc CNC-profiled C01: 60cc CNC-profiled C11: 72cc CNC-profiled
Intake Port Volume:	C00: 195cc CNC Street Ported C01/C11: 225cc CNC Competition Ported
Intake Port Location:	Stock
Intake Port Dimensions:	C00: 1.470" x 2.100" C01/C11: 1.500" x 2.100"
Intake Gaskets:	Fel-Pro 1240
Intake Valve Diameter:	2.080" (TFS-51600211)
Intake Valve Seat:	Ductile iron (TFS-51700271)
Exhaust Port Volume:	C00: 115cc CNC Street Ported C01/C11: 115cc CNC Competition Ported
Exhaust Port Location:	Raised .100" from OE 2V
Exhaust Port Dimensions:	1.480" x 1.560"
Exhaust Gaskets:	Fel-Pro 1430
Exhaust Valve Diameter:	1.600" (TFS-51600212)
Exhaust Valve Seat:	Ductile iron (TFS-51700272)
Valve Angles:	Intake 9.5° x 4.25°, exhaust 9.5° x 3°
Valve Guide Material:	Bronze alloy (intake TFS-51600251, exhaust TFS-51600252)
Valve Seals:	Viton® fluoroelastomer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.615"
Valve Spring Cups	1.460" (TFS-31400434)
Valve Spring I.D. Locators:	1.550" (TFS-21400440)
Valve Spring Retainers:	7° x 1.500" o.d. chromoly steel (TFS-51400423) 10° x 1.550" o.d. chromoly steel (TFS-21400425) 10° x 1.550" o.d. titanium (TFS-214T0520) 7° machined steel (TFS-51400444)
Valve Stem Locks:	10° machined steel with lash cap recess (TFS-52400444)
Valve Springs, Standard:	1.460" o.d. dual spring with damper (TFS-16534-16) 120 lbs. @ 1.900" installed height 394 lbs. @ 1.175" open 390 lbs. per inch rate .650" maximum valve lift
Valve Springs, Option 1:	1.550" o.d. dual spring with damper (TFS-16094-16) 138 lbs. @ 1.950" installed height 430 lbs. @ 1.250" open 420 lbs. per inch rate .680" maximum valve lift
Valve Springs, Option 2:	1.560" o.d. dual spring with damper (TFS-16318-16) 240 lbs. @ 2.000" installed height 600 lbs. @ 1.280" open 500 lbs. per inch rate .700" maximum valve lift
Guideplates:	5/16" (TFS-51600623) 3/8" (TFS-51600624) 7/16" (TFS-51400614)
Rocker Arm Studs:	TFS-53400621 (1.7 ratio, 7/16" studs)
Rocker Arms:	4.000"
Minimum Bore Diameter:	ARP 154-3604
Cylinder Head Bolts:	Fel-Pro 1013
Head Gaskets:	Longer than stock required
Pushrod Length:	Autolite 3924
Spark Plugs:	

Viton® is a registered trademark of DuPont Performance Elastomers.


Trick Flow PowerPort Cleveland 195 and 225 cylinder heads feature runners based on the OE Ford 2V design. The exhaust runners are raised .100" from the stock location to improve the short turn radius and dramatically improve exhaust flow, and a revised oil return system improves oil drain back and includes provisions for mating with Ford 351W blocks.

PowerPort 195 heads feature CNC Street Ported runners that are CNC-machined with a standard resolution surface finish—perfect for street and strip machines. The PowerPort 225 heads feature fully CNC Competition Ported runners with a premium high resolution surface finish for maximum, all-out performance.

PowerPort Cleveland series heads fit Ford 351C, 351M, and 400 engines out of the box. With minor machining, the heads also fit Ford 302/351W blocks to create a "replica" Boss 302 or a 351 "Clevor" engine.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Dyno Results PowerPort Cleveland 225

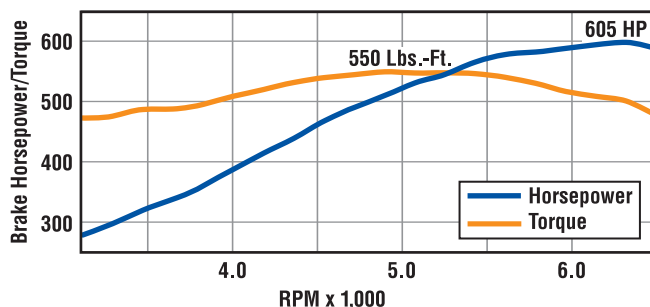

Test Engine: 10.72:1 compression 427 c.i.d. with Trick Flow Flow PowerPort® Cleveland 225 cylinder heads (TFS-5161T004-C01), Trick Flow Track Max® hydraulic roller camshaft (TFS-51403003), Trick Flow 1.73 ratio roller rocker arms (TFS-53400621), Trick Flow Track Heat® intake manifold, Holley Ultra HP 950 cfm carburetor, headers with 1 3/4" primaries, 3" dual exhaust with Flowmaster mufflers.

PowerPort Cleveland 195 Heads, CNC Street Ported Runners, 195cc Intake Runners, Assembled

TFS-51616203-C00	62cc combustion chambers and 1.460" dual valve springs
TFS-51616204-C00	62cc combustion chambers and 1.550" dual valve springs
TFS-5161T625-C00	62cc combustion chambers, 1.560" dual valve springs, and titanium retainers
TFS-51617203-C00	72cc combustion chambers and 1.460" dual valve springs
TFS-51617204-C00	72cc combustion chambers and 1.550" dual valve springs
TFS-5161T725-C00	72cc combustion chambers, 1.560" dual valve springs, and titanium retainers

PowerPort Cleveland 225 Heads, CNC Competition Ported Runners and Titanium Retainers, 225cc Intake Runners, Assembled

TFS-5161T003-C01	60cc combustion chambers, 1.460" dual valve springs
TFS-5161T004-C01	60cc combustion chambers, 1.550" dual valve springs
TFS-5161T005-C01	60cc combustion chambers, 1.560" dual valve springs
TFS-5161T003-C11	72cc combustion chambers, 1.460" dual valve springs
TFS-5161T004-C11	72cc combustion chambers, 1.550" dual valve springs
TFS-5161T005-C11	72cc combustion chambers, 1.560" dual valve springs

Airflow Results PowerPort Cleveland 195

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	68	55
.200"	140	111
.300"	202	155
.400"	254	193
.500"	289	221
.600"	313	236

Tests conducted at 28" of water (pressure).
Bore size: 4.030"; exhaust with 1 1/8" pipe.



Intake Manifolds for Ford 351C and Clevor

EFI Intake Manifold Kits for Ford 351C and Clevor

Trick Flow aluminum EFI intake manifold kits for Ford 351C and 351 Windsor-based Clevor-style engines are computer-modeled and tested to deliver excellent air/fuel distribution and velocity for increased horsepower and torque.

The runner lengths and cross-sectional taper of the R-Series intakes are tuned for street/strip engines that operate in the 2,500 to 7,250 rpm range. Box-R-Series intakes feature a large plenum/short runner design that maximizes mid-to high-rpm power and torque, making it ideal for supercharged, turbocharged, nitrous, and racing applications that produce power in the 3,000 to 8,000 rpm range. The manifolds will work with all 2V and 4V applications. All 9.200" deck height manifolds fit standard Cleveland engine blocks; 9.500" deck height manifolds fit standard 351W-based engine blocks.

All EFI manifold uppers are available in silver and black powdercoated finishes or natural aluminum for those who prefer a natural look or wish to use a custom finish.

NOTES:

- These EFI manifolds are designed for non-EGR engines.
- Engines will require a calibrated mass air or adjustable fuel injection computer, aftermarket fuel rails, and adjustable fuel pressure regulator to operate properly.

R-Series Intake Manifold Kits

TFS-51600114	R-Series manifold kit, Ford 351C, 9.200" deck height, 75mm throttle body inlet, silver upper, each
TFS-51600115	R-Series manifold kit, Clevor, 9.500" deck height, 75mm throttle body inlet, silver upper, each
TFS-51611114	R-Series manifold kit, Ford 351C, 9.200" deck height, 75mm throttle body inlet, black upper, each
TFS-51611115	R-Series manifold kit, Clevor, 9.500" deck height, 75mm throttle body inlet, black upper, each
TFS-516B0114	R-Series manifold kit, Ford 351C, 9.200" deck height, 75mm throttle body inlet, natural upper, each
TFS-516B0115	R-Series manifold kit, Clevor, 9.500" deck height, 75mm throttle body inlet, natural upper, each
TFS-51600116	R-Series manifold kit, Ford 351C, 9.200" deck height, 90mm throttle body inlet, silver upper, each
TFS-51600117	R-Series manifold kit, Clevor, 9.500" deck height, 90mm throttle body inlet, silver upper, each
TFS-51611116	R-Series manifold kit, Ford 351C, 9.200" deck height, 90mm throttle body inlet, black upper, each
TFS-51611117	R-Series manifold kit, Clevor, 9.500" deck height, 90mm throttle body inlet, black upper, each
TFS-516B0116	R-Series manifold kit, Ford 351C, 9.200" deck height, 90mm throttle body inlet, natural upper, each
TFS-516B0117	R-Series manifold kit, Clevor, 9.500" deck height, 90mm throttle body inlet, natural upper, each

Box-R-Series Intake Manifold Kits

TFS-51600118	Box-R-Series manifold kit, Ford 351C, 9.200" deck height, 90mm throttle body inlet, silver upper, each
TFS-51600119	Box-R-Series manifold kit, Clevor, 9.500" deck height, 90mm throttle body inlet, silver upper, each
TFS-51611118	Box-R-Series manifold kit, Ford 351C, 9.200" deck height, 90mm throttle body inlet, black upper, each
TFS-51611119	Box-R-Series manifold kit, Clevor, 9.500" deck height, 90mm throttle body inlet, black upper, each
TFS-516B0118	Box-R-Series manifold kit, Ford 351C, 9.200" deck height, 90mm throttle body inlet, natural upper, each
TFS-516B0119	Box-R-Series manifold kit, Clevor, 9.500" deck height, 90mm throttle body inlet, natural upper, each

PCV Valve, Grommet, and Filter Kit

TFS-51500810	PCV valve, grommet and filter kit, screen-type filter, each
--------------	---



TFS-51600117

EFI Intake Manifold Specifications for Ford 351C and Clevor

Manifold	R-Series	Box-R-Series
Runner	Large cross-section with 13.300" runner	Large cross-section with 11.000" runner
RPM Range	1,500-5,500/2,500-7,500	2,500-7,500
Throttle Body Inlet	75mm/90mm	90mm
Port Size at Head	2.100" x 1.500"	2.100" x 1.500"
Port Size at Mating Flange	2.380" x 1.380"	2.380" x 1.380"
Overall Height to Upper Manifold Flange	12.250"	13.650"
Overall Height to Lower Manifold Flange	5.960"	5.960"



TFS-51600111



Track Heat® Intake Manifolds for Ford 351C and Clevor

The Track Heat single plane intake manifolds for Ford 351C and Windsor-based Clevor-style engines are designed for street/strip applications that operate in the 3,000-7,000 rpm range. The high-rise, one-piece spider design features high-flowing individual extended runners that provide significant horsepower and torque increases in the mid- to high-rpm range and a raised plenum floor for increased flow velocity and fuel atomization.

Other important features include OE 2V port locations and dimensions, A319 aluminum construction, integral bosses for nitrous or fuel injection nozzles, extra material for custom port work, and a Holley 4150-style carburetor mounting pad. Plus, the manifolds will work with all 2V and 4V applications. Overall height to the carburetor mounting pad for TFS-51600111 is 6.250". Overall mounting pad heights for TFS-51600112 and TFS-51600113 is 6.625".

TFS-51600111	Manifold, Ford 351C, 9.200" deck height, factory Cleveland engine blocks, each
TFS-51600112	Manifold, Ford Clevor, 9.500" deck height, factory Windsor engine blocks, each
TFS-51600113	Manifold, Ford Clevor, 9.200" deck height, aftermarket Windsor engine blocks, each
TFS-5161NTBK-92	Manifold bolt kit, fits 9.200" and 9.500" deck height blocks, each

**Valve Covers • Rocker Arms • Rocker Stud Girdles • Pistons • Throttle Cable Brackets
• EFI Fuel Rails • Coolant Crossover for Ford 351C, 351M/400, and Clever**



TFS-51600802


Cast Aluminum Valve Covers for Ford 351C, 351M/400, and Clever

Made from durable A319 aluminum, Trick Flow cast aluminum valve covers are much less prone to flex and distortion than stamped steel covers, which helps prevent oil leaks. These covers have a tall height to clear rocker stud girdles and roller rockers and can be drilled to accept breathers.

- TFS-51600802 Valve covers, silver, pair
- TFS-51611802 Valve covers, black, pair
- TFS-5160B802 Valve covers, natural, pair
- TFS-25200804 Hardware kit, includes twelve 1/4"-20 x 1.500" studs, four 1/4"-20 x 4.500" bolts, sixteen flat washers, and twelve nyloc nuts

Roller Rocker Arms for Ford 351C and 351M/400

These aluminum roller rockers are excellent for use with Trick Flow heads. They can also be used on factory Ford 351C and 351M/400 heads. They feature heat-treated CNC-machined bodies, premium needle-bearing fulcrums, roller tips, and a machined relief for improved valve spring clearance. Trick Flow roller rockers are sold in sets of 16 and come complete with polylocks.



TFS-53400621 Rocker arms, 1.73 ratio, 7/16" stud, set of 16




Rocker Stud Girdles for Ford 351C



These CNC-machined stud girdles help control valve lift and timing changes due to stud flex, allowing for more consistent high-rpm performance. Each stud girdle is anodized blue and comes with high-quality mounting hardware and hardened adjusting nuts. Tall-style valve covers are required.

TFS-51600700 Rocker stud girdles, 7/16", pair

**Throttle Cable Bracket Kits for Ford 351C and Clever
EFI Intake Manifolds**

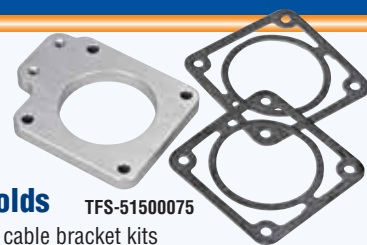

TFS-51500075

Our Trick Flow throttle cable bracket kits provide a place to mount throttle cables on EFI-equipped Ford 351C and Clever engines. They work with 75mm and 90mm EFI manifolds without EGR plates and feature a clear anodized finish. Includes gaskets and mounting hardware.

- TFS-51500075 Throttle cable bracket kit, 75mm manifolds, each
- TFS-51500090 Throttle cable bracket kit, 90mm manifolds, each



TFX™ EFI Fuel Rails for Ford 351C and Clever

These TFX billet fuel rails from Trick Flow were developed to allow owners of high performance Ford 351C and Clever powered vehicles to build custom fuel systems. Includes specially constructed mounting brackets to keep the fuel rails tucked in close to the engine to prevent hood and intake manifold interference.

TFS-5158000R EFI fuel rails, pair



Coolant Crossover Kit for Ford Clever

Trick Flow's coolant crossover kit allows you to mate the cooling passages of our PowerPort® Cleveland cylinder heads with a Ford Windsor block to complete a Clever conversion. The crossover kit replaces the water passage and thermostat housing on a factory Windsor intake manifold with one that redirects the coolant out the front of the cylinder heads and moves the thermostat housing horizontally above the original Windsor location. Includes housing, fittings, hose, hose clamps, and mounting studs.

TFS-51600600 Clever water crossover kit, each

PowerPort® Forged Piston Sets for Ford Clever

Trick Flow's lightweight forged pistons are fully skirted and precision-machined from premium aluminum alloy to fit Ford Windsor engine blocks with Ford 351C-type cylinder heads. They feature oversized valve reliefs, precision-fit wrist pins, and Spirolox retainers.

The pistons are available with a choice of compression ratios. All pistons use ring sets with a 1/16" top rings, 1/16" second rings, and 3.0mm or 3/16" oil control rings (see chart for details). Sold in sets of 8.

NOTE: Compression ratios for part numbers TFS-51604330 and TFS-51604331 are based on 62cc combustion chamber heads; part numbers TFS-51604330-125 and TFS-51604331-125 are based on 72cc combustion chamber heads.



TFS-51604331

Specifications

Part Numbers	Engine Size	Bore	Stroke	Rod	Comp. Height	Comp. Ratio	Pin Dia.	Rings
TFS-51604330	408 (351W)	4.030"	4.000"	6.250"	1.235"	11.9:1	.927"	1/16", 1/16", 3.0mm
TFS-51604330-125	427 (351W)	4.125"	4.000"	6.250"	1.235"	11.0:1	.927"	1/16", 1/16", 3.0mm"
TFS-51604331	408 (351W)	4.030"	4.000"	6.250"	1.235"	9.8:1	.927"	1/16", 1/16", 3/16"
TFS-51604331-125	427 (351W)	4.125"	4.000"	6.250"	1.235"	9.3:1	.927"	1/16", 1/16", 3/16"

Twisted Wedge® 170 Cylinder Heads for Small Block Ford

Trick Flow's legendary Twisted Wedge 170 series cylinder heads are better than ever!

The A356-T61 aluminum castings have been redesigned on the exhaust side to improve strength and water jacket integrity for durability in street and entry level strip applications.

All of the unique features that made Twisted Wedge series heads so dominant in high performance and racing are still here—Twisted Wedge combustion chambers and valve layout, high-flow/high-velocity intake runners, and top-quality valvetrain components—plus CNC-profiled combustion chambers with port-to-valve seat blending (bowl blending) and refined Fast As Cast® runners that deliver near-CNC-ported power and airflow at cast head prices.

Certain Twisted Wedge 170 heads are 50-state emissions-legal under CARB E.O. #D-369-18 for 1996 and earlier Ford 289, 302, and 351W engines.

Cylinder heads are available fully assembled or as bare castings. Sold individually.



Improved Design!

50-State Emissions Legal Available!

TFS-51410004-M61

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	63	53
.200"	141	107
.300"	205	144
.400"	241	171
.500"	257	187
.600"	257	193

Tests conducted at 28" of water (pressure). Bore size: 4.030" 61cc CNC-profiled combustion chambers; exhaust with 1 1/4" pipe.


Twisted Wedge 170 Heads, Emissions Legal, Fast As Cast Runners, Assembled

TFS-51410002-M58	58cc combustion chambers and 1.470" single valve springs, 170cc intake runners
TFS-51410002-M61	61cc combustion chambers and 1.470" single valve springs, 170cc intake runners
TFS-51410004-M58	58cc combustion chambers and 1.460" dual valve springs, 170cc intake runners
TFS-51410004-M61	61cc combustion chambers and 1.460" dual valve springs, 170cc intake runners



Twisted Wedge 170 Heads, Non-Emissions, Fast As Cast Runners, Assembled

TFS-51410010-M58	58cc combustion chambers and 1.460" dual valve springs, 170cc intake runners
TFS-51410010-M61	61cc combustion chambers and 1.460" dual valve springs, 170cc intake runners

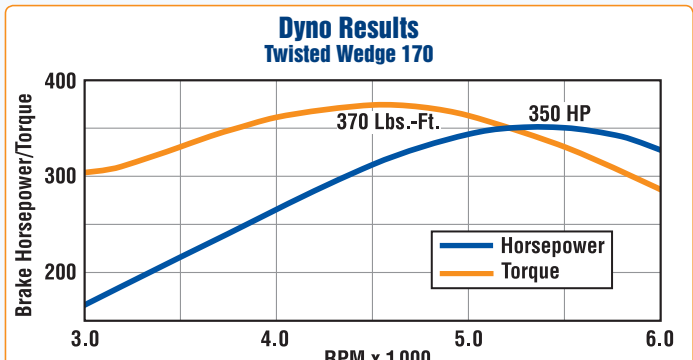

Test Engine: 9.5:1 compression 306 c.i.d. with Trick Flow Twisted Wedge 170 cylinder heads (TFS-51410004-M61), Trick Flow Track Max® hydraulic roller camshaft (TFS-51403001), Trick Flow StreetBurner® EFI intake manifold (TFS-51500001), Trick Flow TFX™ 70mm throttle body (TFS-24070), Trick Flow TFX™ 24 lb./hr. fuel injectors (TFS-89024), Hooker Competition headers with 1 1/4" primaries, 3" dual exhaust with Flowmaster mufflers.

Specifications

- Material: A356-T61 Aluminum
 - Combustion Chamber Volume: M58: 58cc CNC-profiled
M61: 61cc CNC-profiled
 - Intake Port Volume: 170cc Fast As Cast
 - Intake Port Location: Stock
 - Intake Port Dimensions: 1.200" x 2.000"
 - Intake Gaskets: Fel-Pro 1250
 - Intake Valve Diameter: 2.020" (TFS-51400211)
 - Intake Valve Seat: Ductile iron (TFS-51400273)
 - Exhaust Port Volume: 66cc Fast As Cast
 - Exhaust Port Location: Stock
 - Exhaust Port Dimensions: 1.250" x 1.500"
 - Exhaust Gaskets: Fel-Pro 1415
 - Exhaust Valve Diameter: 1.600" (TFS-51400212)
 - Exhaust Valve Seat: Ductile iron (TFS-51400274)
 - Valve Angles: Intake 15°, exhaust 17°
 - Valve Guide Material: Bronze alloy (TFS-51400252)
 - Valve Seals: Viton® fluoroelastomer (TFS-51400454)
 - Valve Seat Angles: 45° x multi-angle
 - Valve Spring Pocket Diameter: 1.615"
 - Valve Spring Cups: 1.480" (TFS-51400434)
 - Valve Spring Retainers: 7" x 1.500" o.d. chromoly steel (TFS-51400423)
10" x 1.500" o.d. chromoly steel (TFS-21400424)
 - Valve Stem Locks: 7" machined steel (TFS-51400444)
10" machined steel with lash cap recess (TFS-52400444)
 - Valve Springs: 1.470" o.d. single spring with damper (TFS-16514-16)
170 Standard 110 lbs. @ 1.800" installed height
305 lbs. @ 1.260" open
360 lbs. per inch rate
.540" maximum valve lift
 - Valve Springs: Optional 1.460" o.d. dual spring with damper (TFS-16315-16)
125 lbs. @ 1.800" installed height
376 lbs. @ 1.180" open
420 lbs. per inch rate
.600" maximum valve lift
 - Guideplates: 5/16" (TFS-51400623)
3/8" (TFS-51400624)
 - Rocker Arm Studs: 02/04: 3/8" (TFS-51400613)
10: 7/16" (TFS-51400614)
 - Rocker Arms: TFS-51400510 (1.6 ratio, 3/8" studs)
TFS-51400511 (1.72 ratio, 3/8" studs)
TFS-51400520 (1.6 ratio, 7/16" studs)
TFS-51400521 (1.72 ratio, 7/16" studs)
 - Minimum Bore Diameter: 4.000"
 - Cylinder Head Bolts: TFS-92005
 - Head Gaskets: TFS-51494030-040 or TFS-51494060-040
 - Pushrod Length: Longer than stock required
 - Spark Plugs: Autolite 3924
- NOTES: Valve cover rail is raised .350" over stock height.
61cc combustion chamber heads work with stock pistons and performance camshafts up to .550" lift.
58cc combustion chamber heads require Twisted Wedge specific pistons for proper piston-to-valve clearance.
- Viton® is a registered trademark of DuPont Performance Elastomers.



Small Block Ford

Twisted Wedge® 11R Cylinder Heads for Small Block Ford



TFS-52515601-C00

Specifications

Material: A-356-T61 aluminum

Combustion Chamber Volume: 5601-C00/C01/C02; T-561-C02/C03:
56cc CNC-profiled
6101-C00: 61cc CNC-profiled
6601-C01/C03; T661-C02/C03:
66cc CNC-profiled

Intake Port Volume: C00: 170cc CNC Street Ported
C01: 190cc CNC Street Ported
C02: 190cc CNC Competition Ported
C03: 205cc CNC Competition Ported

Intake Port Location: Stock

Intake Port Dimensions: C00: 2.000" x 1.200"
C01/C02: 2.100" x 1.280"
C03: 2.250" x 1.400"

Intake Gaskets: C00: Fel-Pro 1250
C01/C02: Fel-Pro 1262
C03: Fel-Pro 1262R or TFS-52400921

Intake Valve Diameter: C00: 2.020" (TFS-52500211)
C01/C02: 2.055" (TFS-52500213)
C03: 2.080" (TFS-52500215)

Intake Valve Seat: Ductile iron (TFS-52500271)

Exhaust Port Volume: C00/C01: 66cc CNC Street Ported
C02/C03: 66cc CNC Competition Ported

Exhaust Port Location: Stock

Exhaust Port Dimensions: 1.250" x 1.480"

Exhaust Gaskets: Fel-Pro 1415 or TFS-51490931

Exhaust Valve Diameter: 1.600" (TFS-52500212)

Exhaust Valve Seat: Ductile iron (TFS-30600274)

Valve Angles: 11° intake, 13° exhaust

Valve Guide Material: Bronze alloy (TFS-52500251)

Valve Seals: Viton® fluoroelastomer (TFS-30600455)

Valve Seat Angles: 45° x multi angle

Valve Spring Pocket Diameter: 1.640"

Valve Spring I.D. Locators: 1.300" (TFS-21400442)

Valve Spring Retainers: 7° x 1.300" o.d. chromoly steel (TFS-21400415)
7° x 1.300" o.d. titanium (TFS-214T0415)

Valve Stem Locks: 7° steel bead lock (TFS-30600444)

Valve Springs: 1.300" o.d. dual spring (TFS-16306-16)
150 lbs. @ 1.800" installed height
438 lbs. @ 1.200" open
448 lbs. per inch rate
.600" max. valve lift

Guideplates: 5/16" (TFS-51400623)
3/8" (TFS-51400624)
7/16" (TFS-51400614)

Rocker Arm Studs: TFS-51400520 (1.6 ratio, 7/16" studs)
TFS-51400521 (1.72 ratio, 7/16" studs)

Minimum Bore Diameter: 4.000"

Cylinder Head Bolts: TFS-92005

Head Gaskets: TFS-51494030-040 or TFS-51494060-040

Pushrod Length: Longer than stock required

Spark Plugs: Autolite 3924

NOTE: Drilled for 1/2" head bolts; 7/16" head bolts require TFS-51400419 reducer

Viton® is a registered trademark of DuPont Performance Elastomers.

Airflow Results

Twisted Wedge® 11R with 205cc CNC Competition Ported Runners

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	71	60
.200"	140	111
.300"	208	150
.400"	261	185
.500"	298	212
.600"	321	227

Tests conducted at 28" of water (pressure). Bore size: 4.030"
66cc CNC-profiled combustion chambers; exhaust with 1¼" pipe.

Something great just got better! Trick Flow has taken its track-proven Twisted Wedge design and, using advanced 3D solid modeling and CAD tools, plus a couple decade's worth of racing experience, has made it even more potent for serious performance enthusiasts and racers.


Trick Flow's new Twisted Wedge 11R cylinder heads feature 11° intake and 13° exhaust valve angles and a restructured combustion chamber arrangement for more airflow and performance potential. The new high velocity, race-inspired runners have been optimized for today's popular bore and stroke combinations. Premium certified materials and components, along with the finest CNC tooling, are used to ensure uncompromising quality and durability, dimensional accuracy, and balanced flow from port-to-port. Fully machined castings increase strength and have a great-looking billet-like appearance.

Twisted Wedge 11R 170 and 190 heads with CNC Street Ported runners are great entry-level CNC heads combining fully CNC-machined runners and combustion chambers with a standard resolution surface finish for significant performance gains. Twisted Wedge 11R 190 and 205 heads with CNC Competition Ported runners feature fully CNC-machined runners and chambers with a premium high resolution finish for ultimate performance.

Twisted Wedge 11R heads are for use on non-emissions engines. The heads are a direct replacement for previous Twisted Wedge heads and work with all Twisted Wedge specific pistons. Cylinder heads are available fully assembled or as bare castings. Sold individually.

Dyno Results

Twisted Wedge 11R with 205cc CNC Competition Ported Runners

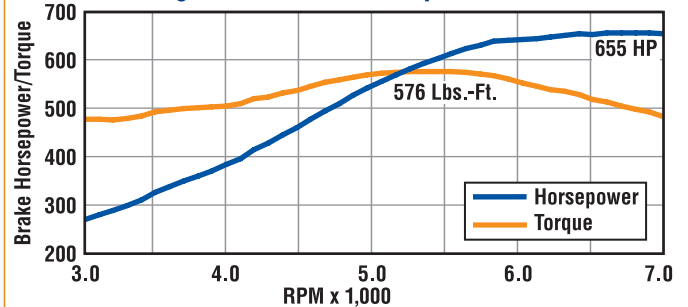

Test Engine: 11.59:1 compression 427 c.i.d. with Trick Flow Twisted Wedge® 11R 205 cylinder heads (TFS-52615601-C03), Trick Flow Track Max® hydraulic roller camshaft (TFS-51403005), 1.72 ratio roller rocker arms, Edelbrock Super Victor intake manifold, Hooker headers with 1½" primaries, 3" dual exhaust with Flowmaster mufflers.

Twisted Wedge 11R 170 Cylinder Heads, CNC Street Ported Runners, Assembled

TFS-52515601-C00 56cc combustion chambers, 170cc intake runners
TFS-52516101-C00 61cc combustion chambers, 170cc intake runners

Twisted Wedge 11R 190 Cylinder Heads, CNC Street Ported Runners, Assembled

TFS-52515601-C01 56cc combustion chambers, 190cc intake runners
TFS-52516601-C01 66cc combustion chambers, 190cc intake runners


Twisted Wedge 11R 190 Cylinder Heads, CNC Competition Ported Runners, Assembled

TFS-52615601-C02 56cc combustion chambers, 190cc intake runners
TFS-5261T561-C02 56cc combustion chambers and titanium retainers, 190cc intake runners
TFS-52616601-C02 66cc combustion chambers, 190cc intake runners
TFS-5261T661-C02 66cc combustion chambers and titanium retainers, 190cc intake runners

Twisted Wedge 11R 205 Cylinder Heads, CNC Competition Ported Runners, Assembled

TFS-52615601-C03 56cc combustion chambers, 205cc intake runners
TFS-5261T561-C03 56cc combustion chambers and titanium retainers, 205cc intake runners
TFS-52616601-C03 66cc combustion chambers, 205cc intake runners
TFS-5261T661-C03 66cc combustion chambers and titanium retainers, 205cc intake runners

Twisted Wedge® Race 206 and 225 Cylinder Heads for Small Block Ford

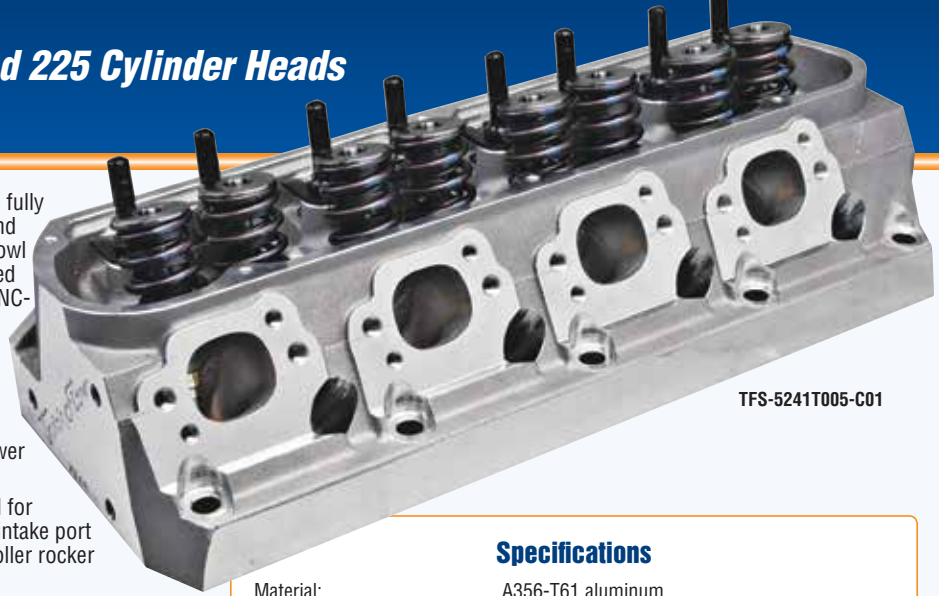

TFS-5241T005-C01


Trick Flow's Twisted Wedge Race 206 heads feature fully CNC-profiled Twisted Wedge combustion chambers and valve arrangement with port-to-valve seat blending (bowl blending), plus .500" raised exhaust runners, and raised valve cover rails. Fast As Cast® runners deliver near-CNC-ported airflow and power for about the same price as cast heads.

The Twisted Wedge Race 225 heads have all of the features of the Race 206 heads but come with top-of-the-line CNC Competition Ported runners with a high resolution surface finish for maximum airflow and power over the entire powerband.

Twisted Wedge Race heads have additional material for porting, thick decks and chamber walls for durability, intake port shaping for Fel-Pro #1262 gaskets, stud mounts for roller rocker arms, and huge valve spring pockets.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Dyno Results Twisted Wedge Race 225

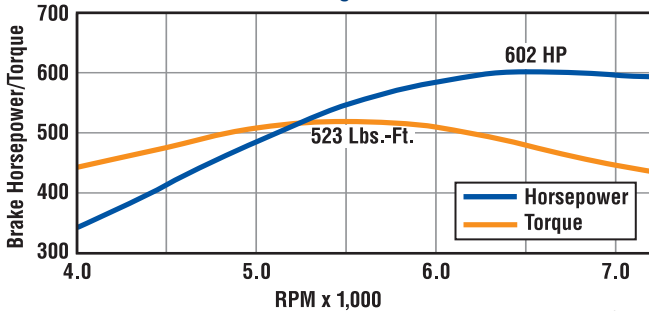

Test Engine: 10.59:1 compression 408 c.i.d. with Trick Flow Twisted Wedge® Race 225 cylinder heads (TFS-5240T005-C01), COMP Cams Xtreme Energy mechanical roller camshaft (254°/260° duration @.050"; .621"/.627" lift; 110° lobe separation), Trick Flow 1.6 ratio roller rocker arms (TFS-51400520), Edelbrock Super Victor intake manifold, Hooker headers with 1 1/4" primaries, open exhaust.

Twisted Wedge Race 206 Heads, Fast As Cast Runners, Assembled

- TFS-52410003-M61 1.550" dual valve springs, 206cc intake runners
- TFS-52410004-M61 1.550" dual valve springs and O-rings, 206cc intake runners
- TFS-52410005-M61 1.560" dual valve springs, 206cc intake runners
- TFS-5241T005-M61 1.560" dual valve springs and titanium retainers, 206cc intake runners
- TFS-52410006-M61 1.560" dual valve springs and O-rings, 206cc intake runners
- TFS-5241T006-M61 1.560" dual valve springs, O-rings, and titanium retainers, 206cc intake runners
- TFS-5241T805-M61 1.640" dual valve springs and titanium retainers, 206cc intake runners

Twisted Wedge Race 225 Heads, CNC Competition Ported Runners, Assembled

- TFS-52410003-C01 1.550" dual valve springs, 225cc intake runners
- TFS-52410005-C01 1.560" dual valve springs, 225cc intake runners
- TFS-5241T005-C01 1.560" dual valve springs and titanium retainers, 225cc intake runners
- TFS-5241T805-C01 1.640" dual valve springs and titanium retainers, 225cc intake runners

Airflow Results Twisted Wedge Race 225

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	67	59
.200"	141	116
.300"	213	159
.400"	270	205
.500"	308	244
.600"	331	259
.700"	341	271

Tests conducted at 28" of water (pressure).
Bore size: 4.125"; exhaust with 2" pipe.


To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

Specifications

- Material: A356-T61 aluminum
- Combustion Chamber Volume: M61: 61cc CNC-profiled
C01: 65cc CNC-profiled
- Intake Port Volume: M61: 206cc Fast As Cast
C01: 225cc CNC Competition Ported
- Intake Port Location: Stock
- Intake Port Dimensions: M61: 1.375" x 2.125"
C01: 1.375" x 2.240"
- Intake Gaskets: M61: Fel-Pro 1262
C01: Fel-Pro 1262R
- Intake Valve Diameter: 2.080" (TFS-52400217)
- Intake Valve Seat: Tungsten alloy (TFS-52400271)
- Exhaust Port Volume: M61: 92cc Fast As Cast
C01: 100cc CNC Competition Ported
- Exhaust Port Location: Raised .500" from stock
- Exhaust Port Dimensions: 1.510" x 1.660" oval
- Exhaust Gaskets: Fel-Pro 1427
- Exhaust Valve Diameter: 1.600" (TFS-52400212)
- Exhaust Valve Seat: Copper bronze alloy (TFS-52400272)
- Valve Angles: Intake 15°, exhaust 17°
- Valve Guide Material: Bronze alloy (TFS-52400252)
- Valve Seals: Viton® fluoroelastomer (TFS-51400454)
- Valve Seat Angles: 45° x multi-angle
- Valve Spring Pocket Diameter: 1.760"
- Valve Spring I.D. Locators: 1.550" (TFS-21400440), 1.640" (TFS-21400441)
- Valve Spring Retainers: 10" x 1.550" o.d. chromoly steel (TFS-21400425)
10" x 1.550" o.d. titanium (TFS-214T0520)
- Valve Stem Locks: 10" machined steel with lash cap recess (TFS-52400444)
- Valve Springs, Standard: 1.550" o.d. dual spring with damper (TFS-16094-16)
138 lbs. @ 1.950" installed height
430 lbs. @ 1.250" open
420 lbs. per inch rate
.680" maximum valve lift
- Valve Springs, Option 1: 1.560" o.d. dual spring with damper (TFS-16318-16)
240 lbs. @ 2.000" installed height
600 lbs. @ 1.280" open
500 lbs. per inch rate
.720" maximum valve lift
- Valve Springs, Option 2: 1.640" o.d. dual spring with damper (TFS-16414-16)
250 lbs. @ 2.000" installed height
800 lbs. @ 1.150" open
600 lbs. per inch rate
.850" maximum valve lift
- Guideplates: 5/16" (TFS-52400622), 3/8" (TFS-52400624)
- Rocker Arm Studs: 7/16" (TFS-51400614)
- Rocker Arms: TFS-51400520 (1.6 ratio, 7/16" studs)
TFS-51400521 (1.72 ratio, 7/16" studs)
- Minimum Bore Diameter: 4.000"
- Cylinder Head Bolts: TFS-92005
- Head Gaskets: TFS-51494060-040, TFS-51494080-040, or TFS-51494155-040
- Pushrod Length: Longer than stock required
- Spark Plugs: Autolite 3932
- NOTE: Valve cover rail is raised .350" over stock height.
- Viton® is a registered trademark of DuPont Performance Elastomers.



High Port® 192 Cylinder Heads for Small Block Ford

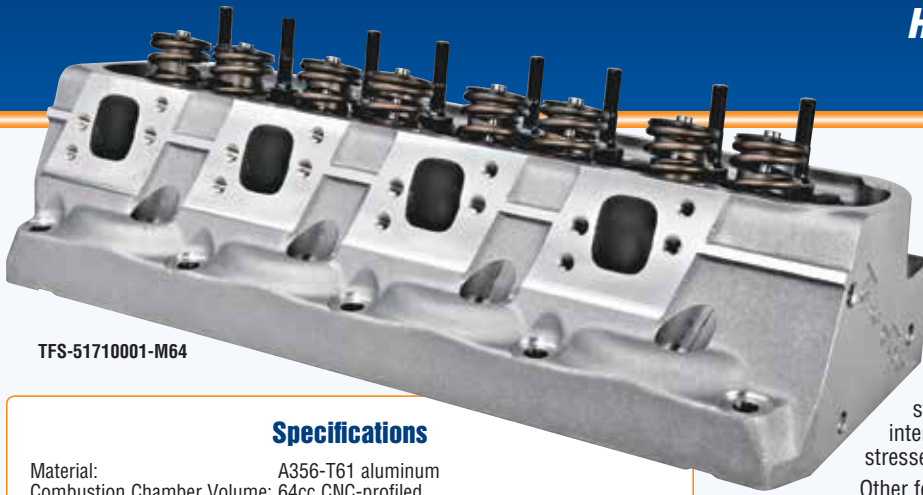

TFS-51710001-M64

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	64cc CNC-profiled
Intake Port Volume:	192cc Fast As Cast
Intake Port Location:	Stock
Intake Port Dimensions:	1.200" x 2.000"
Intake Gaskets:	Fel-Pro 1250
Intake Valve Diameter:	2.020" (TFS-51700211)
Intake Valve Seat:	Ductile iron interlock (TFS-51700271)
Exhaust Port Volume:	87cc Fast As Cast
Exhaust Port Location:	Raised .750" from stock
Exhaust Port Dimensions:	1.250" x 1.500"
Exhaust Gaskets:	Fel-Pro 1415
Exhaust Valve Diameter:	1.600" (TFS-51700212)
Exhaust Valve Seat:	Ductile iron (TFS-51700272)
Valve Angles:	20°
Valve Guide Material:	Bronze alloy (TFS-51700252)
Valve Seals:	Viton® fluoroelastomer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.615"
Valve Spring Cups:	1.480" (TFS-51400434)
Valve Spring Retainers:	7° x 1.500" o.d. chromoly steel (TFS-51400423)
Valve Stem Locks:	7° machined steel (TFS-51400444)
Valve Springs:	1.460" o.d. dual spring with damper (TFS-16315-16) 125 lbs. @ 1.800" installed height 376 lbs. @ 1.180" open 420 lbs. per inch rate .600" maximum valve lift
Guideplates:	5/16" (TFS-51700623), 3/8" (TFS-51700624)
Rocker Arm Studs:	3/8" (TFS-51400613)
Rocker Arms:	TFS-51400510 (1.6 ratio, 3/8" studs) TFS-51400511 (1.72 ratio, 3/8" studs) TFS-51400520 (1.6 ratio, 7/16" studs) TFS-51400521 (1.72 ratio, 7/16" studs)
Minimum Bore Diameter:	4.000"
Cylinder Head Bolts:	TFS-92005
Head Gaskets:	TFS-51494060-040, TFS-51494080-040, or TFS-51494155-040
Pushrod Length:	Longer than stock required
Spark Plugs:	Autolite 3924
NOTE:	Valve cover rail is raised .400" over stock height.
	Viton® is a registered trademark of DuPont Performance Elastomers.

Trick Flow High Port 192 cylinder heads for small block Ford are one of the most dominant aftermarket heads in racing. They feature unique valve spacing, .750" raised exhaust runners, extra strong castings and thick decks for additional rigidity and gasket integrity, superior cooling characteristics, and most importantly, excellent airflow.


And that's not all. The entry into the intake runner has been reshaped to help seal the area along the port roof and thicker port walls increase strength and provide more material for porting. Plus, interlocking ductile iron seats are used to handle the stresses of high heat, high horsepower applications.

Other features include fully CNC-profiled combustion chambers with port-to-valve seat blending (bowl blending), raised valve cover rails, and large Fast As Cast® runners that duplicate the profiles of CNC-ported heads to create ultra high-flowing heads without costly CNC-porting.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Trick Flow Fast Fact: Peak Power vs. Area Under the Curve

When looking at a graph from an engine or chassis dyno test, the first things most people look for are peak horsepower and torque figures. These numbers are useful for seeing exactly where in the rpm band an engine makes its power, or for judging the effects a particular part or parts combination can have on output. Peak numbers are great for bragging rights, too.

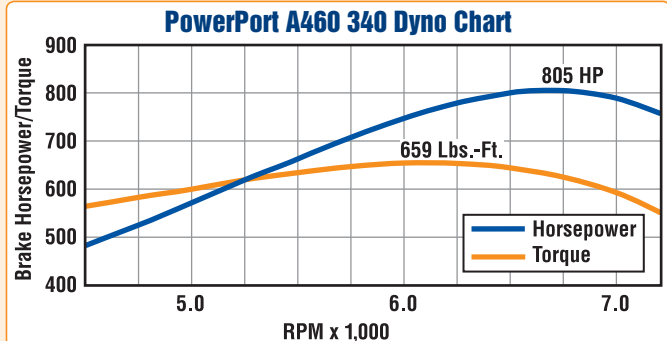

Test Engine: 10.5:1 compression 520 c.i.d. with Trick Flow Flow PowerPort® A460 340 cylinder heads (TFS-5441T801-M87), Crane mechanical roller camshaft (268°/278° duration @ .050"; .718"/.718" lift; 110° lobe separation), Trick Flow 1.73 ratio roller rocker arms (TFS-53400621), Trick Flow R-Series A460 intake manifold (TFS-54400111), Hooker headers with 2¼" primaries, open exhaust.

But the true measurement of real-world horsepower and torque—the stuff that gets your car moving and keeps it moving—is what's called the area under the curve. In basic terms, area under the curve indicates the overall amount of torque or horsepower an engine makes over its operating range. The wider the power curve is, the more area is underneath it. And more area under the curve means more power is produced over a wider rpm range, not just a particular rpm point or peak.

This principle also applies to cylinder head flowbench data. Peak intake and exhaust flow numbers make great ad copy, but the low and mid-lift flow numbers are just as critical. The area under the curve—in this case the valve lift curve—is the true measure of cylinder head performance.

Take a look at the dyno graph for a 520 cubic inch big block Ford equipped with Trick Flow PowerPort® A460 340 cylinder heads. Notice how smooth and wide the horsepower and torque curves are, and how much area is underneath them. That means this engine pulls like a freight train, and keeps on pulling all the way up to its rpm limit. That's the kind of power that gets respect on the street and wins races at the track—the kind of power Trick Flow products are designed to make!

High Port 192 Head, Fast As Cast Runners, Assembled

TFS-51710001-M64 192cc intake runners

Airflow Results High Port 192

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	67	55
.200"	137	103
.300"	194	138
.400"	244	166
.500"	270	183
.600"	283	193

Tests conducted at 28" of water (pressure).
Bore size: 4.030"; exhaust with 1¼" pipe.



High Port® 225 and 240 Cylinder Heads for Small Block Ford



TFS-5171T010-C01

Trick Flow has developed several fully CNC-ported versions of the High Port cylinder heads specifically for large cubic inch, large power adder, big shot nitrous oxide, and other mega-power combinations.

High Port 225 and 240 cylinder heads for small block Ford have all of the same features of Fast As Cast® High Port heads—unique valve spacing, raised exhaust runners, extra strong castings, thick decks, superior cooling, reshaped intake runner entries, extra material for porting, raised valve cover rails, and excellent airflow—plus top-of-the-line CNC Competition Ported runners with a high resolution surface finish for maximum airflow and power over the entire rpm range.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Airflow Results High Port 225 with 70cc Combustion Chambers

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	72	58
.200"	146	117
.300"	216	162
.400"	268	210
.500"	305	234
.600"	322	247
.700"	335	257

Tests conducted at 28" of water (pressure).
Bore size: 4.030"; exhaust with 2" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

High Port 225 Heads, CNC Competition Ported Runners, Assembled

- TFS-5171T010-C01 58cc combustion chambers, 1.560" dual valve springs, and titanium retainers, 225cc intake runners
- TFS-51710012-C01 70cc combustion chambers and 1.460" dual valve springs, 225cc intake runners
- TFS-5171T012-C01 70cc combustion chambers, 1.460" dual valve springs, and titanium retainers, 225cc intake runners
- TFS-5171T013-C01 70cc combustion chambers, 1.550" dual valve springs, and titanium retainers, 225cc intake runners
- TFS-5171T014-C01 70cc combustion chambers, 1.550" dual valve springs, O-rings, and titanium retainers, 225cc intake runners

High Port 240 Heads, CNC Competition Ported Runners, Assembled

- TFS-5171T016-C02 67cc combustion chambers, 1.550" dual valve springs, and titanium retainers, 240cc intake runners
- TFS-5171T018-C02 76cc combustion chambers, 1.550" dual valve springs, and titanium retainers, 240cc intake runners



Cylinder Head Bolt Reducer Bushings for Small Block Ford

These reducer bushings allow the use of 7/16" head bolts in heads with 1/2" head bolt bores.

TFS-51400419 Head bolt reducer bushings, pack of 20



Locating Dowels for Small Block Ford

These cylinder head locating dowels provide positive location of the cylinder heads on the engine block during installation.

TFS-51400420 Locating dowels, .650" high x .675" o.d. x 33/64" i.d., pack of 4



Specifications

- Material: A356-T61 aluminum
- Combustion Chamber Volume: 10-C01: 58cc CNC-profiled
12-C01/13-C01/14-C01: 70cc CNC-profiled
16-C02: 67cc CNC-profiled
18-C02: 76cc CNC-profiled
- Intake Port Volume: 10-C01/12-C01/13-C01/14-C01: 225cc CNC Competition Ported
16-C02/18-C02: 240cc CNC Competition Ported
- Intake Port Location: Stock
- Intake Port Dimensions: C01: 1.380" x 2.240"
C02: 1.310" x 2.300"
- Intake Gaskets: Fel-Pro 1262R
- Intake Valve Diameter: 2.080" (10-C01: TFS-52400217;
12-C01/13-C01/14-C01: TFS-51700217)
2.100" (16-C02: TFS-52400218;
18-C02: TFS-51700218)
- Intake Valve Seat: Ductile iron interlock (TFS-51700271)
- Exhaust Port Volume: 95cc CNC Competition Ported
- Exhaust Port Location: Raised .750" from stock
- Exhaust Port Dimensions: 1.520" x 1.620"
- Exhaust Gaskets: Fel-Pro 1487
- Exhaust Valve Diameter: 1.600" (10-C01: TFS-51700212;
12-C01/13-C01/14-C01/
16-C02/18-C02/C02: TFS-51700213)
- Exhaust Valve Seat: Ductile iron (TFS-51700272)
- Valve Angles: 20°
- Valve Guide Material: Bronze alloy (TFS-51700252)
- Valve Seals: Viton® fluor elastomer (TFS-51400454)
- Valve Seat Angles: 45° x multi-angle
- Valve Spring Pocket Diameter: 1.615"
- Valve Spring Cups: 1.480" (TFS-51400434)
- Valve Spring I.D. Locators: 1.550" (TFS-21400440)
- Valve Spring Retainers: 7° x 1.500" o.d. chromoly steel (TFS-51400423)
12-C01: 10° x 1.500" o.d. chromoly steel (TFS-21400424)
T12-C01: 10° x 1.500" o.d. titanium (TFS-214T0420)
10-C01/13-C01/14-C01/16-C02/18-C02: 10° x 1.550" o.d. titanium (TFS-214T0525)
- Valve Stem Locks: 7° machined steel (TFS-51400444)
10° machined steel with lash cap (TFS-52400444)
- Valve Springs, 10-C01: 1.560" o.d. dual spring with damper (TFS-16318-16)
240 lbs. @ 2.000" installed height
600 lbs. @ 1.280" open
500 lbs. per inch rate
.700" maximum valve lift
- Valve Springs, 12-C01: 1.460" o.d. dual spring with damper (TFS-16315-16)
125 lbs. @ 1.800" installed height
376 lbs. @ 1.180" open
420 lbs. per inch rate
.600" maximum valve lift
- Valve Springs, 13-C01/14-C01/16-C02/18-C02: 1.550" o.d. dual spring with damper (TFS-16324-16)
240 lbs. @ 1.920" installed height
550 lbs. @ 1.270" open
460 lbs. per inch rate
.680" maximum valve lift
- Guideplates: 5/16" (TFS-51700623), 3/8" (TFS-51700624)
- Rocker Arm Studs: 7/16" (TFS-51400614)
- Rocker Arms: TFS-51400510 (1.6 ratio, 3/8" studs)
TFS-51400511 (1.72 ratio, 3/8" studs)
TFS-51400520 (1.6 ratio, 7/16" studs)
TFS-51400521 (1.72 ratio, 7/16" studs)
- Minimum Bore Diameter: C01: 4.000"
C02: 4.125"
- Cylinder Head Bolts: TFS-92005
- Head Gaskets: TFS-51494060-040, TFS-51494080-040, or TFS-51494155-040
- Pushrod Length: Longer than stock required
- Spark Plugs: Autolite 3924
- NOTE: Valve cover rail is raised .400" over stock.
- Viton® is a registered trademark of DuPont Performance Elastomers.



Twisted Wedge® Top-End Engine Kits for Ford 5.0L



Trick Flow Twisted Wedge top-end engine kits provide dyno-proven power without the guesswork. Built around Trick Flow's Twisted Wedge 170 cylinder heads (TFS-51410004-M61), the kits include a specially matched Track Max® hydraulic roller cam (TFS-51403001), roller rockers (TFS-51400510), gasket kit (TFS-51400904), billet timing chain (TFS-51478520), pushrods (TFS-21406700), short valve covers, and our billet oil fill kit (TFS-51400800). Lifters not included.

Twisted Wedge StreetBurner® Top-End Engine Kits



These kits include everything listed above, plus Trick Flow's StreetBurner EFI intake manifold.

- TFS-K514-350-370 350 HP/370 lbs.-ft., silver valve covers and intake, each
- TFS-K514-350370B 350 HP/370 lbs.-ft., black valve covers and intake, each

Twisted Wedge Track Heat® Top-End Engine Kits

These kits include everything listed above, plus Trick Flow's Track Heat EFI intake manifold.

- TFS-K514-360-350 360 HP/350 lbs.-ft., silver valve covers and intake, each
- TFS-K514-360350B 360 HP/350 lbs.-ft., black valve covers and intake, each

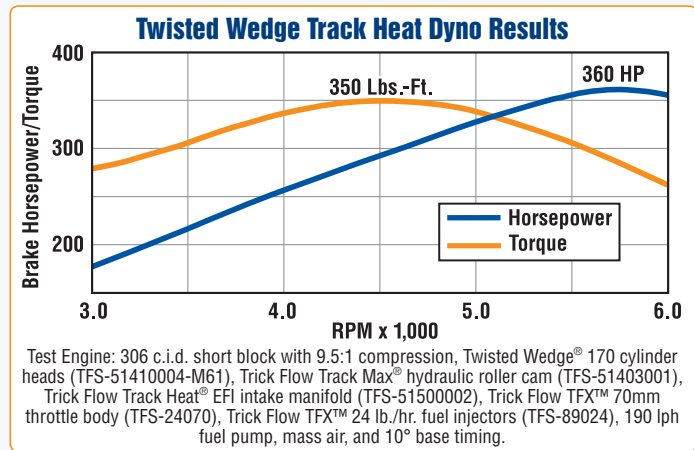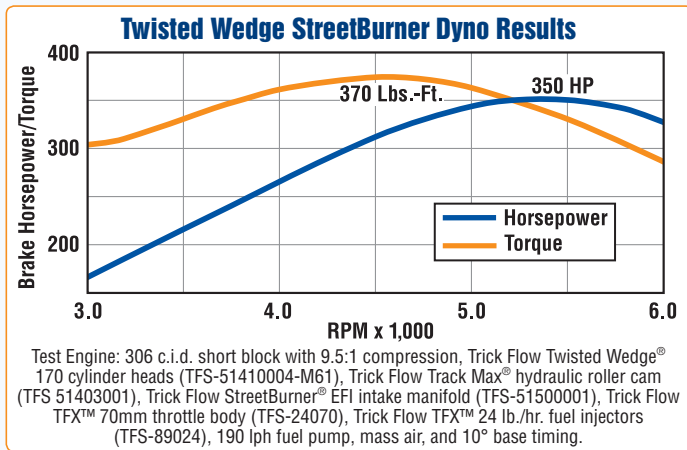

TFX™ Nitrous Systems for Trick Flow EFI Manifolds for Ford 5.0L

Trick Flow TFX nitrous systems are an easy, affordable way to bolt on big power. These EFI manifold nitrous systems are specifically designed for 1986-95 5.0L Fords with Trick Flow intake manifolds. TFX systems are adjustable in 50 horsepower increments from 50 to 200 horsepower. The systems include spray bar plates, calibrated solenoids, jets, switches, lines, filter, 10 lb. unfilled bottle, bottle brackets, 14 ft. of -4 AN braided stainless steel line, hardware, and instructions.

- TFS-N5150 Nitrous system, StreetBurner/Track Heat intakes, each
- TFS-N5150PL Plate and jets only, StreetBurner/Track Heat intakes, kit
- TFS-N515R Nitrous system, R-Series intake, each
- TFS-N515RPL Plate and jets only, R-Series intake, kit
- TFS-N5158 Nitrous system, Box-R-Series intake, each
- TFS-N5158PL Plate and jets only, Box-R-Series intake, kit



Header Flanges for Small Block Ford




- TFS-51700801 Header flanges, 3/8" thick, High Port cylinder heads, pair

EFI Intake Manifold Kits • EFI Fuel Rails and Kits for Ford 5.0L/351W

EFI Intake Manifold Kits for Ford 5.0L/351W

When it comes to making horsepower, one size doesn't fit all. That's why Trick Flow offers many intake manifold combinations for 5.0L and 351W Fords. Each manifold is computer-engineered to deliver an excellent balance of airflow distribution and velocity to increase low-end torque and provide superior high-rpm horsepower.

All Trick Flow manifold uppers are made from A319 aluminum and available in silver and black powdercoated finishes for long-lasting good looks, or in a natural version for those who prefer a natural aluminum look or wish to use a custom finish.



Silver Black Natural
All EFI intake manifolds are available with silver, black, or natural uppers!

NOTES:

- 5.0L StreetBurner EFI manifolds are 50-state emissions-legal under CARB E.O. #D-369-3.
- All other manifolds are designed for non-EGR engines.
- May require aftermarket fuel rails; computer modification required to operate properly.

EFI Intake Manifold Kits for Ford 5.0L

TFS-51500001	StreetBurner manifold kit, silver upper, each	50 STATE LEGAL
TFS-51500002	Track Heat manifold kit, silver upper, each	
TFS-51500003	R-Series 75mm manifold kit, silver upper, each	50 STATE LEGAL
TFS-51500005	R-Series 90mm manifold kit, silver upper, each	
TFS-51500008	Box-R-Series manifold kit, silver upper, each	50 STATE LEGAL
TFS-51511001	StreetBurner manifold kit, black upper, each	
TFS-51511002	Track Heat manifold kit, black upper, each	50 STATE LEGAL
TFS-51511003	R-Series 75mm manifold kit, black upper, each	
TFS-51511005	R-Series 90mm manifold kit, black upper, each	50 STATE LEGAL
TFS-51511008	Box-R-Series manifold kit, black upper, each	
TFS-515B0001	StreetBurner manifold kit, natural upper, each	50 STATE LEGAL
TFS-515B0002	Track Heat manifold kit, natural upper, each	
TFS-515B0003	R-Series 75mm manifold kit, natural upper, each	50 STATE LEGAL
TFS-515B0005	R-Series 90mm manifold kit, natural upper, each	
TFS-515B0008	Box-R-Series manifold kit, natural upper, each	



EFI Intake Manifold Kits for Ford 351W

TFS-51500004	R-Series 75mm manifold kit, silver upper, each
TFS-51500006	R-Series 90mm manifold kit, silver upper, each
TFS-51500009	Box-R-Series manifold kit, silver upper, each
TFS-51511004	R-Series 75mm manifold kit, black upper, each
TFS-51511006	R-Series 90mm manifold kit, black upper, each
TFS-51511009	Box-R-Series manifold kit, black upper, each
TFS-515B0004	R-Series 75mm manifold kit, natural upper, each
TFS-515B0006	R-Series 90mm manifold kit, natural upper, each
TFS-515B0009	Box-R-Series manifold kit, natural upper, each

PCV Valve, Grommet, and Filter Kit

TFS-51500810 PCV valve, grommet, and filter kit, screen-type filter, each



TFX™ EFI Fuel Rail Kits for Ford 5.0L

TFX EFI Fuel Rails

TFS-5158000R EFI fuel rails, pair



TFX EFI Fuel Rail Kit

TFS-51580001 EFI fuel rail kit, includes fuel rails, mounting brackets, fittings, hose, and fuel pressure regulator, each


EFI Intake Manifold Specifications for Ford 5.0L/351W

Manifold	5.0L				351W	
	StreetBurner®	Track Heat®	R-Series	Box-R-Series	R-Series	Box-R-Series
Engine Size	5.0L	5.0L	5.0L	5.0L	351W	351W
Runner	Small cross-section with 15.000" runner	Small cross-section with 12.200" runner	Large cross-section with 12.000" runner	Large cross-section with 9.750" runner	Large cross-section with 13.300" runner	Large cross-section with 11.000" runner
RPM Range	Idle-5,500	1,500-6,500	2,500-7,250/ 3,000-7,750	3,000-8,000	1,500-5,500/ 2,000-7,000	2,500-7,500
Throttle Body Inlet	75mm	75mm	75mm/90mm	90mm	75mm/90mm	90mm
Port Size at Head	2.000" x 1.200"	2.000" x 1.200"	2.000" x 1.200"	2.000" x 1.200"	2.000" x 1.200"	2.000" x 1.200"
Port Size at Mating Flange	2.000" x 1.200"	2.000" x 1.200"	2.380" x 1.380"	2.380" x 1.380"	2.380" x 1.380"	2.380" x 1.380"
Overall Height to Upper Manifold Flange	10.200"	10.200"	11.000"	12.300"	11.700"	13.100"
Overall Height to Lower Manifold Flange	4.625"	4.625"	4.625"	4.625"	5.375"	5.375"



Track Max® Hydraulic Roller Camshafts for Ford 5.0L

TFS-51403001

 Camshaft Specifications		Duration @ .050"	Valve Lift w/1.6 Rocker	Lobe Sep.
Part Number	Characteristics			
TFS-51403001	Street; good idle, strong midrange power, 2,000-5,000 rpm powerband. Aftermarket intake, heads, and headers recommended. Calibrated mass airflow meter required. Compression: 9:1 minimum.	221°/225°	.499"/.510"	112°
TFS-51403002	Street/strip; fair idle, good midrange power, 2,500-6,000 rpm powerband. 2,500-3,000 rpm stall converter or 5-speed transmission. 3.55 or numerically higher gears. Calibrated mass airflow meter required. Compression: 9.5:1 minimum.	224°/232°	.542"/.563"	112°
TFS-51403003	Race; rough idle, strong top-end power, 3,200-6,800 rpm powerband. 3,000-3,500 rpm stall converter. 3.90-4.11 gears. Calibrated mass airflow meter required. Compression: 10:1 minimum.	236°/248°	.574"/.595"	110°
TFS-51403004	Race; rough idle, strong top-end power, 3,000-7,000 rpm powerband. 3,000-3,500 rpm stall converter. 3.90-4.11 gears. Calibrated mass airflow meter required. Compression: 10:1 minimum.	242°/246°	.595"/.595"	110°
TFS-51403005	Race; rough idle, strong top-end power, 3,400-7,000 rpm powerband. 3,000-3,500 rpm stall converter. 3.90-4.11 gears. Calibrated mass airflow meter required. Compression: 10:1 minimum.	250°/254°	.595"/.595"	110°

True Roller Timing Chain Set for Small Block Ford

Billet steel gears and a double roller timing chain combine to make this Trick Flow timing chain set the strongest, most accurate available today. Furthermore, the crank sprocket features multiple keyways to allow the cam to be installed straight-up, retarded, or advanced.



TFS-51478520

Timing chain set, each



TFS-51400931



Individual Gaskets

Trick Flow gaskets are made from high-quality materials with superior fit and designed to deliver trouble-free performance over the long haul. The individual replacement gaskets save you money by letting you purchase just the gaskets you need instead of an entire kit.

- TFS-51400921 Intake manifold gaskets with crossover, pair
- TFS-51400931 Header gaskets, OE Ford cylinder heads, pair
- TFS-51400941 Valve cover gaskets, molded with steel core, pair
- TFS-51400951 Oil pan gasket, one-piece molded, each
- TFS-51700931 Header gaskets, Trick Flow High Port cylinder heads, pair
- TFS-52400901 Header gaskets, Trick Flow Twisted Wedge® Race cylinder heads, pair
- TFS-52400921 Intake manifold gaskets, large race, 2.250" x 1.400", 1/16" thick, pair
- TFS-52400922 Intake manifold gaskets, large race, 2.250" x 1.400", .090" thick, pair
- TFS-52400923 Intake manifold gaskets, large race, 2.250" x 1.400", 1/8" thick, pair

Standard Gasket Sets for Small Block Ford



These Trick Flow gasket sets are ideal for stock or mild performance engine buildups. They include everything required to seal an engine, including header gaskets, for about the same price as other companies' less complete kits.

- TFS-5140E912 Engine gasket set, with two-piece rear main seal, each
- TFS-5140E913 Engine gasket set, with EFI and one-piece rear main seal, each



TFS-51400914

Premium Gasket Sets for Small Block Ford



Sets include cylinder head gaskets, intake gaskets, exhaust gaskets, valve cover gaskets, oil pan gaskets, and other gaskets specific to the application.

Engine Gasket Sets

- TFS-51400912 Engine gasket set, 302/5.0L, with EFI, includes Loc-Wire and GT-40 upper gasket, each
- TFS-51400914 Engine gasket set, Twisted Wedge cylinder heads, each
- TFS-51400915 Engine gasket set, Twisted Wedge cylinder heads with O-rings, each
- TFS-51700914 Engine gasket set, High Port cylinder heads, each
- TFS-51700915 Engine gasket set, High Port cylinder heads with O-rings, each

Head Gasket Sets

Sets include head gaskets, intake gaskets, exhaust gaskets, valve cover gaskets, and other gaskets specific to the application.

- TFS-51400902 Head gasket set, 302/5.0L with EFI, includes Loc-Wire and GT-40 upper gasket, each
- TFS-51400903 Head gasket set, Twisted Wedge cylinder heads with O-rings, carbureted intake manifold, each
- TFS-51400904 Head gasket set, Twisted Wedge cylinder heads, each
- TFS-51400905 Head gasket set, Twisted Wedge cylinder heads with O-rings, EFI intake manifold, each
- TFS-51700904 Head gasket set, High Port cylinder heads, each
- TFS-51700905 Head gasket set, High Port cylinder heads with O-rings, each

Rocker Arms • Valve Spring Upgrade Kits • Stud Girdles • Intake Manifolds • Cylinder Head Bolt Kit for Small Block Ford

Roller Rocker Arms for Small Block Ford



TFS-51400510

These aluminum roller rockers are excellent for use with Trick Flow heads. They can also be used on Ford factory and other aftermarket heads. They feature heat-treated CNC-machined bodies, premium needle-bearing fulcrums, roller tips, and a machined relief for improved valve spring clearance. Trick Flow roller rockers are sold in sets of 16 and come complete with polylocks.

TFS-51400510	Rocker arms, 1.6 ratio, 3/8" studs, set of 16
TFS-51400511	Rocker arms, 1.72 ratio, 3/8" studs, set of 16
TFS-51400512	Rocker arms, 1.6/1.72 ratio split, 3/8" studs, set of 16
TFS-51400520	Rocker arms, 1.6 ratio, 7/16" studs, set of 16
TFS-51400521	Rocker arms, 1.72 ratio, 7/16" studs, set of 16
TFS-51400522	Rocker arms, 1.6/1.72 ratio split, 7/16" studs, set of 16

Rocker Stud Girdles for Small Block Ford



TFS-52400701

These CNC-machined stud girdles help control valve lift and timing changes due to stud flex, allowing more consistent high-rpm performance. Each stud girdle is anodized blue and comes with high-quality mounting hardware and hardened adjusting nuts. Tall-style valve covers are required.

Girdles for Twisted Wedge Heads

TFS-51400700	Rocker stud girdles, 3/8", pair
TFS-51400701	Rocker stud girdles, 7/16", pair

Girdles for High Port Heads

TFS-51700700	Rocker stud girdles, 3/8", pair
TFS-51700701	Rocker stud girdles, 7/16", pair

Girdles for Race Heads

TFS-52400701	Rocker stud girdles, 7/16", pair
--------------	----------------------------------

Trick Flow by PAC Racing Valve Spring Upgrade Kits for Small Block Ford



TFS-2500100

These kits include everything needed to upgrade the valve springs on OEM PAC or Twisted Wedge® heads. The OEM spring upgrade kit is for 289-351W Ford cast iron heads and will provide 110 lbs. of seat pressure at 1.800" installed height and .540" max lift. The PAC dual spring upgrade kit converts standard Twisted Wedge 170 heads to the optional high lift cam spring set with 125 lbs. of seat pressure at 1.800" installed height and .600" max lift. Both kits include valve springs with dampers, chromoly retainers, valve seals and locks, spring shims, spring height gauge, and instructions.

TFS-2500100	Valve spring upgrade kit, OEM 289-351W cast iron heads, each
TFS-2500200	Valve spring upgrade kit, upgrades Twisted Wedge 170 heads to optional high lift cam spring set, each

R-Series Intake Manifolds for Small Block Ford

TFS-52400115




Trick Flow R-Series single plane intake manifolds for small block Ford are designed for maximum power delivery in heavily modified street/strip and race engines that operate in the 3,500-7,500 plus rpm range—right where it's needed the most. Vital features include A319 aluminum construction, integral bosses for nitrous or fuel injection nozzles, extra material for custom port work, and your choice of mounting patterns. The carb-style EFI version accepts standard Bosch or Siemens type fuel injectors. The port size at the head flange for these manifolds is 2.100" x 1.280", but they can be port matched as large as 2.250" x 1.400". Overall height to the mounting pad is 6.300" (5.0L/302) or 6.450" (351W).

R-Series Intake Manifolds

TFS-52400111	Manifold, 289/302, square bore carburetor, each
TFS-52400112	Manifold, 289/302, carb-style EFI, each
TFS-52400114	Manifold, 351W, square bore carburetor, each
TFS-52400115	Manifold, 351W, carb-style EFI, each

TFX EFI Fuel Rails

TFS-5248000R	EFI fuel rails, 289/302, carb-style EFI manifolds, pair
TFS-5248005R	EFI fuel rails, carb-style EFI manifolds, 351W, pair

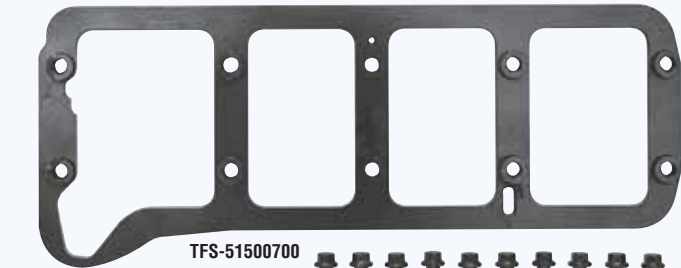

TFS-51500700

Main Stud Girdles for Small Block Ford



Trick Flow bolt-on main girdles strengthen Ford's factory two-bolt main cap assembly. The girdles are made from tool steel, finished with black oxide, and come with ARP main cap bolts and a provision for an oil pump pickup tube hold down. The race girdle features beefier 1/2" thick construction for extra strength and includes main studs instead of bolts.

NOTE: Race version requires main cap machining.

Main Stud Girdles, Street

TFS-51500700	Main stud girdle, 289/302, each
TFS-51500701	Main stud girdle, 351W, each

Main Stud Girdles, Race

TFS-5150R700	Main stud girdle, 289/302, each
--------------	---------------------------------



Cylinder Head Bolt Kit for Small Block Ford



Keep combustion where it belongs! Trick Flow's high-quality cylinder head bolt kits provide consistent clamping force from bolt-to-bolt. The bolts are made from premium quality alloy steel with cold-formed heads and rolled threads. A black oxide finish protects them from wear and corrosion. The kit contains all the bolts you need to install a pair of heads, including hardened washers.

TFS-92005	Cylinder head bolt kit, 289/302, hex head, each
-----------	---

Small Block Ford



**Chrome Valve Covers
for Small Block Ford**

Trick Flow chrome plated valve covers provide a great alternative to higher-priced aluminum covers. They feature embossed Trick Flow logos and triple chrome plating for a long-lasting shine. New gaskets are included.

TFS-44002 Valve covers, chrome, pair



TFS-51400802



TFS-51411802

**Cast Aluminum Valve Covers
for Small Block Ford**



Made from durable A319 aluminum, Trick Flow cast aluminum valve covers are much less prone to flex and distortion than stamped steel covers, which helps prevent oil leaks. The covers come in standard height to clear most roller rockers and tall height to clear stud girdles and roller rockers. Covers can be drilled for breathers.

Standard Height Covers, 3" Overall Height

NOTE: These covers will clear roller rocker arms but not rocker stud girdles.

- TFS-51400801 Valve covers, silver, pair
- TFS-51411801 Valve covers, black, pair
- TFS-5140B801 Valve covers, natural, pair
- TFS-25200801 Hardware kit, includes twelve 1/4"-20 x 1.500" studs and 12 flanged nuts, each

Tall Height Covers, 3 3/8" Overall Height

NOTE: These covers will clear roller rocker arms and rocker stud girdles.

- TFS-51400802 Valve covers, silver, pair
- TFS-51411802 Valve covers, black, pair
- TFS-5140B802 Valve covers, natural, pair
- TFS-25200802 Hardware kit, includes ten 1/4"-20 x 1.500" studs, two 1/4"-20 x 4.250" studs and 12 flanged nuts, each



**Fabricated Aluminum Valve Covers
for Small Block Ford**



These good-looking, tall height (3 3/8" overall) fabricated valve covers have an embossed Trick Flow logo and clear roller rockers and stud girdles. They're made from .084" thick aluminum to reduce engine weight and include the necessary fasteners to ensure a correct installation.

TFS-51400804 Valve covers, natural, pair

**Twisted Wedge® Forged Piston Sets
for Small Block Ford**



Trick Flow's lightweight forged pistons are fully skirted and precision-machined from premium aluminum alloy. They feature oversized valve reliefs, precision-fit wrist pins, and Spirolox retainers.

Trick Flow pistons are designed to perfectly match the unique chamber and valve angles of the Twisted Wedge heads. They're available with a choice of compression ratios for hot street/strip engines. Pistons are available as low as 8.0:1 for supercharged Ford applications.

All pistons use ring sets with a 1/16" top ring, 1/16" second ring, and 3/16" oil control ring. Sold in sets of 8.

NOTE: Compression ratios are based on 61cc combustion chamber heads.



TFS-51404330



TFS-51404000

Specifications

Part Numbers	Engine Size	Bore	Stroke	Rod	Comp. Height	Comp. Ratio	Pin Dia.
TFS-51404010	306 (302)	4.030"	3.000"	5.090"	1.610"	8.0:1	.912"
TFS-51404000	306 (302)	4.030"	3.000"	5.090"	1.600"	10.0:1	.912"
TFS-51404332	331 (302)	4.030"	3.250"	5.400"	1.175"	10.0:1	.927"
TFS-51404111	347 (302)	4.030"	3.400"	5.400"	1.090"	10.0:1	.927"
TFS-51404110	347 (302)	4.030"	3.400"	5.400"	1.090"	8.5:1	.927"
TFS-51404221	358 (351W)	4.030"	3.500"	5.955"	1.785"	10.0:1	.912"
TFS-51404010	393 (351W)	4.030"	3.850"	5.955"	1.610"	10.0:1	.912"
TFS-51404000	393 (351W)	4.030"	3.850"	5.955"	1.610"	12.0:1	.912"
TFS-51404331	408 (351W)	4.030"	4.000"	6.200"	1.290"	10.0:1	.927"
TFS-51404330	408 (351W)	4.030"	4.000"	6.200"	1.290"	8.5:1	.927"

Oil Fill Kit • A/C Bracket • Underdrive Pulley Kits • Throttle Body Adapters • Throttle Cable Brackets • EFI Heat Spacers for Ford 5.0L/351W

Billet Oil Fill Kit for Ford 5.0L



This great-looking oil fill kit is specially made to work with small block EFI Fords with Trick Flow short valve covers. Made from billet aluminum, it comes with a vacuum fitting, an O-ring cap, and value cover grommet. The kit also has a clear corrosion-resistant finish for long life and is 4" tall.

- TFS-51400800 Billet oil fill kit, each
- TFS-51400800-C Replacement cap, with O-ring, each
- TFS-51400800-G Replacement grommet, 3/4", each



TFS-51400800

A/C Eliminator Bracket for Ford 5.0L

Designed for 1986-93 5.0L Mustang, this Trick Flow A/C eliminator bracket mounts above the water pump and bolts to the power steering unit using your stock hardware. The bracket is made from 6061 aluminum, powdercoated black, and comes with all necessary mounting hardware. Pulley not included.



TFS-51500600

NOTE: New serpentine belt required after installation.

- TFS-51500600 Eliminator bracket, each



TFS-34000

Underdrive Pulley Kits for Ford 5.0L

Trick Flow underdrive pulleys are a simple way to boost horsepower. The precision balanced, billet aluminum pulleys have a blue anodized finish and are sold in complete sets that include a 6 groove crankshaft pulley, non-ribbed water pump pulley, 6 groove alternator pulley, and new mounting hardware.

- TFS-34000 Pulleys, 1982-96 Ford 5.0L/5.8L (except 1994-95 Mustang), set of 3
- TFS-34001 Pulleys, 1994-95 Mustang 5.0L, set of 3



EFI Intake Manifold SN95 Throttle Body Adapters for Ford 5.0L

These aluminum adapters allow Trick Flow manifolds to be mounted on 1994-95 5.0L Mustangs. They feature a 75mm throttle bore and include mounting gaskets.

- TFS-5150SN95 Adapter, natural, each
- TFS-5150SN95-00 Adapter, silver, each
- TFS-5150SN95-11 Adapter, black, each



TFS-5150SN95

Throttle Cable Bracket Kits for Ford 5.0L/351W EFI Intake Manifolds

Trick Flow throttle cable bracket kits provide a place to mount throttle cables on 1986-93 5.0L Mustangs with either 75mm or 90mm manifolds and no EGR plate. They feature a clear anodized finish and include gaskets and mounting hardware.

- TFS-51500075 Throttle cable bracket kit, 75mm manifolds, each
- TFS-51500090 Throttle cable bracket kit, 90mm manifolds, each



TFS-51500090



TFS-51520001



TFS-51520009



TFS-51520013



TFS-51520017

EFI Heat Spacer Kits for Ford 5.0L/351W



CNC-machined in the USA from premium phenolic material, Trick Flow EFI heat spacers fit between the upper and lower intakes to create a heat flow barrier. This keeps the air in the upper intake cooler and denser. In addition, they will allow the use of taller valve covers by raising the upper intake.

Trick Flow EFI spacers are available in 3/8" and 1" thick versions. Gaskets and longer mounting bolts are included. 1994-95 Mustangs will require modifications for hood clearance.

5.0L H.O. Heat Spacer Kits, 1986-93

- TFS-51520001 Spacer, 3/8", each
- TFS-51520002 Spacer, 1", each

5.0L H.O. Heat Spacer Kits, 1994-95

- TFS-5152SN01 Spacer, 3/8", each
- TFS-5152SN02 Spacer, 1", each

5.0L Ford Truck Heat Spacer Kits

- TFS-51520003 Spacer, 3/8", each
- TFS-51520004 Spacer, 1", each

Holley Manifold Heat Spacer Kits

- TFS-51520005 Spacer, 3/8", each
- TFS-51520006 Spacer, 1", each

Trick Flow StreetBurner® and Track Heat® Spacer Kits

- TFS-51520007 Spacer, 3/8", each
- TFS-51520008 Spacer, 1", each

Trick Flow R-Series Spacer Kits

- TFS-51520009 Spacer, 3/8", each
- TFS-51520012 Spacer, 1", each

Edelbrock Performer 5.0L RPM Spacer Kits

- TFS-51520013 Spacer, 3/8", each
- TFS-51520014 Spacer, 1", each

Edelbrock Performer 5.0L RPM II Spacer Kits

- TFS-51520021 Spacer, 3/8", each
- TFS-51520022 Spacer, 1", each

Edelbrock Victor 5.0L Spacer Kits

- TFS-51520015 Spacer, 3/8", each
- TFS-51520016 Spacer, 1", each

Ford Racing Cobra Heat Spacer Kits

- TFS-51520017 Spacer, 3/8", each
- TFS-51520018 Spacer, 1", each

Ford Racing GT-40 Heat Spacer Kits

- TFS-51520019 Spacer, 3/8", each
- TFS-51520020 Spacer, 1", each

PowerPort® 290 and 325 Cylinder Heads for Ford 429/460



TFS-5341T010-C01

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	01/02/03/04: 74cc standard C00/C01: 78cc CNC-profiled
Intake Port Volume:	01/02/03/04: 290cc Fast As Cast C00: 325cc CNC Street Ported C01: 325cc CNC Competition Ported
Intake Port Location:	Stock
Intake Port Dimensions:	01/02/03/04: 1.960" x 2.210" C00/C01: 2.030" x 2.540"
Intake Gaskets:	01/02/03/04: Fel-Pro 1230 C00/C01: TFS-53400921
Intake Valve Diameter:	01/02/03/04: 2.200" (TFS-53400211) C00/C01: 2.250" (TFS-53400213)
Intake Valve Seat:	Ductile iron (TFS-53400271)
Exhaust Port Volume:	01/02/03/04: 130cc Fast As Cast C00: 145cc CNC Street Ported C01: 145cc CNC Competition Ported
Exhaust Port Location:	Raised .270" from stock
Exhaust Port Dimensions:	01/02/03/04: 1.400" x 1.850" D-shape C00/C01: 1.550" x 1.925"
Exhaust Gaskets:	Fel-Pro 1420
Exhaust Valve Diameter:	1.760" (TFS-53400212)
Exhaust Valve Seat:	Ductile iron (TFS-53400272)
Valve Angles:	Intake 15°/5°, exhaust 15.25°/4.5°
Valve Guide Material:	Bronze alloy (TFS-51600252)
Valve Seals:	Viton® fluoroelastomer (TFS-51400454)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.760"
Valve Spring Cups:	1.640" (TFS-41400434)
Valve Spring I.D. Locators:	1.460/1.550" (TFS-21400440)
Valve Spring Retainers:	7" x 1.500" o.d. chromoly steel (TFS-51400423) 10" x 1.550" o.d. chromoly steel (TFS-21400425) 10" x 1.550" o.d. titanium (TFS-214T0520) 10" x 1.625" o.d. + .050" titanium (TFS-214T0620)
Valve Stem Locks:	7" machined steel (TFS-51400444) 10" machined steel with lash cap recess (TFS-52400444)
Valve Springs:	1.460" o.d. dual with damper
PowerPort 290/325 Standard	120 lbs. @ 1.900" installed height (TFS-16893-16) 394 lbs. @ 1.175" open 390 lbs. per inch rate .650" maximum valve lift
Valve Springs:	1.550" o.d. dual spring with damper
PowerPort 290 Option 1	(TFS-16094-16) 138 lbs. @ 1.950" installed height 430 lbs. @ 1.250" open 420 lbs. per inch rate .680" maximum valve lift
Valve Springs:	1.550" o.d. dual spring with damper
PowerPort 290 Option 2	(TFS-16324-16) 215 lbs. @ 1.950" installed height 550 lbs. @ 1.270" open 460 lbs. per inch rate .680" maximum valve lift
Valve Springs:	1.640" o.d. dual spring with damper
PowerPort 290 Option 3, PowerPort 325 Option 1	(TFS-16414-16) 250 lbs. @ 2.000" installed height 800 lbs. @ 1.150" open 600 lbs. per inch rate .850" maximum valve lift
Guideplates:	3/8" (TFS-53400623)
Rocker Arm Studs:	7/16" (TFS-41400613)
Rocker Arms:	TFS-53400621 (1.73 ratio, 7/16" studs)
Minimum Bore Diameter:	4.360"
Cylinder Head Bolts:	ARP 155-3603
Head Gaskets:	TFS-53494500-04
Pushrod Length:	Longer than stock required
Spark Plugs:	Autolite 3924


Viton® is a registered trademark of DuPont Performance Elastomers.

Trick Flow PowerPort cylinder heads are designed for high performance Ford 429/460 street and street/strip applications, providing significant horsepower and torque gains over similar-style cylinder heads. Highlights include an extremely efficient chamber design for more complete combustion and exhaust ports raised .270" from stock for increased airflow.

The PowerPort 290 heads feature Fast As Cast® runners that duplicate the port shape and profile of CNC-ported heads, delivering near-CNC-ported airflow, power, and performance for about the same price as regular cast cylinder heads. The PowerPort 325 heads are available with two runner configurations: CNC Street Ported or CNC Competition Ported. PowerPort 325 heads with CNC Street Ported runners are great entry-level CNC heads with fully CNC-machined runners and combustion chambers with a standard resolution surface finish for significant performance gains over regular cast heads. PowerPort 325 heads with CNC Competition Ported runners feature CNC-profiled combustion chambers and runners with a premium high resolution surface finish for maximum, all-out performance.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Dyno Results PowerPort 290

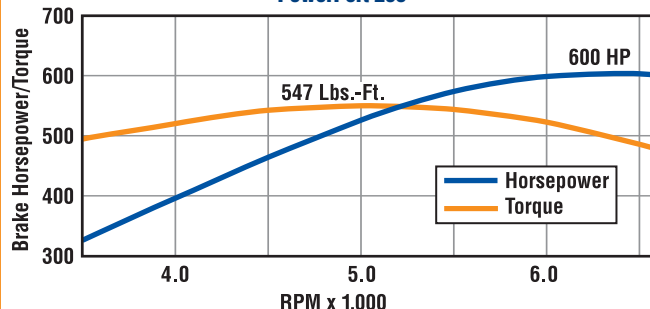

Test Engine: 10.25:1 compression 460 c.i.d. with Trick Flow Flow PowerPort® 290 cylinder heads (TFS-53410003), COMP Cams Xtreme Energy mechanical roller camshaft (254°/260° duration @.050"; .671"/.678" lift; 110° lobe separation), Trick Flow 1.73 ratio roller rocker arms (TFS-53400621), Edelbrock Performer RPM intake manifold, Hedman headers with 1½" primaries, 3" dual exhaust with Flowmaster mufflers.

PowerPort 290 Heads, Fast as Cast Runners, Assembled

TFS-53410001	1.460" dual valve springs, 290cc intake runners
TFS-53410002	1.550" dual valve springs, 290cc intake runners
TFS-5341T002	1.550" dual valve springs and titanium retainers, 290cc intake runners
TFS-53410003	1.550" dual valve springs, 290cc intake runners
TFS-5341T003	1.550" dual valve springs and titanium retainers, 290cc intake runners
TFS-5341T004	1.640" dual valve springs and titanium retainers, 290cc intake runners

PowerPort 325 Head, CNC Street Ported Runners, Assembled

TFS-53410007-C00 1.460" dual valve springs, 325cc intake runners

PowerPort 325 Heads, CNC Competition Ported Runners, Assembled

TFS-53410007-C01	1.460" dual valve springs, 325cc intake runners
TFS-5341T010-C01	1.640" dual valve springs and titanium retainers, 325cc intake runners


Airflow Results PowerPort 290

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	72	60
.200"	152	110
.300"	219	145
.400"	280	180
.500"	331	204
.600"	344	225
.700"	350	240

Tests conducted at 28" of water (pressure).
Bore size: 4.380"; exhaust with 2" pipe.



PowerPort® A460 340 and 360 Cylinder Heads for Ford 429/460

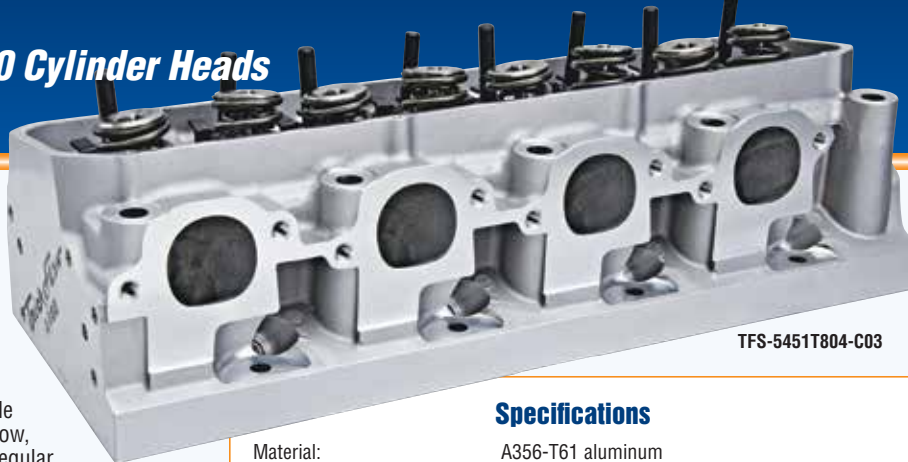

TFS-5451T804-C03

Trick Flow's potent PowerPort A460 340 and 360 cylinder heads for Ford 429/460 are ideal for use in drag racing, monster trucks, tractor pulling, and other ultra high power, large cubic inch engine combinations.

Notable features include big block Chevrolet-style exhaust port openings and bolt pattern plus your choice of standard or heavy duty 18-bolt mounting patterns.

The PowerPort 340 heads feature Fast As Cast® runner design that duplicates the port shape and profile of CNC-ported heads, delivering near-CNC-ported airflow, power, and performance for about the same price as regular cast cylinder heads. The PowerPort 360 heads feature CNC Competition Ported runners with our top-of-the-line, premium high resolution surface finish for maximum airflow and performance in all-out naturally aspirated or forced induction applications.

Cylinder heads are available fully assembled or as bare castings. Sold individually.

Airflow Results PowerPort A460 340 with Standard Bolt Pattern

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	76	67
.200"	160	120
.300"	246	162
.400"	312	204
.500"	357	237
.600"	392	264
.700"	418	286
.800"	428	303

Tests conducted at 28" of water (pressure).
Bore size: 4.500"; intake valve: 2.350"; exhaust with 2" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

PowerPort A460 340 Heads, Fast As Cast Runners, Assembled

TFS-5441T801-M87	87cc combustion chambers, standard bolt pattern, and 2.300" intake valves, 340cc intake runners
TFS-5441T802-M83	83cc combustion chambers, standard bolt pattern, and 2.350" intake valves, 340cc intake runners
TFS-5441T802-M87	87cc combustion chambers, standard bolt pattern, and 2.350" intake valves, 340cc intake runners
TFS-5451T802-M83	83cc combustion chambers, 18-bolt pattern, and 2.350" intake valves, 340cc intake runners
TFS-5451T802-M87	87cc combustion chambers, 18-bolt pattern, and 2.350" intake valves, 340cc intake runners

PowerPort A460 360 Heads, CNC Competition Ported Runners, Assembled

TFS-5451T804-C03	85cc combustion chambers, 18-bolt pattern, and 2.400" intake valves, 360cc intake runners
TFS-5451T8T5-C03	85cc combustion chambers, 18-bolt pattern, and 2.400" titanium intake valves, 360cc intake runners
TFS-5451T804-C04	87cc combustion chambers, 18-bolt pattern, and 2.400" intake valves, 360cc intake runners

Airflow Results PowerPort A460 360

Lift Value	Intake Flow CFM	Exhaust Flow CFM
.100"	79	71
.200"	162	129
.300"	244	175
.400"	308	216
.500"	369	251
.600"	410	280
.700"	437	304
.800"	453	321

Tests conducted at 28" of water (pressure).
Bore size: 4.600"; intake valve: 2.400"; exhaust with 2" pipe.

To view more airflow charts, go to TrickFlow.com and type the part number you want to see into the Search box and then click "Search."

Specifications

Material:	A356-T61 aluminum
Combustion Chamber Volume:	M83: 83cc CNC-profiled M87: 87cc CNC-profiled C03: 85cc CNC-profiled C04: 87cc CNC-profiled
Intake Port Volume:	M83/M87: 340cc Fast As Cast C03/C04: 360cc CNC Competition Ported Raised 1.000" from stock
Intake Port Location:	M83/M87: 1.810" x 2.460" C03/C04: 1.810" x 2.490"
Intake Port Dimensions:	
Intake Gaskets:	TFS-2706
Intake Valve Diameter:	M87 Standard: 2.300" (TFS-54400211) M83/M87/C03 18-bolt: 2.350" (TFS-54400210) C03/C04 18-bolt: 2.400" (TFS-54503211) C03 Titanium: 2.400" (TFS-5450T211)
Intake Valve Seat:	Ductile iron (TFS-54400271)
Exhaust Port Volume:	M83/M87: 172cc Fast As Cast C03/C04: 180cc CNC Competition Ported Raised 1.500" from stock
Exhaust Port Location:	1.900" x 1.850" D-shape
Exhaust Port Dimensions:	
Exhaust Gaskets:	Fel-Pro 1412
Exhaust Valve Diameter:	M83/M87: 1.880" (TFS-54400212) C03/C04: 1.880" (TFS-54503212)
Exhaust Valve Seat:	Ductile iron interlock (TFS-54400272)
Valve Angles:	Intake 13°/5°, exhaust 9.5°/5°
Valve Guide Material:	M83/M87: Bronze alloy (intake TFS-41400251, exhaust TFS-41400252) C03/C04: Bronze alloy (intake TFS-54500252, exhaust TFS-54500253)
Valve Seals:	M83/M87: Viton® fluoroelastomer (TFS-51400454) C03/C04: Viton® fluoroelastomer (intake TFS-54500454, exhaust TFS-54500455)
Valve Seat Angles:	45° x multi-angle
Valve Spring Pocket Diameter:	1.760"
Valve Spring Cups:	1.640" (TFS-41400434)
Valve Spring Retainers:	M83/M87: 10° x 1.625" o.d. titanium (TFS-214T0620) C03/C04: 10° x 1.625" o.d. titanium (TFS-214T0650)
Valve Stem Locks:	M83/M87: 10° machined steel with lash cap recess (TFS-52400444) C03/C04: 10° steel bead lock with lash cap recess (intake TFS-54500444, exhaust TFS-54500445)
Valve Springs, 340cc:	1.640" o.d. dual spring with damper (TFS-16414-16) 250 lbs. @ 2.000" installed height 800 lbs. @ 1.150" open 600 lbs. per inch rate .850" maximum valve lift
Valve Springs, 360cc:	1.645" o.d. triple spring (TFS-16948-16) 332 lbs. @ 2.100" installed height 950 lbs. @ 1.200" open 688 lbs. per inch rate .900" maximum valve lift
Guideplates:	3/8" (TFS-54400623), 7/16" (TFS-54400624)
Rocker Arm Studs:	7/16" (intake TFS-54400614, exhaust TFS-41400615)
Rocker Arms:	TFS-53400621 (1.73 ratio, 7/16" studs)
Minimum Bore Diameter:	M83/M87: 4.390" C03/C04: 4.500"
Cylinder Head Bolts:	ARP 255-4304
Head Gaskets:	TFS-53494500-04, TFS-53494670-040 (standard), TFS-54594600-045 (18-bolt)
Pushrod Length:	Longer than stock required
Spark Plugs:	Autolite 3924

Viton® is a registered trademark of DuPont Performance Elastomers.



R-Series A460 Intake Manifolds for Ford 429/460 with Trick Flow PowerPort® A460 Cylinder Heads

Intended for 500-plus cubic inch, high-RPM engines, the Trick Flow R-Series single plane intake manifold features a one-piece, spider-type design with high-flow, extended individual runners and a raised plenum floor for significant horsepower and torque increases. Other features include A319 aluminum construction, extra material for custom port work, and bosses for nitrous or fuel injection. The manifold is designed for Holley 4500 Dominator-style carbs; overall height to carburetor mounting pad is 8.600".

The R-Series A460 tunnel ram manifold has many new exciting features. For starters, the entire A319 aluminum casting was put on a diet to decrease weight. Part of this process included eliminating the water crossover, but bosses have been incorporated on the intake flange to allow external plumbing of a coolant crossover and thermostat, if desired. Additional bosses have also been added to the runners to accommodate fuel injection or multi-stage nitrous injection. The R-Series A460 tunnel ram excels in large cubic inch, high-RPM applications such as tractor pulling and drag racing. The available top covers mount single or dual Holley 4500 Series Dominator-style carbs. Overall height to the top of carburetor mounting pad is 10.480" with the dual carb top and 13.100" with the single carb top.

NOTE: These intake manifolds only fit engines equipped with Trick Flow PowerPort® A460 cylinder heads.

A460 Single Plane Intake Manifold

TFS-54400111 Manifold, single Holley 4500 Dominator-style carburetor, each

A460 Tunnel Ram Intake Manifold and Accessories

TFS-54494000 Manifold, lower only, each

TFS-54494001 Manifold top cover, for single Holley 4500 Dominator-style carburetor, each

TFS-54494140 Manifold top cover, for dual Holley 4500 Dominator-style carburetors, each

TFS-54494140-G Top cover replacement gasket, each

TFS-54494140-LK Linkage kit, for dual Holley 4500 Dominator-style carburetors, each



TFS-54400111



TFS-54494000



TFS-54494140

Track Heat® and R-Series Intake Manifolds for Ford 429/460

Trick Flow's Track Heat single plane intake manifolds for Ford 429/460 are designed for street/strip engines that operate in the 3,500-8,000 rpm range. Features include a high-rise, one-piece spider design with high-flow, extended individual runners, A319 aluminum construction, a raised plenum floor for increased flow velocity and fuel atomization, integral bosses for nitrous or fuel injection nozzles, and extra material for custom port work. The manifold is designed to use Holley 4150 and other square bore-style carbs. The overall height to the carburetor mounting pad is 6.800".

The Trick Flow R-Series single plane intake manifold is intended for 500-plus cubic inch, high-rpm engines using single Holley 4500 Dominator-style carbs. The manifold is a one-piece, spider-type design with high-flow extended runners and a raised plenum floor for a significant power boost. A319 aluminum construction, extra material for custom port work, and bosses for nitrous or fuel injection round out the features. Overall height to carburetor mounting pad is 6.800".

Track Heat Intake Manifold and Bolt Kit

TFS-53400111 Manifold, each

TFS-534INTBK Manifold bolt kit, fits Track Heat intake manifolds only, each

R-Series Intake Manifold

TFS-53400112 Manifold, each



TFS-53400111



TFS-53400112

Timing Chain Set • Rocker Arms • Girdles • Valve Covers for Ford 429/460

Ford 429/460

True Roller Timing Chain Set for Ford 429/460

This billet steel timing set from Trick Flow is engineered for durability and versatility. The .250" diameter, double-row true roller chain and black oxide-coated crank sprocket are heat-treated for unrivaled strength. The CNC-machined cam gear has nine crank sprocket keyways for zero and +/- 2°, 4°, 6°, or 8° timing adjustments. The timing marks are laser-etched.

TFS-53478530 Timing chain set, each



TFS-53411802

Cast Aluminum Valve Covers for Ford 429/460

Made from durable A319 aluminum, Trick Flow cast aluminum valve covers are much less prone to flex and distortion than stamped steel covers, which helps prevent oil leaks. The covers have a tall height (4 5/8" overall) to clear stud girdles and roller rockers, and can be drilled for breathers.

- TFS-53400802 Valve covers, silver, pair
- TFS-53411802 Valve covers, black, pair
- TFS-5340B802 Valve covers, natural, pair
- TFS-25200803 Hardware kit, includes fourteen 1/4"-20 x 3.000" studs, fourteen washers, and fourteen nuts, each

Roller Rocker Arms for Ford 429/460

These aluminum roller rockers are excellent for use with Trick Flow heads. They can also be used on factory Ford 429/460 heads. They feature heat-treated CNC-machined bodies, premium needle-bearing fulcrums, roller tips, and a machined relief for improved valve spring clearance. Trick Flow roller rockers are sold in sets of 16 and come complete with polylocks.

TFS-53400621 Rocker arms, 1.73 ratio, 7/16" studs, set of 16



Rocker Stud Girdles for Trick Flow PowerPort A460 Cylinder Heads

These CNC-machined stud girdles help control valve lift and timing changes due to stud flex, allowing more consistent high-rpm performance. Each stud girdle is anodized blue and comes with high-quality mounting hardware and hardened adjusting nuts. Tall-style valve covers are required.

TFS-54400700 Rocker stud girdles, 7/16", pair



Fabricated Valve Covers for Ford 429/460

These good-looking, tall height (3 7/8" overall) fabricated valve covers have an embossed Trick Flow logo and clear roller rockers and stud girdles. They're made from .084" thick aluminum to reduce engine weight and include the necessary fasteners to ensure a correct installation.

TFS-53400804 Valve covers, natural, pair



Main Stud Girdle for Ford 429/460

Trick Flow's bolt-on main girdle strengthens Ford's factory two-bolt main cap assembly. The girdles are made from tool steel, finished with black oxide, and come with ARP main cap bolts and a provision for an oil pump pickup tube hold down.

TFS-53400700 Stud girdle kit, each



Chrome Valve Covers for Ford 429/460

Trick Flow chrome plated valve covers provide a great alternative to higher-priced aluminum covers. They feature embossed Trick Flow logos and triple chrome plating for a long-lasting shine. New gaskets are included.

TFS-44003 Valve covers, pair

Hydraulic Lifters

Trick Flow hydraulic lifters are the perfect choice to freshen up your engine. These affordable lifters are designed to factory tolerances for a perfect fit and to provide precise oil control to keep your engine running smoothly. The retro-fit roller lifters are designed for a roller cam conversion in engines originally equipped with a hydraulic flat tappet cam.

Special length pushrods may be required.

Hydraulic Flat Tappet Lifters

TFS-21400001 Lifters, Chevy 262-454, set of 16

OEM Hydraulic Roller Lifters

TFS-21400002-16* Lifters, Chevy 5.0L/5.7L/GM LS Gen III, set of 16

TFS-21400004-16* Lifters, Ford 5.0L, set of 16

Retro-Fit Hydraulic Roller Lifters with Link Bars

TFS-21400003 Lifters, Chevy 262-400 and 348/409, set of 16

TFS-21400005 Lifters, Chevy 396-502, set of 16

TFS-21400006 Lifters, Ford 221-351W (including Boss), 351C/M-400, set of 16

TFS-21400007 Lifters, Ford 352-428, 370-460, set of 16

*Available individually.



TFS-21400001



Chromoly Pushrods

The proper length pushrod is critical to achieving correct valvetrain geometry. Trick Flow one-piece chromoly pushrods are available in a variety of lengths for use with any Trick Flow cylinder head as well as other OEM and aftermarket heads.

Designed specifically for high performance applications, the pushrods have the following features:

- Cold-formed from 4130 chromoly steel construction
- .080" wall thickness
- Induction-hardened heat-treating for use with guideplates



In addition, the oil hole is closed to within .040" then drilled and chamfered to .093". This eliminates stress fractures and cracks caused by the cold-forming process.

NOTE: Always check the proper pushrod length for the specific application before ordering.

Trick Flow Chromoly 5/16" Pushrods, Set of 16

TFS-21407200	Pushrods, 7.200" long, small block Chevy with OE roller cam
TFS-21407400	Pushrods, 7.400" long, GM 4.8L/5.3L, LS1, LS2, and L92
TFS-21407800	Pushrods, 7.800" long, small block Chevy, 90° V6
TFS-21408400	Pushrods, 8.400" long, 1970-74 Ford 351C/429CJ
TFS-21408500	Pushrods, 8.500" long, 1971-72 Ford Boss 351
TFS-21408550	Pushrods, 8.550" long, 1970-98 Ford 429/460 (except SCJ)
TFS-21408650	Pushrods, 8.650" long, Ford 429 SCJ
TFS-21408700	Pushrods, 8.700" long, Ford 429 SCJ +.050"
TFS-21408750	Pushrods, 8.750" long, Ford 429 SCJ +.100"

Trick Flow Chromoly 3/8" Pushrods, Set of 8


TFS-21418250-8	Pushrods, 8.250" long, big block Chevy intake
TFS-21418350-8	Pushrods, 8.350" long, big block Chevy intake +.100"
TFS-21418550-8	Pushrods, 8.550" long, 1970-98 Ford 429/460 (except SCJ)
TFS-21418650-8	Pushrods, 8.650" long, tall deck big block Chevy intake
TFS-21418700-8	Pushrods, 8.700" long, Ford 429 SCJ +.050"
TFS-21418750-8	Pushrods, 8.750" long, tall deck big block Chevy intake +.100"
TFS-21418750-8	Pushrods, 8.750" long, Ford 429 SCJ +.100"
TFS-21419250-8	Pushrods, 9.250" long, big block Chevy exhaust
TFS-21419350-8	Pushrods, 9.350" long, big block Chevy exhaust +.100"
TFS-21419650-8	Pushrods, 9.650" long, tall deck big block Chevy exhaust
TFS-21419750-8	Pushrods, 9.750" long, tall deck big block Chevy exhaust +.100"

How to Build a Pushrod Part Number

Trick Flow offers more pushrod lengths than shown here. They are available in any length from 6.250"–9.000" (5/16") or 7.650"–9.950" (3/8") in .050" increments by building a pushrod part number. Just add the length desired to the end of the part number code. Here's how:

To order 5/16" pushrods use the base number: TFS-2140____ and add the length. For example: TFS-21406250 designates 5/16" diameter, 6.250" pushrods.

To order 3/8" pushrods use the base number: TFS-2141____-8 and add the length. For example: TFS-21419000-8 designates 3/8" diameter, 9.000" pushrods.

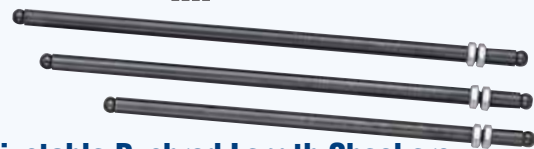

Adjustable Pushrod Length Checkers

These 5/16" pushrod checkers feature over 1" of travel to help determine proper pushrod length for any application. A must-have tool for setting proper valvetrain geometry, they're made from thinwall steel and have 5/16" ball ends.

TFS-9000	6.125" to 7.500" long, each
TFS-9001	7.500" to 8.700" long, each
TFS-9002	8.700" to 9.800" long, each
TFS-9003	9.700" to 11.000" long, each
TFS-9004	10.200" to 11.500" long, each
TFS-9005	7.200" to 8.300" cup style, each
TFS-9006	8.350" to 9.800" cup style, each
TFS-9007	10.200" to 11.800" cup style, each



TFS-90000




TFS-90100

Cam Degree and Supplement Kits

Trick Flow's camshaft degree kit will help dial in a camshaft accurately. In addition, the degree kit can be used to check piston-to-valve clearance, flywheel runout, crankshaft endplay, and ring gear backlash. The supplement kit includes two low-tension checking springs, wire pointer, top dead center stop, 11" black degree wheel with laser-etched marks, three adapter bushings (3/8", 7/16", and 1/2"), flat washer, magnetic base, dial indicator, and a carrying case.

The supplement kit contains components to make degreeding the cam in a vehicle easier: a steel plate for the magnetic base, an allen key, adjustable set-up lash adjuster, and an extension for the dial indicator is included. The supplement kit only works with the TFS-90000 cam degree kit.

TFS-90000	Cam degree kit, each
TFS-90000W	Degree wheel only, each
TFS-90100	Cam degree supplement kit, each
TFS-90100-BASE	Steel plate for magnetic base indicators, each
TFS-90100-BODY	Adjustable set-up lash adjuster, Ford 4.6L/5.4L 2V/4V, each
TFS-90100-EXT	Dial indicator extension, 4" long, 4-48 male threads, each

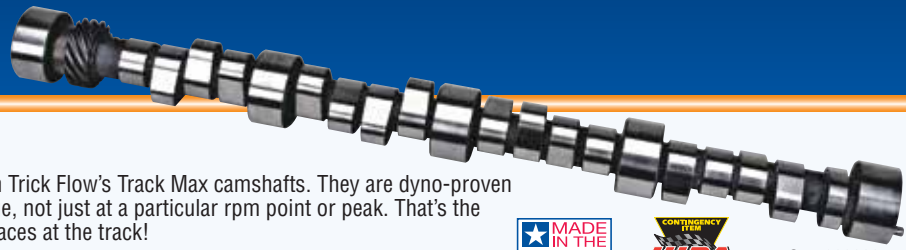

Track Max® Camshafts

Get significant horsepower and torque increases with Trick Flow's Track Max camshafts. They are dyno-proven to produce a wide power curve over the entire rpm range, not just at a particular rpm point or peak. That's the kind of power that gets respect on the street and wins races at the track!

The cams are cut from premium blank cores and checked for proper hardness before being precision ground to exact tolerances.



TFS-41302000

Track Max Hydraulic Roller Camshafts for GM LS

Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.7 Ratio Rocker Arms	Lobe Sep.	Recommended Valve Springs	Recommended Valve Spring Retainers	Recommended Valve Locks	Recommended Valve Spring Upgrade Kits
TFS-30602001	Applications: All GM LS engines. Street/strip; excellent idle, strong midrange power, 2,000-6,000 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	216°/220°	.560°/.560"	114°	TFS-16904-16 TFS-16306-16*	TFS-21400415 TFS-214T0425^	TFS-30600444	TFS-2500280 TFS-2500285^ TFS-2500295* TFS-2500300*^
TFS-30602002	Applications: All GM LS engines. Street/strip; good idle, strong midrange/top-end power, 2,500-6,300 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	220°/224°	.575°/.575"	112°	TFS-16904-16 TFS-16306-16*	TFS-21400415 TFS-214T0425^	TFS-30600444	TFS-2500280 TFS-2500285^ TFS-2500295* TFS-2500300*^
TFS-30602003	Applications: All GM LS engines. Street/strip; fair idle, good midrange/strong top-end power, 2,500-6,500 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	228°/230°	.585°/.585"	112°	TFS-16904-16 TFS-16306-16*	TFS-21400415 TFS-214T0425^	TFS-30600444	TFS-2500280 TFS-2500285^ TFS-2500295* TFS-2500300*^
TFS-30602004	Applications: All GM LS engines. Street/strip; fair idle, good midrange/strong top-end power, 3,000-7,000 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	238°/242°	.595°/.595"	112°	TFS-16904-16 TFS-16306-16*	TFS-21400415 TFS-214T0425^	TFS-30600444	TFS-2500280 TFS-2500285^ TFS-2500295* TFS-2500300*^
TFS-32603001	Applications: Optimized for GM LS3/L92 engines; works with all GM LS engines. Street/strip; fair idle, good midrange/strong top-end power, 3,000-7,000 rpm powerband, computer modification recommended. Compression: 10.5:1 minimum. With 3-bolt cam gear mounting and rear integral LS1/LS6 camshaft sensor pick-up ring.	230°/238°	.625°/.625"	113°	TFS-16904-16 TFS-16306-16*	TFS-21400415 TFS-214T0425^	TFS-30600444	TFS-2500280 TFS-2500285^ TFS-2500295* TFS-2500300*^

*Roller rocker arms recommended

^Titanium retainers

Track Max Hydraulic Roller Camshaft for GM LT1

Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.5 Ratio Rocker Arms	Lobe Sep.	Recommended Valve Springs	Recommended Valve Spring Retainers	Recommended Valve Locks	Recommended Valve Spring Upgrade Kits
TFS-31402081	Street/strip; fair idle, strong midrange power, 1,800-5,800 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 10.25:1 minimum.	220°/227°	.530°/.530"	113°	TFS-16838-16	TFS-51400423	TFS-31400443	TFS-K16838

Track Max Hydraulic Roller Camshafts for Small Block Chevrolet

Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.5 Ratio Rocker Arms	Lobe Sep.	Recommended Valve Springs	Recommended Valve Spring Retainers	Recommended Valve Locks	Recommended Valve Spring Upgrade Kits
TFS-31402001	Street/strip; fair idle, broad midrange power, 2,800-6,200 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum.	230°/234°	.528°/.539"	110°	TFS-16838-16	TFS-51400423	TFS-31400443	TFS-K16838
TFS-31403001	Street/strip; fair idle, broad midrange power, 2,800-6,300 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum. For use in 1987-95 OEM hydraulic roller cam engines only.	230°/234°	.530°/.540"	110°	TFS-16838-16	TFS-51400423	TFS-31400443	TFS-K16838
TFS-31402002	Race; rough idle, excellent top-end power, 3,200-6,800 rpm powerband. 3,000-3,500 rpm stall converter. Compression: 10:1 minimum.	246°/254°	.558°/.558"	112°	TFS-16921-16	TFS-21400410	TFS-31400443	TFS-2500200

Track Max Hydraulic Flat Tappet Camshaft and Camshaft/Lifter Kits for Small Block Chevrolet

Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.5 Ratio Rocker Arms	Lobe Sep.	Recommended Valve Springs	Recommended Valve Spring Retainers	Recommended Valve Locks	Recommended Valve Spring Upgrade Kits
TFS-31401000* TFS-K31401000^	Street; good idle, strong low-end torque, 2,200-5,700 rpm powerband. Small tube headers and low-restriction exhaust recommended. Compression: 9:1 minimum.	212°/214°	.443°/.449"	110°	TFS-16942-16	TFS-51400423	TFS-31400443	TFS-K16942
TFS-31401001* TFS-K31401001^	Street/strip; fair idle, strong midrange power, 2,600-6,100 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum.	226°/234°	.480°/.495"	110°	TFS-16981-16	TFS-51400423	TFS-31400443	TFS-K16981
TFS-31401002* TFS-K31401002^	Street/strip; rough idle, excellent top-end power, 3,500-6,700 rpm powerband. 3,000-3,500 rpm stall converter. Compression: 10:1 minimum.	246°/254°	.510°/.518"	112°	TFS-16838-16	TFS-51400423	TFS-31400443	TFS-K16838

*Camshaft only

^Kit

Track Max® Camshafts (continued)

Track Max Hydraulic Roller Camshaft for Big Block Chevrolet								
Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.7 Ratio Rocker Arms	Lobe Sep.	Recommended Valve Springs	Recommended Valve Spring Retainers	Recommended Valve Locks	Recommended Valve Spring Upgrade Kits
TFS-41302000	Street/strip; fair idle, good midrange and strong top-end power, 3,000-6,200 rpm powerband. 2,500-3,000 rpm stall converter. Compression: 9.5:1 minimum.	236°/242°	.600°/.600°	112°	TFS-16943-16	TFS-21400425	TFS-52400444	TFS-K16943

Track Max Hydraulic Roller Camshafts for Ford 4.6L/5.4L 2V								
Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.7 Ratio Rocker Arms	Lobe Sep.	Recommended Valve Springs	Recommended Valve Spring Retainers	Recommended Valve Locks	Recommended Valve Spring Upgrade Kits
TFS-51802001	Street/strip; fair idle, strong midrange power and torque, 1,500-5,000 rpm powerband. Works with stock PI heads or Trick Flow Twisted Wedge® Series 185 heads; tuning recommended for maximum performance. Piston-to-valve clearance measurement recommended. Compression: stock.	228°/230°	.550°/.550°	112°	TFS-16519-16	TFS-51900423	TFS-51900444	TFS-2500500 TFS-2500525*
TFS-51802002	Street/strip; fair idle, strong mid to top-end power, 1,800-6,500 rpm powerband. Works with stock PI heads or Trick Flow Twisted Wedge Series 185 heads; tuning recommended for maximum performance. 3.73 or numerically higher gear. Piston-to-valve clearance measurement required. Compression: stock minimum.	234°/234°	.580°/.580°	114°	TFS-16519-16	TFS-51900423	TFS-51900444	TFS-2500500 TFS-2500525*

*Roller rocker arms required

Track Max Hydraulic Roller Camshafts for Small Block Ford								
Part Number	Characteristics	Duration @ .050"	Valve Lift w/1.6 Ratio Rocker Arms	Lobe Sep.	Recommended Valve Springs	Recommended Valve Spring Retainers	Recommended Valve Locks	Recommended Valve Spring Upgrade Kits
TFS-51403001	Street; good idle, strong midrange power. Aftermarket intake, heads, and headers recommended. Calibrated mass airflow meter required. Compression: 9:1 minimum.	221°/225°	.499°/.510°	112°	TFS-16315-16	TFS-21400424	TFS-31400443	TFS-2500200
TFS-51403002	Street/strip; fair idle, good midrange power, 2,500-3,000 rpm stall converter or 5-speed transmission. 3.55 or numerically higher gears. Calibrated mass airflow meter required. Compression: 9.5:1 minimum.	224°/232°	.542°/.563°	112°	TFS-16315-16	TFS-21400424	TFS-31400443	TFS-2500200
TFS-51403003	Race; rough idle, strong top-end power, 3,000-3,500 rpm stall converter. 3.90-4.11 gears. Calibrated mass airflow meter required. Compression: 10:1 minimum.	236°/248°	.574°/.595°	110°	TFS-16306-16	TFS-21400125	TFS-51400444	TFS-K16306
TFS-51403004	Race; rough idle, strong top-end power, 3,000-3,500 rpm stall converter. 3.90-4.11 gears. Calibrated mass airflow meter required. Compression: 10:1 minimum. 7,000 maximum rpm.	242°/246°	.595°/.595°	110°	TFS-16306-16	TFS-21400125	TFS-51400444	TFS-K16306
TFS-51403005	Race; rough idle, strong top-end power, 3,000-3,500 rpm stall converter. 3.90-4.11 gears. Calibrated mass airflow meter required. Compression: 10:1 minimum. 7,200 maximum rpm.	250°/254°	.595°/.595°	110°	TFS-16306-16	TFS-21400125	TFS-51400444	TFS-K16306



Camshaft Installation Handle

Trick Flow's patented camshaft installation handle* makes installing and removing cams much easier. It features an innovative U-shape design for more leverage when you need it most and a cushioned handle for comfort. The handle is 8" long and includes a universal mounting pattern to fit all types of camshafts, plus a protective zinc finish to protect it against corrosion.

TFS-90150 Camshaft installation handle, each

*This product is protected under U.S. patent number D664,017.



TFS-90518



TFS-90306

Valve Spring Compressors

If you work on engines, then you need a Trick Flow valve spring compressor. A must for servicing valve springs, retainers, and valve seals, our specially made tools easily remove valve springs—even while they're on the engine and still in the vehicle. The compressors are made from premium heat-treated steel for a long service life.

TFS-90306 Valve spring compressor, GM LS1/LS6/LS2, each
 TFS-90307 Valve spring compressor, GM L92/LS3/L99/LS9, each
 TFS-90518 Valve spring compressor, Ford 4.6L/5.4L 2V/4V, each

Trick Flow by PAC Racing Valve Springs



Single with Damper



Dual



Dual with Damper



Triple Sportsman



Beehive

Trick Flow by PAC Racing Valve Springs

Valve springs compress and rebound hundreds of times a second. Make sure your next set of valve springs are built to last and built to win! Trick Flow by PAC Racing valve springs are the only springs manufactured to Trick Flow's rigorous, world-class testing standards. Every spring is CNC-coiled from high tensile-strength, extra-durable Pacaloy™ chrome-silicon steel and double shot-peened beyond Aerospace Material Specifications (AMS) reliability standards.

The Trick Flow by PAC Racing valve springs are available in four configurations to work with virtually any camshaft and valvetrain combination.

Sold in sets of 16, except for TFS-15410-24 (set of 24) and TFS-15411-32 (set of 32).

Single Valve Springs

Trick Flow by PAC Racing single valve springs have flat internal damping coils to prevent spring surge at high revs, maintaining proper spring pressure at critical load levels.

Dual Valve Springs

Trick Flow by PAC Racing dual valve springs are for more aggressive cam profiles. Choose the standard dual springs, or the dual springs with damper coils for spring surge prevention.

Triple Sportsman Valve Springs

Trick Flow by PAC Racing triple sportsman springs are designed for bracket drag racing, with higher spring rates to withstand ultra high-revving, high-horsepower engines.

Beehive Valve Springs

Drop in a more aggressive cam without machining your spring seats! Trick Flow by PAC Racing beehive springs have heavyweight spring rates but will fit inside the stock valve seats and can be used with the stock retainers.



Trick Flow by PAC Racing Single Valve Springs (with internal damping coils)

Specifications								Recommended Components			
Part Number	O.D. of Outer Spring (in.)	I.D. of Outer Spring (in.)	I.D. of Inner Spring (in.)	Seat Load (Lbs./in.)	Open Load (Lbs./in.)	Coil Bind (in.)	Rate (Lbs./in.)	Valve Spring Retainers (Chromoly Steel)	Valve Stem Locks	Valve Spring Upgrade Kits	Application Recommendations
TFS-16314-16	1.250	.870	.780	110 @ 1.780	300 @ 1.280	1.180	360	TFS-31400423	TFS-31400443	—	Replacement for Super 23® cylinder heads for small block Chevrolet
TFS-16981-16	1.254	.880	.790	110 @ 1.700	300 @ 1.250	1.150	422	TFS-31400423	TFS-31400443	TFS-K16981	Up to .500" lift @ 1.700" installed height
TFS-16941-16	1.244	.860	.770	125 @ 1.750	350 @ 1.250	1.150	450	TFS-31400423	TFS-51400444	—	Up to .600" lift @ 1.800" installed height
TFS-16848-16	1.255	.871	.781	110 @ 1.700	311 @ 1.200	1.150	402	TFS-31400423	TFS-31400443	—	Up to .500" lift @ 1.700" installed height
TFS-16846-16	1.265	.865	.765	125 @ 1.750	388 @ 1.250	1.150	526	TFS-31400423	TFS-51400444	—	Up to .600" lift @ 1.800" installed height
TFS-16910-16	1.355	.940	.851	90 @ 1.850	300 @ 1.350	1.204	418	TFS-21400410	TFS-31400443	—	Up to .550" lift @ 1.850" installed height
TFS-16984-16	1.430	1.066	.976	110 @ 1.750	225 @ 1.250	1.125	230	TFS-51400423	TFS-31400443	—	Up to .600" lift @ 1.800" installed height
TFS-16942-16	1.437	1.037	.947	115 @ 1.700	285 @ 1.200	1.150	340	TFS-51400423	TFS-31400443	TFS-K16942	Up to .500" lift @ 1.700" installed height
TFS-16990-16	1.437	1.073	1.003	115 @ 1.500	240 @ 1.030	.903	266	TFS-51400423	TFS-31400443	TFS-K16990	Up to .500" lift @ 1.500" installed height
TFS-16840-16	1.460	1.060	.970	92 @ 1.580	296 @ 1.100	1.050	425	TFS-51400423	TFS-30600444	—	Up to .500" lift @ 1.580" installed height
TFS-16972-16	1.460	1.060	.970	109 @ 1.850	293 @ 1.250	1.146	307	TFS-51400423	TFS-31400443	TFS-K16972	Up to .600" lift @ 1.850" installed height
TFS-16940-16	1.464	1.080	.990	95 @ 1.900	236 @ 1.300	1.189	235	TFS-51400423	TFS-31400443	—	Up to .600" lift @ 1.900" installed height
TFS-16926-16	1.476	1.062	.972	110 @ 1.800	318 @ 1.300	1.167	416	TFS-51400423	TFS-31400443	TFS-K16926	Up to .550" lift @ 1.800" installed height
TFS-16514-16	1.488	1.066	.976	118 @ 1.800	333 @ 1.200	1.040	358	TFS-51400423	TFS-31400443	—	Replacement for Twisted Wedge® 170, 185, 190, and 205 cylinder heads for small block Ford
TFS-16901-16	1.495	1.081	.991	101 @ 1.650	253 @ 1.220	1.100	355	TFS-51400423	TFS-31400443	—	Up to .450" lift @ 1.650" installed height
TFS-16839-16	1.500	1.086	.996	98 @ 1.880	316 @ 1.300	1.115	376	TFS-51400423	TFS-31400443	TFS-K16839	Up to .600" lift @ 1.880" installed height
TFS-16911-16	1.525	1.110	1.000	127 @ 1.900	311 @ 1.400	1.110	368	TFS-21400425	TFS-52400444	TFS-K16911	Up to .600" lift @ 1.900" installed height
TFS-16936-16	1.540	1.125	1.016	145 @ 1.900	320 @ 1.338	1.200	311	TFS-21400425	TFS-52400444	—	Up to .600" lift @ 1.900" installed height

Trick Flow by PAC Racing Valve Springs (continued)

Trick Flow by PAC Racing Dual Valve Springs												
Specifications									Recommended Components			
Part Number	O.D. of Outer Spring (In.)	I.D. of Outer Spring (In.)	I.D. of Inner Spring (In.)	Includes Damper	Seat Load (Lbs./In.)	Open Load (Lbs./In.)	Coil Bind (In.)	Rate (Lbs./In.)	Valve Spring Retainers (Chromoly Steel)	Valve Stem Locks	Valve Spring Upgrade Kits	Application Recommendations
TFS-16521-16	1.100	.816	.620	No	150 @ 1.500	290 @ .900	.850	233	TFS-52900424	TFS-52900450	—	Twisted Wedge® Race 195 cylinder heads for Ford 4.6L/5.4L 2V
TFS-16891-16	1.112	.900	.674	No	97 @ 1.516	256 @ .970	.850	291	TFS-31400423	TFS-31400443	TFS-K16891	Buick V6 and 350 cubic inch; up to .550" lift @ 1.500" installed height
TFS-16904-16	1.265	.891	.675	No	140 @ 1.800	380 @ 1.200	1.064	400	TFS-21400415 TFS-214T0415*	TFS-30600444	TFS-2500280 TFS-2500285*	OEM GM LS upgrade; replacement for Trick Flow GenX® LS cylinder heads
TFS-16306-16	1.295	.891	.686	No	150 @ 1.800	438 @ 1.200	1.100	448	TFS-21400415 TFS-214T0415*	TFS-30600444	TFS-2500295 TFS-2500300*	Trick Flow GenX® LS cylinder heads with roller rocker arms
TFS-16921-16	1.300	.895	.655	No	135 @ 1.800	400 @ 1.150	1.110	408	TFS-21400410	TFS-31400443	—	Up to .650" lift @ 1.800" installed height
TFS-16893-16	1.459	1.075	.794	No	120 @ 1.875	394 @ 1.175	1.050	391	TFS-51400423	TFS-31400443	TFS-K16893	Up to .700" lift @ 1.875" installed height
TFS-16315-16	1.460	1.074	.720	Yes	145 @ 1.750	364 @ 1.250	1.100	438	TFS-51400423	TFS-31400443	—	Replacement for Trick Flow Super 23® cylinder heads for small block Chevrolet and Twisted Wedge® cylinder heads for small block Ford
TFS-16534-16	1.460	1.075	.803	Yes	120 @ 1.900	394 @ 1.175	1.100	390	TFS-51400423	TFS-31400443	—	Replacement for Trick Flow PowerPort® 290 and 325 cylinder heads for Ford 429/460
TFS-16950-16	1.464	1.080	.724	Yes	133 @ 1.900	333 @ 1.300	1.198	333	TFS-51400423	TFS-31400443	—	Up to .600" lift @ 1.900" installed height
TFS-16838-16	1.465	1.090	.807	No	106 @ 1.688	306 @ 1.208	.906	417	TFS-51400423	TFS-31400443	TFS-K16838	Up to .650" lift @ 1.688" installed height
TFS-16914-16	1.490	1.105	.810	No	165 @ 1.800	385 @ 1.200	1.073	367	TFS-51400423	TFS-31400443	—	Up to .600" lift @ 1.900" installed height
TFS-16929-16	1.538	1.140	.752	Yes	157 @ 1.850	440 @ 1.200	1.090	436	TFS-51400423	TFS-52400444	—	Up to .650" lift @ 1.850" installed height
TFS-16097-16	1.539	1.125	.731	Yes	200 @ 2.000	550 @ 1.300	1.125	500	TFS-21400425	TFS-52400444	—	Up to .700" lift @ 2.000" installed height
TFS-16927-16	1.539	1.125	.731	Yes	200 @ 1.950	550 @ 1.250	1.125	500	TFS-21400425	TFS-52400444	—	Up to .700" lift @ 1.950" installed height
TFS-16886-16	1.540	1.105	.700	Yes	225 @ 2.000	715 @ 1.250	1.150	653	TFS-21400424	TFS-52400445	—	Up to .750" lift @ 2.000" installed height
TFS-16895-16	1.540	1.140	.754	Yes	144 @ 1.900	403 @ 1.300	1.125	431	TFS-21400425	TFS-52400444	—	Up to .650" lift @ 1.900" installed height
TFS-16896-16	1.540	1.140	.754	Yes	145 @ 1.900	465 @ 1.250	1.130	492	TFS-21400425	TFS-52400444	—	Up to .650" lift @ 1.900" installed height
TFS-16094-16	1.545	1.130	.757	Yes	175 @ 1.900	442 @ 1.275	1.190	427	TFS-21400425	TFS-52400444	—	Replacement for Trick Flow Super 23® 215 and 230 cylinder heads for small block Chevrolet; up to .625" lift @ 1.900" install height
TFS-16112-16	1.545	1.130	.737	Yes	140 @ 1.800	457 @ 1.175	1.130	507	TFS-21400425	TFS-52400444	—	Up to .625" lift @ 1.800" install height
TFS-16089-16	1.550	1.135	.812	No	230 @ 2.000	580 @ 1.300	1.190	500	TFS-21400425	TFS-52400444	—	Up to .700" lift @ 2.000" installed height
TFS-16115-16	1.550	1.125	.720	Yes	220 @ 2.050	625 @ 1.300	1.190	540	TFS-21400425	TFS-52400444	—	Up to .750" lift @ 2.050" installed height
TFS-16928-16	1.550	1.150	.790	Yes	160 @ 1.880	389 @ 1.250	1.140	363	TFS-21400425	TFS-52400444	—	Up to .650" lift @ 1.880" installed height
TFS-16943-16	1.550	1.135	.812	No	240 @ 1.900	625 @ 1.200	1.068	550	TFS-21400425	TFS-52400444	TFS-K16943	Up to .700" lift @ 1.900" installed height
TFS-16955-16	1.550	1.135	.812	No	240 @ 2.000	608 @ 1.300	1.190	525	TFS-21400425	TFS-52400444	—	Up to .700" lift @ 2.000" installed height
TFS-16324-16	1.550	1.136	.750	Yes	215 @ 1.950	550 @ 1.270	1.100	460	TFS-21400425	TFS-52400444	—	Replacement for Trick Flow Super 23® 215 and 230 cylinder heads for small block Chevrolet
TFS-16935-16	1.555	1.140	.747	Yes	194 @ 1.950	500 @ 1.300	1.150	469	TFS-21400425	TFS-52400444	—	Up to .700" lift @ 1.950" installed height
TFS-16318-16	1.560	1.136	.750	Yes	240 @ 2.000	600 @ 1.280	1.100	500	TFS-214T0525*	TFS-52400445	—	Replacement for Trick Flow Ultra 18® 250 cylinder heads for small block Chevrolet and Twisted Wedge® Race cylinder heads for small block Ford
TFS-16944-16	1.570	1.120	.796	No	190 @ 1.950	710 @ 1.250	1.045	742	TFS-21400425	TFS-52400444	—	Up to .800" lift @ 1.950" installed height
TFS-16951-16	1.620	1.170	.846	No	230 @ 1.950	710 @ 1.200	1.045	640	TFS-214T0520*	TFS-52400444	—	Up to .800" lift @ 1.950" installed height
TFS-16099-16	1.625	1.175	.769	Yes	250 @ 2.050	673 @ 1.300	1.211	564	TFS-214T0520*	TFS-52400444	—	Up to .750" lift @ 2.050" installed height
TFS-16998-16	1.635	1.185	.779	Yes	250 @ 1.900	728 @ 1.200	1.090	682	TFS-214T0520*	TFS-52400444	—	Up to .700" lift @ 1.900" installed height
TFS-16414-16	1.640	1.191	.860	Yes	250 @ 2.000	800 @ 1.150	1.050	650	TFS-214T0520*	TFS-52400444	—	Replacement for Trick Flow PowerPort® 320 and 360 cylinder heads for big block Chevrolet
TFS-16959-16	1.645	1.195	.871	No	207 @ 2.050	671 @ 1.250	1.130	580	TFS-214T0620*	TFS-52400444	—	Up to .800" lift @ 2.050" installed height

*Titanium retainers

Trick Flow by PAC Racing Valve Springs (continued)

Trick Flow by PAC Racing Triple Sportsman Valve Springs										
Specifications								Recommended Components		
Part Number	O.D. of Outer Spring (In.)	I.D. of Outer Spring (In.)	I.D. of Inner Spring (In.)	Seat Load (Lbs./In.)	Open Load (Lbs./In.)	Coil Bind (In.)	Rate (Lbs./In.)	Valve Spring Retainers (Titanium)	Valve Stem Locks	Application Recommendations
TFS-16946-16	1.645	1.195	.635	250 @ 2.050	801 @ 1.200	1.130	688	TFS-214T0630	TFS-52400444	Up to .750" lift @ 2.050" installed height
TFS-16947-16	1.645	1.195	.635	290 @ 2.070	835 @ 1.270	1.130	688	TFS-214T0630	TFS-52400444	Up to .850" lift @ 2.070" installed height
TFS-16948-16	1.645	1.195	.635	332 @ 2.100	950 @ 1.200	1.130	688	TFS-214T0630	TFS-52400444	Big block Chevrolet and Chrysler with mechanical roller camshafts; up to .900" lift @ 2.100" installed height

Trick Flow by PAC Racing Beehive Valve Springs										
Specifications							Recommended Components			
Part Number	O.D. of Outer Spring* (In.)	I.D. of Outer Spring* (In.)	Seat Load (Lbs./In.)	Open Load (Lbs./In.)	Coil Bind (In.)	Rate (Lbs./In.)	Valve Spring Retainers (Chromoly Steel)	Valve Stem Locks	Valve Spring Upgrade Kits	Application Recommendations
TFS-16801-32	T: .862 B: 1.025	T: .537 B: .700	80 @ 1.575	200 @ 1.000	.943	209	Use factory retainers	Use factory locks	—	Ford 5.0L DOHC 4V with OEM VVT; up to .575" lift
TFS-15411-32	T: .873 B: 1.061	T: .510 B: .698	115 @ 1.600	300 @ 1.000	.960	308	Use factory retainers	Use factory locks	—	Ford 5.0L DOHC 4V with locked-out VVT; up to .600" lift
TFS-15410-24	T: .930 B: 1.025	T: .567 B: .662	105 @ 1.670	270 @ 1.120	1.060	300	Use factory retainers	TFS-51900444	—	Ford 4.6L/5.4L 3V; up to .550" lift @ 1.670"
TFS-16519-16	T: .940 B: 1.050	T: .640 B: .750	90 @ 1.600	205 @ 1.020	.980	209	TFS-51900423	TFS-51900444	TFS-2500525	Ford 4.6L/5.4L 2V; up to .580" lift @ 1.600"
TFS-16123-32	T: .943 B: 1.105	T: .580 B: .742	90 @ 1.470	252 @ 0.970	.900	324	TFS-21400309	TFS-51900444	—	Ford 4.6L/5.4L 4V
TFS-16213-16	T: .959 B: 1.061	T: .636 B: .738	80 @ 1.640	185 @ 1.090	1.020	191	TFS-51900423	TFS-51900444	—	Ford 4.6L/5.4L 2V
TFS-16213-24	T: .959 B: 1.061	T: .636 B: .738	80 @ 1.640	185 @ 1.090	1.020	191	Use factory retainers	Use factory locks	—	Ford 4.6L/5.4L 3V
TFS-16125-16	T: 1.013 B: 1.101	T: .650 B: .738	125 @ 1.570	275 @ 1.020	.970	258	TFS-51900423	TFS-51900444	TFS-2500525	Ford 4.6L/5.4L 2V; up to .550" lift @ 1.570"
TFS-16125-24	T: 1.013 B: 1.101	T: .650 B: .738	120 @ 1.570	275 @ 1.020	.970	258	TFS-51900423	TFS-51900444	—	Ford 4.6L/5.4L 3V; up to .550" lift @ 1.570"
TFS-16125-32	T: 1.013 B: 1.101	T: .650 B: .738	120 @ 1.570	275 @ 1.020	.970	258	TFS-51900423	TFS-51900444	—	Ford 4.6L/5.4L 4V; up to .550" lift @ 1.570"
TFS-16235-16	T: 1.035 B: 1.210	T: .630 B: .805	135 @ 1.800	350 @ 1.200	1.160	408	Use factory retainers	Use factory locks	—	No machining required for small block Chrysler; up to .600" lift @ 1.800" installed height
TFS-16915-16	T: 1.055 B: 1.290	T: .650 B: .885	105 @ 1.800	293 @ 1.200	1.140	313	Use factory retainers	Use factory locks	—	Upgrade for GM LS and small block Chevrolet with up to .610" lift
TFS-16918-16	T: 1.055 B: 1.290	T: .650 B: .885	130 @ 1.800	318 @ 1.200	1.140	313	Use factory retainers	Use factory locks	—	Upgrade for GM LS and small block Chevrolet with up to .610" lift
TFS-16120-16	T: 1.095 B: 1.445	T: .650 B: 1.000	155 @ 1.880	377 @ 1.280	1.210	370	7": TFS-21400310 10": TFS-21400307	7": TFS-51400444 10": TFS-52400444	—	Small block Ford; big block Buick, Chevrolet, and Ford
TFS-16841-16	T: 1.295 B: 1.450	T: .859 B: 1.014	120 @ 1.940	375 @ 1.380	1.316	455	Use factory retainers	Use factory locks	—	1985-95 small block Ford; up to .560" lift @ 1.940" installed height
TFS-16982-16	T: 1.454 B: 1.250	T: 1.071 B: .880	100 @ 1.750	230 @ 1.250	1.100	362	TFS-51400423	TFS-31400443	—	Up to .550" lift @ 1.750" installed height

*I.D./O.D.: T=Top, B=Bottom

Trick Flow Fast Fact: Compression Ratio

The proper compression ratio is crucial to engine performance. Too high and the engine will detonate, with loss of power and reduced life. Too low and the engine will won't perform to its full potential.

Compression ratio is affected by piston design (dome, flat top, or dish), head gasket thickness, cylinder head volume, and cylinder bore diameter. For example, a 302 c.i.d. engine with 67cc combustion chamber cylinder heads has a compression ratio of 9.15:1. Keeping all of the variables the same but altering the stroke to 3.480" increases compression ratio to 10.45:1 and increases displacement to 350 c.i.d. Going one step further, increasing the stroke to 3.750" increases compression ratio to 11.2:1 and displacement to 383 c.i.d.

Automotive Formulas

$$\text{Horsepower} = (\text{Torque} \times \text{RPM}) / 5252$$

$$\text{Torque} = (\text{Horsepower} \times 5252) / \text{RPM}$$

$$\text{Cubic Inch Displacement (c.i.d.)} = \text{Bore} \times \text{Bore} \times .7854 \times \text{Stroke} \times \text{Number of Cylinders}$$

$$\text{Compression Ratio} = (\text{Compressed Volume} + \text{Swept Volume}) / \text{Compressed Volume}$$

$$\text{Compressed Volume} = (\text{Chamber Volume} - \text{Dome Volume} + \text{Deck Clearance Volume} + \text{Gasket Volume}) \times .061$$

$$\text{Swept Volume} = (3.14159 \times \text{Stroke} \times \text{Bore} \times \text{Bore}) / 4$$

Call the Trick Flow Technical Department today (1-330-630-1555, Monday through Friday from 9:00 am to 5:00 pm EST). The best consultants in the business will help you design the perfect engine combination for your performance goals.



TFS-K16943

Trick Flow by PAC Racing Performance Valve Spring Upgrade Kits

Installing a new camshaft is a sure way to improve horsepower—just remember that the rest of the valvetrain must be upgraded to support it. These Trick Flow by PAC Racing performance valve spring upgrade kits include the components you need to keep your engine running in tip-top shape after a cam swap. Each kit features high-quality Trick Flow by PAC Racing Pacaloy™ valve springs, hardened chromoly steel or titanium retainers, and precision machined steel valve locks.

Trick Flow by PAC Racing Performance Valve Spring Upgrade Kits

Kit Part Number	Spring Part Number	Spring Style	Seat Load (Lbs./In.)	Open Load (Lbs./In.)	Coil Bind (In.)	Rate (Lbs./In.)	Valve Spring Retainers (Chromoly Steel)	Valve Stem Locks	Lock Type	Max. Lift (In.)	Application Recommendations
TFS-2500100	TFS-16514-16	Single	115 @ 1.800	315 @ 1.200	1.100	333	TFS-21400424	TFS-31400443	7°, 11/32"	.540	OEM Ford 289-351W cast iron cylinder heads
TFS-2500200	TFS-16315-16	Dual	145 @ 1.750	364 @ 1.250	1.100	438	TFS-51400423	TFS-52400444	10°	.600	Upgrade Trick Flow Twisted Wedge® 170 heads to optional high lift cam specifications
TFS-2500280	TFS-16904-16	Dual	140 @ 1.800	380 @ 1.200	1.064	400	TFS-21400415	TFS-30600444	7°, 8mm	.650	OEM GM LS cylinder heads; chromoly retainers
TFS-2500285	TFS-16904-16	Dual	140 @ 1.800	380 @ 1.200	1.064	400	TFS-214T0425*	TFS-30600444	7°, 8mm	.650	OEM GM LS cylinder heads; titanium retainers
TFS-2500286	TFS-16905-16	Dual	160 @ 1.800	425 @ 1.130	1.050	392	TFS-21400415	TFS-30600444	7°, 8mm	.660	OEM GM LS cylinder heads; chromoly retainers
TFS-2500287	TFS-16905-16	Dual	160 @ 1.800	425 @ 1.130	1.050	392	TFS-214T0425*	TFS-30600444	7°, 8mm	.660	OEM GM LS cylinder heads; titanium retainers
TFS-2500289	TFS-16905-16	Dual	160 @ 1.800	425 @ 1.130	1.050	392	TFS-214T0427*	TFS-30600444	7°, 8mm	.660	OEM GM LS9 cylinder heads; titanium retainers
TFS-2500295	TFS-16306-16	Dual	150 @ 1.800	438 @ 1.200	1.100	448	TFS-21400415	TFS-30600444	7°, 8mm	.650	OEM GM LS cylinder heads; chromoly retainers
TFS-2500300	TFS-16306-16	Dual	151 @ 1.800	439 @ 1.200	1.100	449	TFS-214T0425*	TFS-30600445	7°, 8mm	.650	OEM GM LS cylinder heads; titanium retainers
TFS-2500301	TFS-16917-16	Dual	155 @ 1.800	436 @ 1.150	1.000	433	TFS-214T0425*	TFS-30600444	7°, 8mm	.700	OEM GM LS cylinder heads; titanium retainers, .505" I.D. locators
TFS-2500302	TFS-16917-16	Dual	155 @ 1.800	436 @ 1.150	1.000	433	TFS-214T0425*	TFS-30600444	7°, 8mm	.700	OEM GM LS cylinder heads; titanium retainers, .570" I.D. locators
TFS-2500305	TFS-16208-16	Dual	160 @ 1.800	482 @ 1.100	1.000	460	TFS-214T0425*	TFS-30600444	7°, 8mm	.750	OEM GM LS cylinder heads; titanium retainers, .505" I.D. locators
TFS-2500306	TFS-16208-16	Dual	160 @ 1.800	482 @ 1.100	1.000	460	TFS-214T0425*	TFS-30600444	7°, 8mm	.750	OEM GM LS cylinder heads; titanium retainers, .570" I.D. locators
TFS-2500400	TFS-16921-16	Dual	135 @ 1.800	400 @ 1.200	1.100	442	TFS-214T0410	TFS-30600444	7°, 8mm	.700	Trick Flow GenX® LS cylinder heads; titanium retainers
TFS-2500500	TFS-16519-16	Beehive	90 @ 1.600	205 @ 1.020	.980	209	TFS-51900423	TFS-51900444	7mm, triple groove	.600	Ford 4.6L/5.4L 2V, street/strip, naturally aspirated engines
TFS-2500525	TFS-16125-16	Beehive	125 @ 1.570	275 @ 1.020	.970	258	TFS-51900423	TFS-51900444	7mm, triple groove	.580	Ford 4.6L/5.4L 2V, race, forced induction engines
TFS-2500526	TFS-16521-16	Dual	150 @ 1.500	290 @ .900	.850	233	TFS-52900423	TFS-51900445	7mm, triple groove	.650	Ford 4.6L/5.4L 2V and Twisted Wedge® 185 cylinder heads
TFS-K16306	TFS-16306-16	Dual	150 @ 1.800	438 @ 1.200	1.100	448	TFS-21400125	TFS-51400444	7°, 11/32"	.650	Up to .650" lift @ 1.800" installed height
TFS-K16838	TFS-16838-16	Dual	106 @ 1.688	306 @ 1.208	.960	417	TFS-51400423	TFS-31400443	7°, 11/32"	.650	Up to .650" lift @ 1.688" installed height
TFS-K16839	TFS-16839-16	Single	98 @ 1.880	316 @ 1.300	1.115	376	TFS-51400423	TFS-31400443	7°, 11/32"	.600	Up to .600" lift @ 1.880" installed height
TFS-K16891	TFS-16891-16	Dual	97 @ 1.516	256 @ .970	.850	291	TFS-31400423	TFS-31400443	7°, 11/32"	.550	Buick V6 and 350 cubic inch; up to .550" lift with 1.500" installed height
TFS-K16893	TFS-16893-16	Dual	120 @ 1.875	394 @ 1.175	1.050	391	TFS-51400423	TFS-31400443	7°, 11/32"	.700	Up to .700" lift @ 1.875" installed height
TFS-K16911	TFS-16911-16	Single	127 @ 1.900	311 @ 1.400	1.110	368	TFS-21400425	TFS-52400444	10°, 11/32"	.600	Up to .600" lift @ 1.900" installed height
TFS-K16926	TFS-16926-16	Single	110 @ 1.800	318 @ 1.300	1.167	416	TFS-51400423	TFS-31400443	7°, 11/32"	.550	Up to .550" lift @ 1.800" installed height
TFS-K16942	TFS-16942-16	Single	115 @ 1.700	285 @ 1.200	1.150	340	TFS-51400423	TFS-31400443	7°, 11/32"	.500	Up to .500" lift @ 1.700" installed height
TFS-K16943	TFS-16943-16	Dual	240 @ 1.900	625 @ 1.200	1.068	550	TFS-21400425	TFS-52400444	10°, 11/32"	.700	Up to .700" lift @ 1.900" installed height
TFS-K16972	TFS-16972-16	Single	109 @ 1.850	293 @ 1.250	1.146	307	TFS-51400423	TFS-31400443	7°, 11/32"	.600	Up to .600" lift @ 1.850" installed height
TFS-K16981	TFS-16981-16	Single	110 @ 1.700	300 @ 1.250	1.150	422	TFS-31400423	TFS-31400443	7°, 11/32"	.500	Up to .500" lift @ 1.700" installed height
TFS-K16990	TFS-16990-16	Single	115 @ 1.500	240 @ 1.030	.930	266	TFS-51400423	TFS-31400443	7°, 11/32"	.500	Up to .500" lift @ 1.500" installed height

*Titanium retainers

Valve Spring Retainers • Valve Spring Cups • Valve Stem Seals • Valve Spring Shims • Valve Spring I.D. Locators • Valve Stem Locks

Valve Spring Retainers, Spring Cups, Seals, I.D. Locators, and Spring Shims

Trick Flow valve spring retainers, valve spring cups, spring shims, and I.D. locators are made from 4140 chromoly steel, through-hardened for long life, and black oxide coated. Trick Flow titanium valve spring retainers substantially reduce weight and are incredibly strong to safely and reliably

build rpms faster. Trick Flow Viton®* fluoroelastomer valve stem seals feature a posi-stop design to prevent oil from leaking into the valve guides. For use with all cast iron and aluminum cylinder heads.

*Viton is a registered trademark of DuPont Performance Elastomers.



Valve Spring Retainers, Sets of 16

Steel

Part Number	Spring Description	Valve Spring Max. Dia.	Valve Stem Size	A	B	C	D	E
TFS-21400120	Dual spring	1.300"	11/32"	1.160"	.880"	.675"	—	7°
TFS-21400125	Dual spring +.050	1.300"	11/32"	1.160"	.880"	.675"	—	7°
TFS-21400410	GM LS, Dual spring	1.300"	8mm	1.160"	.880"	.675"	—	7°
TFS-21400415	GM LS, Dual spring +.050	1.300"	8mm	1.160"	.880"	.675"	—	7°
TFS-21400424	Dual spring	1.437" - 1.500"	11/32"	1.400"	1.050"	.690"	—	10°
TFS-21400425	Dual spring	1.550"	11/32"	1.500"	1.115"	.690"	—	10°
TFS-31400423	Single spring	1.300"	11/32"	1.187"	.850"	.650"	—	7°
TFS-30300423	Single spring +.050	1.300"	11/32"	1.187"	.850"	.650"	—	7°
TFS-41400423	Dual spring +.050	1.550"	11/32"	1.500"	1.115"	.690"	—	10°
TFS-51400423	Dual spring	1.437" - 1.500"	11/32"	1.375"	1.060"	.675"	—	7°
TFS-51900423	Single spring	1.000"	7mm	.880"	.620"	.500"	—	7°
TFS-52900423	Dual spring	1.100"	7mm, 3 groove	.980"	.805"	.610"	—	7°
TFS-52900424	Dual spring	1.100"	7mm, 1 groove	.980"	.805"	.610"	—	7°

Titanium

Part Number	Spring Description	Valve Spring Max. Dia.	Valve Stem Size	A	B	C	D	E
TFS-214T0120	Dual spring	1.300"	11/32"	1.160"	.880"	.675"	—	7°
TFS-214T0125	Dual spring +.050	1.300"	11/32"	1.160"	.880"	.675"	—	7°
TFS-214T0410	Dual spring	1.300"	8mm	1.240"	.880"	.615"	—	7°
TFS-214T0415	GM LS, Dual spring	1.300"	8mm	1.160"	.880"	.675"	—	7°
TFS-214T0420	Dual spring	1.437" - 1.500"	11/32"	1.442"	1.065"	.705"	—	10°
TFS-214T0425	GM LS, Dual spring, +.050	1.300"	8mm	1.160"	.880"	.675"	—	7°
TFS-214T0520	Dual spring	1.500" - 1.550"	11/32"	1.500"	1.110"	.690"	—	10°
TFS-214T0525	Dual spring +.050	1.500" - 1.550"	11/32"	1.500"	1.110"	.710"	—	10°
TFS-214T0620	Dual spring	1.625"	11/32"	1.500"	1.180"	.765"	—	10°
TFS-214T0630	Triple spring	1.625"	11/32"	1.500"	1.180"	.870"	.635"	10°

Valve Spring Cups

Part Number	Outer Diameter	Inner Diameter	Max. Spring O.D.	Overall Thickness	Shim Thickness	Fits Valve Guide O.D.	Quantity
TFS-52900434	1.175"	.620"	1.100"	.280"	.100"	.500"	8
TFS-52900444	1.175"	.620"	1.100"	.180"	.045"	.500"	8
TFS-31400433	1.415"	.505"	1.270"	.180"	.060"	.500"	16
TFS-51400434	1.610"	.640"	1.480"	.180"	.060"	.560"	16
TFS-21400426	1.670"	.705"	1.560"	.180"	.060"	.560"	16
TFS-41400434	1.745"	.630"	1.640"	.180"	.060"	.560"	16

Valve Stem Seals

Part Number	Outer Diameter	Inner Diameter	Overall Thickness	Fits Valve Guide O.D.	Quantity
TFS-30400454	.625"	11/32"	.500"	.500"	16
TFS-30600455	.600"	8mm	.500"	.500"	16
TFS-51900454	.700"	7mm	.640"	.500"	8
TFS-52400454	.640"	11/32"	.575"	.530"	16
TFS-52900454	.600"	7mm	.575"	.495"	8
TFS-54500454	.540"	8mm	.500"	.500"	8

Valve Spring Shims, Set of 16

Part Number	Outer Diameter	Inner Diameter	Max. Spring O.D.	Overall Thickness
TFS-31500432	1.460	.680	1.500	.060

Valve Spring I.D. Locators, Sets of 16


Part Number	Outer Diameter	Inner Diameter	Max. Spring O.D.	Overall Thickness	Shim Thickness	Fits Valve Guide O.D.
TFS-21400442	1.270"	.570"	1.300"	.200"	.050"	.560"
TFS-21400443	1.270"	.505"	1.300"	.200"	.050"	.500"
TFS-21400440	1.500"	.570"	1.550"	.180"	.060"	.560"
TFS-21400441	1.740"	.570"	1.640"	.180"	.060"	.560"

Steel Valve Stem Lock Specifications, Sets of 16


Valve Locks	Description	Valve Stem Size	Groove Type	Color
TFS-30600444	GM LS standard	8mm	Single groove	Black
TFS-31400444	7° +.050"	11/32"	Square	Gold
TFS-51400444	7° standard	11/32"	Square	Black
TFS-51900444	7° Ford 4.6L/5.4L	7mm	Triple groove	Silver
TFS-52400444	10° standard	11/32"	Square	Black
TFS-52400445	10° -.050"	11/32"	Square	Black



Dual Spring Retainer



Dual Spring Retainers



Triple Spring Retainers



Spring Cup



Valve Seal



Spring Shim



I.D. Locator



Valve Stem Locks

Valve Stem Locks

Trick Flow valve stem locks are perfect for upgrades and rebuilds. They are precision machined from hardened chromoly steel for long lasting durability and are available in many popular sizes.





TFS-30678533

TFS-30675600

TFS-30675540

TFS-19006-W

TFS-19004

True Roller Timing Chain Sets and Accessories

These billet steel timing sets from Trick Flow are engineered for durability and versatility. The .250" diameter, double-row true roller chain and black oxide-coated crank sprocket are heat-treated for unrivaled strength. The CNC-machined cam gear has nine crank sprocket keyways for zero and +/- 2°, 4°, 6°, or 8° timing adjustments. The timing marks are laser-etched.


The timing chain damper for GM LS provides a small amount of tension on the timing chain to keep it from "whipping" during gear changes and damaging the engine. It's manufactured from durable OE-quality plastic and includes mounting bolts. The damper fits non-VVT (variable valve timing) GM LS2/L92/LS3 engines, and it should be replaced when changing camshafts or timing chain sets.

The GM LS timing chain damper adapter bracket allows the use of LS2 timing chain dampers on any GM LS engine block. The bracket uses the three lower cam/thrust retainer plate bolts for attachment. The bracket can also be used with aftermarket LS2 timing chain dampers (such as TFS-30675540) with the included hardware.

- TFS-30675540 Timing chain damper, GM LS2/LS92/LS3 non-VVT engines, each
- TFS-30675600 Timing chain damper adapter bracket, GM LS, each
- TFS-K30675600 Timing chain damper and adapter bracket kit, each
- TFS-30678533 Timing chain set, LS1, each
- TFS-30678534 Timing chain set, LS2, each
- TFS-30778536 Timing chain set, 58x4x camshaft sensor, 3-bolt, L92/LS3, each
- TFS-30778535 Timing chain set, 58x4x camshaft sensor, 1-bolt, L92/LS3, each
- TFS-31478500 Timing chain set, Chevrolet 262-400, each
- TFS-41478510 Timing chain set, Chevrolet 396-454, each
- TFS-51478520 Timing chain set, Ford 255-351W, each
- TFS-53478530 Timing chain set, Ford 429/460, each

Track Max® Underdrive Harmonic Dampers

Trick Flow's underdrive harmonic dampers have many of the same features as our harmonic dampers—SFI 18.1 safety rating, carbon steel construction, injection-molded and bonded elastomer, and corrosion-resistant black powdercoat finish—but are underdriven to increase horsepower by reducing the amount of power required to drive external accessories.



TFS-18015

- TFS-18004 Underdrive damper, 1998-2002 5.7L Chevrolet/Pontiac Camaro/Firebird; 2004-06 5.7L/6.0L Pontiac GTO, 25% underdrive, each
- TFS-18005 Underdrive damper, 1997-2006 5.7L/6.0L Chevrolet Corvette, 25% underdrive, each
- TFS-18012 Underdrive damper, 1999-2006 4.8L-6.0L trucks/SUVs, 25% underdrive, each
- TFS-18015 Underdrive damper, 2005-08 5.7L Chrysler 300C; Dodge Magnum/Charger, 20% underdrive, each
- TFS-18016 Underdrive damper, 2003-08 5.7L Dodge Ram 1500-3500/Durango, 20% underdrive, each

Track Max® Harmonic Dampers

Put Trick Flow's advanced engineering to work for you with a Track Max harmonic damper. Engineered for safety and power, these SFI 18.1 rated, carbon steel dampers contain an injection-molded and bonded elastomer and come with removable counterweights. They also have engraved timing marks for easy adjustment and a corrosion-resistant black powdercoat finish for durability.

- TFS-19000 Damper, Chevrolet 283-350, internal balance, each
- TFS-19001 Damper, Chevrolet 400, external balance, each
- TFS-19002 Damper, Chevrolet 396-427, internal balance, each
- TFS-19003 Damper, Chevrolet 454, external balance, each
- TFS-19004 Damper, 1997-2002 5.7L Chevrolet/Pontiac Camaro/Firebird; 2005-06 6.0L Pontiac GTO, each
- TFS-19005 Damper, 1997-2007 5.7L/6.0L Chevrolet Corvette, each
- TFS-19006 Damper, Ford 289-351W (except 5.0L), 28 ounce external balance, each
- TFS-19006-W Counterweight, Ford 289-351W (except 5.0L), 28 ounce external balance, bolt-on, each
- TFS-19007 Damper, 1981-2001 Ford 5.0L, 50 ounce external balance, each
- TFS-19008 Damper, Ford 429/460, external balance, each
- TFS-19009 Damper, 1996-2004 Ford 4.6L 2V, external balance, each
- TFS-19010 Damper, Chrysler 273-360, internal balance, each
- TFS-19011 Damper, Chrysler 318-360, external balance, each
- TFS-19012 Damper, Chrysler 383-440, neutral balance, each



TFS-18010

Track Max® Underdrive Harmonic Damper and Pulley Kits for Ford 4.6L 2V/3V/4V

Trick Flow assembled these Track Max underdrive harmonic damper and pulley kits just for the Ford 4.6L. The kits start with an underdrive damper, then Trick Flow adds black powdercoated steel pulleys for the water pump and alternator to protect those accessories from high-speed burnout while allowing more power to go to the wheels.

- TFS-18009 Underdrive damper/pulley kit, 1996-2000 Ford 4.6L 2V/4V, with long water pump, 25% underdrive, each
- TFS-18010 Underdrive damper/pulley kit, 2001-04 Ford 4.6L 2V/4V, with short water pump, 25% underdrive, each
- TFS-18011 Underdrive damper/pulley kit, 2005-07 Ford 4.6L 3V, 25% underdrive, each

Carburetors • Fuel Pressure Regulators • Throttle Cable Brackets • Linkage Adapters • Regulator Brackets • Carburetor Spacers



Trick Flow by Quick Fuel Technology Carburetors



TFS-21050R

Realizing the need for carburetion that can keep up with the increased power levels generated by Trick Flow engine components, Trick Flow teamed up with the fuel delivery specialists at Quick Fuel Technology to produce four-barrel carburetors capable of feeding high-horsepower street and race engines.

The Street Heat™ 650 cfm mechanical secondary carburetor features the power and tunability of a race carb in a streetable, lightweight package. Attributes include billet aluminum throttle body and metering blocks, replaceable idle feed restrictors, power valve channel restrictions, idle and high-speed air bleeds, 4-corner idle system, Holley 4500 Dominator-style fuel bowls with sight glass windows, additional links to tune the secondary opening rate, downleg boosters, dual fuel inlets, and an electric choke.


The Track Heat® (750 cfm) and Track Heat Pro (850 cfm and 950 cfm) mechanical secondary, choke-less carburetors feature high-flow main bodies with a blended venturi area to help smooth out the airflow into the intake manifold. Trick Flow added screw-in idle air bleeds, high-speed air bleeds, and accelerator pump discharge nozzles for almost unlimited tunability. The CNC-machined billet metering blocks have 4-stage emulsion bleeds for more precise fuel metering, improved throttle response, and a more uniform fuel performance curve. Rounding out the features are dual fuel inlets, downleg boosters, and additional links to tune the secondary opening rate.

The Race carburetor is a 1,050 cfm, Dominator-style carb featuring a new die-cast aluminum main body with a lengthened venturi section for greater midrange torque and better airflow. The annular discharge booster venturis are precision die-cast with CNC-machined billet aluminum inserts for smoother and more refined air entry, stronger vacuum signal, less turbulence, and improved fuel emulsion for better combustion. Other notable features include CNC-machined billet metering blocks with 3-circuit metering, changeable emulsion, idle feed, intermediate bowl, and feed discharge bleeds, dual fuel inlets, mechanical secondaries, and die-cast aluminum fuel bowls with sight glass windows. The external linkage comes with links for moderate progressive (25 percent), medium progressive (40 percent), full progressive (50 percent), and 1:1 primary throttle opening rates.

- TFS-20650 Street Heat carburetor, 650 cfm, square bore carburetor flange, each
- TFS-20750R Track Heat carburetor, 750 cfm, square bore carburetor flange, each
- TFS-20850R Track Heat Pro carburetor, 850 cfm, square bore carburetor flange, each
- TFS-20950R Track Heat Pro carburetor, 950 cfm, square bore carburetor flange, each
- TFS-21050R Race carburetor, 1,050 cfm, Dominator carburetor flange, each
- TFS-203210 Rebuild kit for Street Heat, Track Heat, and Track Heat Pro carburetors, each

TFX™ Bypass Fuel Pressure Regulators

Trick Flow TFX universal bypass fuel pressure regulators are ideal for applications where precise fuel control is required. The Type 1 regulator can be adjusted from 3-20 psi with the standard pressure spring (perfect for carburetors) or from 20-60 psi after installing the included high-pressure spring (EFI systems). The Type 2 regulator is designed to provide total control of the fuel pressure settings on EFI-equipped cars. This regulator has a -6 AN O-ring boss inlet, outlet, and return fittings, a 1/8" NPT gauge port, and can be adjusted from 30-70 psi. Both regulators include a boost reference port that raises fuel pressure on a 1:1 ratio. Like our other TFX fuel system components, the regulators are black anodized for stealthy looks and corrosion resistance.



TFS-27001



- TFS-27001 Fuel pressure regulator, Type 1, 3-60 psi, each
- TFS-5158REG1 Fuel pressure regulator, Type 2, 30-70 psi, each



TFS-20000



TFS-20000-F

TFS-20000-L

Throttle Cable Mounting Brackets, Regulator Brackets, and Linkage Adapters

Crafted from black anodized billet aluminum, these Trick Flow throttle cable brackets make carb installation look clean and perform great. All of the hardware you need is included (including dual return springs!) and installation is easy as mounting the appropriate bracket to the base of your carburetor. The brackets are compatible with most square bore and Holley Dominator-style carburetor designs and transmission kickdown cables.

Also available are fuel pressure regulator brackets and linkage adapters made from the same great-looking black anodized aluminum as the cable brackets. The regulator brackets mount to the passenger side of a carburetor to make plumbing easy and reduce the distance of the fuel lines to the float bowls. They'll clear throttle linkages, electric and manual chokes, and vacuum ports. The linkage adapters allow you to easily attach the throttle cable to the mounting bracket on vehicles equipped with Ford or Lokar-style throttle cables—no fabrication required. Mounting hardware included.

Throttle Cable Mounting Brackets

- TFS-20000 Throttle cable bracket, square bore carburetor, each
- TFS-20005 Throttle cable bracket, Holley Dominator carburetor, each



Throttle Cable Linkage Adapters

- TFS-20000-F Linkage adapter, for Ford-style throttle cables, 5/16" slotted hole with 1/4" bolt tab, each
- TFS-20000-L Linkage adapter, for Lokar-style throttle cables, 5/16" slotted hole, each

Fuel Pressure Regulator Brackets

- TFS-20010 Regulator bracket, square bore carburetor with Holley regulator, each
- TFS-20011 Regulator bracket, square bore carburetor with Aeromotive regulator, each
- TFS-20020 Regulator bracket, Holley Dominator carburetor with Holley regulator, each
- TFS-20021 Regulator bracket, Holley Dominator carburetor with Aeromotive regulator, each



TFS-2145001C



TFS-2141501C



TFS-2141501B

Carburetor Spacers

Give your carburetor a little more space for a noticeable power boost with a premium quality Trick Flow carburetor spacer.

The unique, CNC-ported exit shape on Trick Flow's four-hole carburetor spacers smooth the airflow between the bottom of the carburetor and the intake manifold plenum for more torque and horsepower. Available in two versions, phenolic/composite and billet aluminum, they fit Holley 4150 and other square bore-style carbs.

The open-style spacer for Holley Dominator carbs features a cloverleaf design that increases power in the mid-to-upper rpm range.

The spacers are 1" thick and come complete with mounting studs and gaskets.

- TFS-2141501B Billet aluminum spacer, black anodized, square bore carburetors, each
- TFS-2141501C Phenolic/composite spacer, square bore carburetors, each
- TFS-2145001C Phenolic/composite spacer, Holley Dominator carburetors, each





TFS-27021

TFS-5188000S



TFX™ Fuel Rail and Pressure Sensor Adapters for Ford 4.6L 2V/3V/4V

Trick Flow has engineered two easy ways to upgrade the factory fuel systems on Ford 4.6L engines for better performance.

The TFX fuel rail adapters make it simple to install a nitrous oxide solenoid, a fuel pressure gauge, or any other component that requires a 1/8" NPT fitting. They mount between the factory fuel rail and pressure sensor.

The fuel pressure sensor adapter allows the installation of Trick Flow fuel rails on engines that retain the factory returnless fuel system. Its design permits the pressure sensor to be mounted either remotely or coupled directly to the fuel rails; -8 AN ORB inlet and outlet ports provide a positive seal and eliminate the need for thread sealant.

The adapters feature a black anodized finish with a white engraved Trick Flow logo for good looks and durability; mounting hardware is included.

- | | |
|--------------|--|
| TFS-27021 | Fuel rail adapter, 1999-2004 Ford 4.6L 2V, each |
| TFS-27022 | Fuel rail adapter, 2005-10 Ford 4.6L 3V, each |
| TFS-5188000S | Fuel pressure sensor adapter, universal Ford-style, 1997-2004 4.6L 2V/4V, each |



TFS-RF010

TFS-RF040

TFS-RF100

TFX™ Inline Fuel Filters

Trick Flow TFX inline fuel filters keep fuel clean without restricting it—just what your high performance engine requires. The black anodized billet aluminum filters can handle up to 300 psi of fuel pressure and 1,000 horsepower. Available with your choice of 10, 40, or 100 micron elements and with -6, -8, or -10 AN male inlet and outlet fittings.

- | | |
|-----------|--|
| TFS-23000 | Inline filter, -6 AN, 40 micron element, 1.250" x 4.000", each |
| TFS-23001 | Inline filter, -8 AN, 40 micron element, 1.250" x 4.000", each |
| TFS-23002 | Inline filter, -8 AN, 10 micron element, 1.750" x 6.500", each |
| TFS-23003 | Inline filter, -10 AN, 10 micron element, 1.750" x 6.500", each |
| TFS-23004 | Inline filter, -8 AN, 100 micron element, 1.750" x 6.250", each |
| TFS-23005 | Inline filter, -10 AN, 100 micron element, 1.750" x 6.250", each |
| TFS-RF010 | Replacement element, 10 micron, each |
| TFS-RF040 | Replacement element, 40 micron, each |
| TFS-RF100 | Replacement element, 100 micron, each |

TFS-23000



TFS-23003

TFX™ Canister Fuel Filter

Trick Flow's TFX billet aluminum, high-flow canister-style fuel filter can handle the pressures of the most extreme high performance carbureted or fuel injected fuel system. The lightweight filter assembly flows 1,500 lbs. per hour with less than 1 psi of pressure drop through its 3/8" inlet and outlet fittings. The maximum fuel pressure rating is a whopping 2,000 psi! A 10 micron replaceable filter element and chrome-plated mounting hardware are included.

- | | |
|-----------|---|
| TFS-23006 | Canister filter, 6.125" x 3.250", each |
| TFS-RF006 | Canister filter replacement element, each |



TFS-23006



TFS-25000

TFS-25017

TFS-25013P

TFX™ Fuel Pumps

TFX Electric Fuel Pump and Regulator Combo for Carbureted Engines

To feed the serious demands of your carbureted high performance engine, you need the serious performance of this TFX fuel pump and regulator combo from Trick Flow.

This combo features the compact, external-mount TFX fuel pump (3.500" wide x 3.125" high x 5.500" long) capable of free-flowing 140 gph of fuel at a maximum pressure of 14 psi. It has 3/8" NPT ports for easy connections and externally accessible pressure relief valves. To control all that fuel flow, you also get the universal bypass-style TFX fuel pressure regulator. It's CNC-machined from cast aluminum and is adjustable from 4.5 to 9 psi. The combo also includes a fuel pump mounting bracket with a rubber isolator to minimize cabin noise.

- | | |
|------------|--|
| TFS-25013 | TFX fuel pump and regulator combo for carbureted engines, each |
| TFS-25013P | TFX fuel pump only for carbureted engines, each |
| TFS-25017 | TFX fuel pressure regulator only for carbureted engines, each |

TFX Electric Fuel Pumps for 1986-97 EFI Mustang

Trick Flow TFX high-volume, in-tank electric fuel pumps for 1986-97 EFI Mustangs are not only great for stock replacement, but are designed to meet the fuel requirements of modified engines. And unlike stock fuel pumps that only flow 88-95 lph, Trick Flow pumps are available in 155, 190, and 255 lph flow rates to help your modified engine meet its full power potential. New fuel strainer included; E85 compatible.

- | | |
|-----------|---|
| TFS-25000 | Fuel pump, 155 lph, in-tank mount, each |
| TFS-25001 | Fuel pump, 190 lph, in-tank mount, each |
| TFS-25002 | Fuel pump, 255 lph, in-tank mount, each |



TFS-25004

TFX™ Universal Electric Fuel Pump for EFI Engines

Multi-port EFI systems need a stable fuel supply at all rpms, and Trick Flow's high-pressure, high-flow electric fuel pump can supply it. Features include a free-flow rate of 43 gph at a maximum pressure of 85 psi, 5/16" inlet and outlets, brass stud terminals for secure connections, and two cushioned clamps for mounting. This fuel pump is ideal as a stand-alone pump for multi-port EFI systems on engines making up to 500 HP, or as a booster for nitrous-assisted engines. Kit includes fuel pump, 30 amp relay, fuse holder, wire, connectors, and mounting hardware; E85 compatible.

- | | |
|------------|---|
| TFS-25004 | Fuel pump kit, universal fit, EFI, includes fuel pump and wiring kit, 43 gph @ 85 psi, each |
| TFS-25004P | Fuel pump only, universal fit, EFI, 43 gph @ 85 psi, each |
| TFS-25004K | Fuel pump wiring kit, includes 30 amp relay, fuse holder, wire, and connectors, each |

Trick Flow by Injector Dynamics Fuel Injectors

Developed for extreme demand, severe race duty applications, these high quality fuel injector sets are made by Injector Dynamics, one of the premier names in high-flow fuel injectors. Injector Dynamics batch-tests large quantities of specially modified fuel injectors and carefully matches them into sets based on their dynamic fuel flow across the pulsewidth range. The result is vastly superior cylinder-to-cylinder consistency, even at very low pulsewidths.

Dead time compensation values for pressure and voltage are provided in native Ford or GM formats to ensure proper compensation for ECU tuning and to confirm air/fuel ratios will remain consistent as atmospheric or voltage conditions change.

All flow values are at 3 bar (43.5 psi).

TFS-891000	Fuel injectors, GM LT1/LS1, 1,000cc/min., 95 lbs./hr., set of 8
TFS-891001	Fuel injectors, GM LS2/LS3/LS7/L76/L92/L99, 1,000cc/min., 95 lbs./hr., set of 8
TFS-891002	Fuel injectors, 1986-2004 Ford 5.0L/4.6L, 1,000cc/min., 95 lbs./hr., set of 8
TFS-891003	Fuel injectors, 2005 and later Ford 4.6L/5.4L and 5.0L, 1,000cc/min., 95 lbs./hr., set of 8
TFS-891004	Fuel injectors, GM LT1/LS1, 850cc/min., 81 lbs./hr., set of 8
TFS-891005	Fuel injectors, GM LS2, 850cc/min., 81 lbs./hr., set of 8
TFS-891006	Fuel injectors, GM LS3/LS7/L76/L92/L99/LSA/LS9, 850cc/min., 81 lbs./hr., set of 8
TFS-891007	Fuel injectors, 2005 and later Ford 4.6L/5.4L and 5.0L, 850cc/min., 81 lbs./hr., set of 8



TFS-891000



TFS-89030



TFS-89860



TFS-89960

TFX™ Fuel Injectors

With electronically drilled and machined disc-type fuel control valves, plus improved nozzles and coil windings, Trick Flow TFX fuel injectors atomize fuel better, resist clogging, are quieter, and require less energy to operate than other aftermarket injectors.



And the features don't stop there. Low magnetic stainless steel injector bodies prevent corrosion from underhood contaminants and seal the injectors from moisture contamination. OEM-style clip grooves secure the injectors to fuel rails and eliminate possible fuel leaks. Viton® fluorocarbon O-rings seal the injectors to the fuel rails and intake manifold to prevent fuel and air leaks under extreme operating conditions. High-quality, 1/2 micron filter screens keep foreign debris and contaminants from entering the injectors to ensure proper performance and a long life cycle. TFX fuel injectors are 100% duty cycle tested to ensure reliability and performance. Sold in sets of 8. Also available individually by adding "-1" to the end of the part number. All flow values are at 3 bar (43.5 psi).

TFX Bosch-Style Fuel Injectors

TFS-89024	Fuel injectors, 24 lbs./hr., 14.4 ohms, Jetronic plugs, set of 8
TFS-89030	Fuel injectors, 30 lbs./hr., 14.4 ohms, Jetronic plugs, set of 8
TFS-89036	Fuel injectors, 36 lbs./hr., 14.4 ohms, Jetronic plugs, set of 8
TFS-89044	Fuel injectors, 44 lbs./hr., 12.0 ohms, Jetronic plugs, set of 8
TFS-89048	Fuel injectors, 48 lbs./hr., 12.0 ohms, Jetronic plugs, set of 8
TFS-89055	Fuel injectors, 55 lbs./hr., 2.2 ohms, Jetronic plugs, set of 8
TFS-89072	Fuel injectors, 72 lbs./hr., 2.0 ohms, Jetronic plugs, set of 8
TFS-89083	Fuel injectors, 83 lbs./hr., 2.2 ohms, Jetronic plugs, set of 8
TFS-89095	Fuel injectors, 95 lbs./hr., 2.2 ohms, Jetronic plugs, set of 8
TFS-89120	Fuel injectors, 120 lbs./hr., 2.2 ohms, Jetronic plugs, set of 8
TFS-89160	Fuel injectors, 160 lbs./hr., 2.2 ohms, Jetronic plugs, set of 8

TFX Siemens-Style Fuel Injectors

TFS-89860	Fuel injectors, 60 lbs./hr., 12.0 ohms, Jetronic plugs, set of 8
TFS-89960	Fuel injectors, 60 lbs./hr., 12.0 ohms, USCAR plugs, set of 8
TFS-89880	Fuel injectors, 80 lbs./hr., 12.0 ohms, Jetronic plugs, set of 8
TFS-89980	Fuel injectors, 80 lbs./hr., 12.0 ohms, USCAR plugs, set of 8

TFX™ Fuel Line Fittings

Trick Flow's reusable TFX fuel line fittings are easy to install. They're made from precision CNC-machined aerospace grade aluminum and feature a sharp, black anodized finish for great looks and long-lasting durability. Best of all, they're available in several sizes and styles for any plumbing job.



TFS-22456



TFS-22906



TFS-22006



TFS-22386



TFS-22666

TFS-22006	Hose end, -6 AN, straight, each
TFS-22008	Hose end, -8 AN, straight, each
TFS-22001	Hose end, -10 AN, straight, each
TFS-22456	Hose end, -6 AN, 45°, each
TFS-22458	Hose end, -8 AN, 45°, each
TFS-22451	Hose end, -10 AN, 45°, each
TFS-22906	Hose end, -6 AN, 90°, each
TFS-22908	Hose end, -8 AN, 90°, each
TFS-22901	Hose end, -10 AN, 90°, each
TFS-22386	Adapter, 3/8" NPT to -6 AN, each
TFS-22388	Adapter, 3/8" NPT to -8 AN, each
TFS-22666	Union, -6 AN to -6 AN, each
TFS-22888	Union, -8 AN to -8 AN, each
TFS-22111	Union, -10 AN to -10 AN, each



TFS-24258

TFX™ EFI Throttle Bodies

Add 5-15 more rear-wheel horsepower in less than an hour with a Trick Flow TFX EFI throttle body. The cast aluminum throttle bodies are crafted with hand-assembled butterflies for maximum quality and dependability. Idle adjustment is as easy as turning a screw, so you'll be enjoying that new power and responsiveness in no time. The LS1 models benefit from multiple throttle linkages for a wide variety of custom installations. Includes gaskets and mounting hardware.

TFS-24070†	Throttle body, 1996-2004 Ford 4.6L/5.4L 2V, 70mm, each
TFS-24075†	Throttle body, 1996-2004 Ford 4.6L/5.4L 2V, 75mm, each
TFS-24080	Throttle body, 1998-2002 5.7L Chevrolet/Pontiac Camaro/Firebird, 2004 GTO, 80mm, each
TFS-24085	Throttle body, 1998-2002 5.7L Chevrolet/Pontiac Camaro/Firebird, 2004 GTO, 85mm, each
TFS-24258†	Throttle Body, 1992-97 5.7L Chevrolet/Pontiac Camaro/Firebird/Corvette, twin 58mm, each
TFS-24570*†	Throttle body, 1986-93 5.0L Ford Mustang, 70mm, each
TFS-24575*†	Throttle body, 1986-93 5.0L Ford Mustang, 75mm, each

*EGR plate required, not included.

†50-state emissions-legal under CARB E.O. #D-369-10.





TFS-K26017

Trick Flow by Magnuson Supercharger Systems

The airflow experts at Trick Flow teamed up with the supercharger experts at Magnuson to produce application-specific systems that can add up to 150 horsepower to your GM, Ford, or Dodge hot rod!

At the core of each system is the Magnuson supercharger, a Roots design upgraded with intermeshed helical rotors and special port geometry to increase power with original equipment quietness and reliability and no adverse effects on fuel economy. The supercharger is overdriven for instantaneous boost off-idle, and an internal bypass valve eliminates part throttle power loss. Rounding out the features is a self contained lubrication system. Trick Flow by Magnuson supercharger systems come with a three year warranty.

MP112 Supercharger Systems

Systems include an MP112 supercharger, cast aluminum intake manifold, air-to-water intercooler, plumbing, wiring harnesses, brackets, hardware, programmer to properly calibrate your ECM, and an instruction manual complete with color photographs (exact contents vary by application).

- TFS-K26003 Supercharger system, 2005-08 4.6L Ford Mustang GT, each
- TFS-K26006 Supercharger system, 1999-2003 4.8L-6.0L Chevrolet/GMC Silverado/Sierra, Suburban/Tahoe/Yukon/Yukon XL, each
- TFS-K26007 Supercharger system, 2004-06 4.8L-6.0L Chevrolet/GMC Silverado/Sierra 2500, Suburban/Avalanche/Yukon XL 2500, each
- TFS-K26008 Supercharger system, 2007-08 5.3L Flex Fuel (J-code only) Chevrolet/GMC Silverado/Sierra, each
- TFS-K26009 Supercharger system, 2006-07 6.0L Chevrolet Trailblazer SS, each
- TFS-K26010 Supercharger system, 2004 5.7L Pontiac GTO, each
- TFS-K26011 Supercharger system, 2005-06 6.0L Pontiac GTO, each



MP122 Supercharger Systems

Systems include an MP122 supercharger, cast aluminum intake manifold and top plate for square bore carburetors, crank pulley, idler assembly, distributor hold down, alternator bracket, 6-rib drive belt, gaskets, spacers, hardware, and an instruction manual complete with color photographs (exact contents vary by application).

- TFS-K26004 Supercharger system, pre-1987 small block Chevrolet, long water pump, each
- TFS-K26005 Supercharger system, pre-1987 small block Chevrolet, short water pump, each
- TFS-K26012 Supercharger system, 1987 and later small block Chevrolet with Vortec cylinder heads, short water pump, each

MP1900 TVS Supercharger Systems

Systems include an MP1900 TVS supercharger, cast aluminum intake manifold, air-to-water intercooler, high capacity fuel injectors and/or fuel pump, plumbing, wiring harnesses, brackets, hardware, programmer to properly calibrate your ECM (TFS-K26015 only), and an instruction manual complete with color photographs (exact contents vary by application). Customers purchasing part numbers TFS-K26013, TFS-26014, TFS-26016, and TFS-26018 must send their ECM to Magnuson via the enclosed pre-paid shipping container to be reprogrammed.

- TFS-K26013 Supercharger system, 2007-08 6.0L/6.2L Chevrolet/GMC Silverado/Sierra, black, each
- TFS-K26014 Supercharger system, 2007-08 6.0L/6.2L Cadillac/Chevrolet/GMC Escalade/Tahoe/Yukon/Suburban/Avalanche, black, each
- TFS-K26015 Supercharger system, 2008-early 2009 6.0L Pontiac G8 GT, black, each
- TFS-K26016 Supercharger system, 2007-09 4.8L/5.3L Chevrolet/GMC Silverado/Sierra, black, each
- TFS-K26018 Supercharger system, 2007-09 5.3L Flex Fuel (J-code only) Chevrolet/GMC Silverado/Sierra and Trailblazer/Envoy, each
- TFS-K26026 Supercharger system, 2004-07 4.8L-6.0L Chevrolet/GMC Silverado/Sierra, Trailblazer/Envoy, Tahoe/Yukon, and Suburban, each

MP2300 TVS Supercharger Systems

Magnuson's MP2300 TVS supercharger technology is the same used for the Corvette ZR1. The four-lobe rotor features a high-twist 160° helix that increases efficiency, lowers discharge temperatures, and is much quieter than previous superchargers. The superchargers also interface seamlessly with OE cylinder deactivation systems for improved fuel economy during light throttle applications.

MP2300 TVS supercharger systems come complete with a high-velocity aluminum intake manifold, integral air-to-water intercooler, a programmer to properly calibrate your ECU, new fuel injectors and fuel rails, an instruction manual complete with color photographs, and all necessary brackets, connectors, hardware, and specialized tools required for installation (exact contents vary by application).

- TFS-K26017 Supercharger system, 2010-13 6.2L Chevrolet Camaro SS, each
- TFS-K26020 Supercharger system, 2009-10 5.7L Dodge Challenger R/T, each
- TFS-K26021 Supercharger system, 2009-10 6.1L Dodge Challenger SRT8, each
- TFS-K26022 Supercharger system, 2005 6.0L Pontiac GTO, each
- TFS-K26023 Supercharger system, 2011 5.0L Ford Mustang GT, each
- TFS-K26024 Supercharger system, 2009-10 5.7L Dodge Ram 1500-3500, each
- TFS-K26025 Supercharger system, 2006-10 6.1L Jeep Grand Cherokee SRT8, each

Phenolic TBI Spacer Kits for Trucks

Increase pulling power and enhance throttle response without sacrificing drivability with Trick Flow's 1" tall phenolic throttle body spacers. The spacers improve both low-end power and fuel economy, and come with gaskets and installation hardware. 50-state emissions-legal under CARB E.O. #D-369-17.

- TFS-30620001 TBI Spacer for 1999-2001 4.8L-6.0L Chevy/GMC trucks, each
- TFS-30620002 TBI Spacer for 2001-02 8.1L and 2002-03 4.8L-6.0L Chevy/GMC trucks, each
- TFS-31520001 TBI Spacer for 1986-92 4.3L-5.7L Chevy/GMC trucks, each
- TFS-31520002 TBI Spacer for 1993-95 4.3L-5.7L Chevy/GMC trucks, each
- TFS-31520003 TBI Spacer for 1996-2003 4.3L Chevy/GMC trucks, each
- TFS-31520004 TBI Spacer for 1996-99 5.0L/5.7L Chevy/GMC trucks, each
- TFS-51620001 TBI Spacer for 1997-2003 4.6L Ford F-150/Expedition, each
- TFS-51620002 TBI Spacer for 1997-2003 5.4L Ford F-150/Expedition, each
- TFS-61520001 TBI Spacer for 1992-2001 3.9L-5.9L Dodge Ram/Dakota/Durango, each
- TFS-61520002 TBI Spacer for 1991-2002 4.0L Jeep YJ/TJ/XJ, each



TFS-31520002



TFS-23100



TFS-23070

TFX™ High-Flow Air Intake Kits



The Trick Flow TFX high-flow air intake kits are built for performance and show, using the highest quality components available to provide late-model vehicles with more power and acceleration. The filters are washable cotton-gauze, and a polished aluminum inlet tube adds some sparkle under the hood. The kits also feature heat shields to isolate cooler air from engine heat (most applications), plus all necessary mounting hardware and instructions. Manufactured by K&N for Trick Flow.

- TFS-23074 High-flow air intake kit, 2010-13 6.2L Chevrolet Camaro SS, each
- TFS-23083 High-flow air intake kit, 2010-11 3.6L Chevrolet Camaro, each
- TFS-23097 High-flow air intake kit, 2011-13 5.0L Ford F-150, each
- TFS-23100 High-flow air intake kit, 1999-2004 4.8L/5.3L Chevrolet/GMC Silverado/Sierra, each
- TFS-23101*† High-flow air intake kit, 1999-2007 4.8L-6.0L Cadillac/Chevrolet/GMC trucks/SUVs, each
- TFS-23102*† High-flow air intake kit, 2005-07 4.8L-6.0L Cadillac/Chevrolet/GMC trucks/SUVs, each
- TFS-23103† High-flow air intake kit, 1997-2004 4.6L/5.4L Ford/Lincoln F-150/250 and Expedition/Navigator, each
- TFS-23104† High-flow air intake kit, 2003-08 5.7L Dodge Ram 1500-3500, each
- TFS-23105*† High-flow air intake kit, 2007-08 4.8L-6.2L Cadillac/Chevrolet/GMC trucks/SUVs, each

*Many more applications available. Please visit TrickFlow.com and type "High-Flow Kits" into the search box to find your specific application.

†50-state emissions-legal under CARB E.O. #D-369-14.

TFX™ Cold Air Intake Kits



Trick Flow TFX cold air intake kits replace an engine's restrictive stock air cleaner or airbox with a black composite, low-restriction unit and reusable cotton-gauze filter that will increase airflow to the engine. As we all learned in Horsepower 101, more air equals more power. The kits include an air filter assembly, a plenum (where applicable), mounting hardware, and instructions. Manufactured by K&N for Trick Flow.

- TFS-23050† Cold air intake kit, 1999-2004 4.8L-5.3L Chevrolet/GMC Silverado/Sierra 1500, each
- TFS-23051† Cold air intake kit, 1996-2005 4.3L Chevrolet/GMC S10/15 trucks/SUVs, each
- TFS-23052† Cold air intake kit, 2001-07 6.0L Chevrolet/GMC 2500HD/3500, each
- TFS-23053*† Cold air intake kit, 2005 4.8L-6.0L Chevrolet/GMC trucks/SUVs, each
- TFS-23054 Cold air intake kit, 1988-95 5.7L Chevrolet/GMC trucks/SUVs, each
- TFS-23055*† Cold air intake kit, 1999-2004 6.0L Chevrolet/GMC Silverado/Sierra, each
- TFS-23056† Cold air intake kit, 1996-2000 5.0L/5.7L Chevrolet/GMC trucks/SUVs, each
- TFS-23057† Cold air intake kit, 1993-97 5.7L Chevrolet/Pontiac Camaro/Firebird, each
- TFS-23058† Cold air intake kit, 1994-96 5.7L Chevrolet Impala SS/Caprice, each
- TFS-23059† Cold air intake kit, 1994-2002 5.2L/5.9L Dodge Ram 1500/2500, each
- TFS-23060† Cold air intake kit, 2003-08 5.7L Dodge Ram 1500/2500, each
- TFS-23061† Cold air intake kit, 1988-95 5.0L/5.8L Ford F-150/Bronco, each
- TFS-23062† Cold air intake kit, 1997-2003 4.6L/5.4L Ford F-150; 1997-2002 4.6L/5.4L Ford/Lincoln Expedition/Navigator, each
- TFS-23063† Cold air intake kit, 2004-05 4.6L Ford F-150, each
- TFS-23064† Cold air intake kit, 2004-08 5.4L Ford F-150, each
- TFS-23065† Cold air intake kit, 1999-2004 5.4L F-250/350 Super Duty/Excursion, each
- TFS-23066† Cold air intake kit, 1996-2004 4.6L Ford Mustang GT, each
- TFS-23067† Cold air intake kit, 2005-06 4.6L Ford Mustang GT, each
- TFS-23068† Cold air intake kit, 1988-95 4.9L-7.5L Ford F-150-350/Bronco, each
- TFS-23069† Cold air intake kit, 2004 5.7L Pontiac GTO, each
- TFS-23070† Cold air intake kit, 2005 6.0L Pontiac GTO, each
- TFS-23071 Cold air intake kit, 2007-09 4.6L Ford Mustang GT, each
- TFS-23072 Cold air intake kit, 2010 4.0L Ford Mustang, each
- TFS-23077 Cold air intake kit, 2008 5.4L Ford/Lincoln F-150/Mark LT, each
- TFS-23078 Cold air intake kit, 2005-07 5.7L/6.1L Chrysler 300C; Dodge Charger/Magnum, each
- TFS-23079*† Cold air intake kit, 2007 4.8L-6.2L Cadillac/Chevrolet/GMC trucks/SUVs, each
- TFS-23080 Cold air intake kit, 2006-07 6.0L Chevrolet Corvette, each
- TFS-23081† Cold air intake kit, 2001-04 5.7L Chevrolet Corvette, each
- TFS-23082 Cold air intake kit, 2008-09 6.0L/6.2L Pontiac G8 GT/GXP, each
- TFS-23084 Cold air intake kit, 2005-06 5.4L Ford F-250 Super Duty, each
- TFS-23086 Cold air intake kit, 2009-12 5.7L Dodge Ram 1500, each
- TFS-23087 Cold air intake kit, 2008 4.6L Ford F-150, each
- TFS-23088 Cold air intake kit, 2007-12 5.4L Ford/Lincoln Expedition/Navigator, each
- TFS-23089 Cold air intake kit, 2009-10 4.6L Ford F-150, each
- TFS-23091 Cold air intake kit, 2007-12 3.7L Chevrolet/GMC Colorado/Canyon, each
- TFS-23092* Cold air intake kit, 2009-13 4.8L-6.2L Chevrolet/GMC Silverado/Sierra, each
- TFS-23093 Cold air intake kit, 2008-13 6.2L Chevrolet Corvette, each
- TFS-23094 Cold air intake kit, 2010-13 6.2L Chevrolet Camaro SS, each
- TFS-23095 Cold air intake kit, 2010 3.6L Chevrolet Camaro, each
- TFS-23096 Cold air intake kit, 2007-10 5.4L Ford F-250 Super Duty, each

- *Many more applications available. Please visit TrickFlow.com and type "Cold Air" into the search box to find your specific application.
- †50-state emissions-legal under CARB E.O. #D-369-14.



TFS-N4500

TFX™ Nitrous Systems

TFX Carbureted Nitrous Systems

Trick Flow TFX nitrous systems are an affordable way to bolt on big power. TFX systems are adjustable in 50 horsepower increments from 50 to 200 horsepower, and include everything you need to install them on to your vehicle.

- TFS-N4150 Nitrous system, Holley 4150, each
- TFS-N4500 Nitrous system, Holley 4500, each

TFX EFI Nitrous Systems

These EFI manifold nitrous systems are specifically designed for 1986-95 5.0L Fords with Trick Flow intake manifolds. TFX systems are adjustable in 50 horsepower increments from 50 to 200 horsepower. The systems include spray bar plates, calibrated solenoids, jets, switches, lines, filter, 10 lb. unfilled bottle, bottle brackets, 14 ft. of -4 AN braided stainless steel line, hardware, and instructions.

- TFS-N5150 Nitrous system, StreetBurner®/Track Heat® intake, each
- TFS-N5150PL Plate and jets only, StreetBurner/Track Heat intake, kit
- TFS-N515R Nitrous system, R-Series intake, each
- TFS-N515RPL Plate and jets only, R-Series intake, kit
- TFS-N5158 Nitrous system, Box-R-Series intake, each
- TFS-N5158PL Plate and jets only, Box-R-Series intake, kit



Air and Fuel Delivery

Trick Flow by Stainless Works Headers



Headers

Flow is about more than just stuffing as much air and fuel as possible into an engine. In order to draw a new air/fuel charge into the cylinder heads to burn, everything left over from igniting the previous air/fuel charge must be removed from the cylinders efficiently.

That's why Trick Flow turned to the exhaust specialists at Stainless Works for headers designed to complement the high-flow characteristics of Trick Flow's cylinder heads and other performance engine components. Made in the USA from 304L stainless steel, the Trick Flow by Stainless Works Headers feature CNC mandrel-bent tubing for maximum flow and extra-thick, laser-cut 3/8" flanges for a leak-free fit. Plus, the headers are fully TIG-welded—no need to worry about tubes cracking at the flanges or collectors. All headers are backed by a lifetime warranty.

Turbo Headers

Trick Flow even offers headers just for turbo applications. These Trick Flow by Stainless Works turbo headers are engineered to handle the higher EGTs typically found in turbocharged applications. The headers are made from heavy wall 16 gauge 304L stainless steel for added durability and are carefully TIG welded using 308 SS weld wire and are back purged to assure full weld penetration. Requires fabrication to fit an exhaust system.

NOTE: These turbo headers are designed to work with dimensionally stock cylinder heads and valve covers. If you are using aftermarket heads and valve covers, please contact the Trick Flow Technical Department (1-330-630-1555 Monday through Friday from 9:00 am to 5:00 pm EST) for additional measurements.

Headers with Catalytic Converters Systems

Trick Flow by Stainless Works headers for late model vehicles also include high flow stainless steel catalytic converters and O2 sensor extensions to keep you street legal, plus include clamps, bolts, and RTV silicone for an easy installation.

Headers with Off-Road Intermediate Pipe Systems

Announce your arrival with a raspy, race car like growl with a Trick Flow by Stainless Works header and off-road intermediate pipe system. The lack of catalytic converters increases the engine's volume while the high-flow design of the low restriction lead pipes greatly improves horsepower, torque, and engine efficiency. For off-road use only.




TFS-CA679S7



TFS-BBCDFT



TFS-Z0662CAT

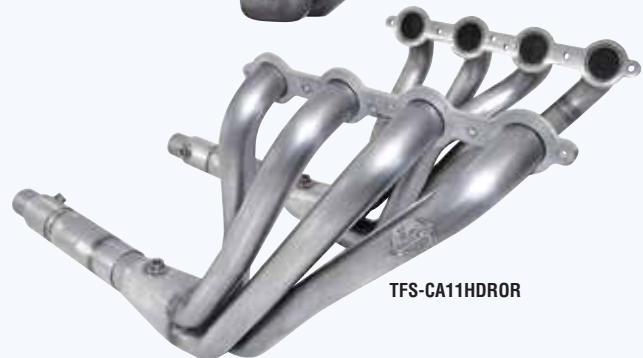

TFS-CA11HDROR

Trick Flow by Stainless Works Headers								
	Application	Type	Year	Engine	Tube Diameter	Collector Size and Style	Notes	Part Number
Cadillac	CTS-V	Headers with Converters System	2009-14	LSA	2"	Fits to factory connection point	Includes 3" lead pipes and X-pipe	TFS-CTSV09HCAT
	CTS-V	Headers with Converters System	2009-14	LSA	2"	Fits to Stainless Works Performance Connect system	Includes 3" lead pipes	TFS-CTSV09HCATSW
	CTS-V	Headers with Off-Road Pipe System	2009-14	LSA	2"	Fits to factory connection point	Includes 3" off-road lead pipes and X-pipe	TFS-CTSV09HOR
	CTS-V	Headers with Off-Road Pipe System	2009-14	LSA	2"	Fits to Stainless Works Performance Connect system	Includes 3" off-road lead pipes	TFS-CTSV09HORSW
Chevrolet	Universal	Turbo Headers	—	396-454	2 1/4"	3 1/2" slip-on	Up and forward turbo mounting position	TFS-BBCT
	Universal	Turbo Headers	—	396-454	2 1/2"	3 1/2" slip-on	Down and forward turbo mounting position	TFS-BBCDFT
	Universal	Turbo Headers	—	LS	1 3/4"	3" slip-on	Down and forward turbo mounting position, works with factory A/C	TFS-LS1DFT
	Universal	Turbo Headers	—	LS	1 7/8"	3" slip-on	Up and forward turbo mounting position, works with factory A/C	TFS-LSXT
	Universal	Turbo Headers	—	283-400	1 7/8"	3" slip-on	Up and forward turbo mounting position	TFS-SBCT

Trick Flow by Stainless Works Headers (continued)

	Application	Type	Year	Engine	Tube Diameter	Collector Size and Style	Notes	Part Number
Chevrolet (continued)	Camaro	Headers	1970-81	283-400	1 $\frac{5}{8}$ "	3" three-bolt		TFS-CA6781SB
	Camaro	Headers	1970-81	GM LS engine swap	1 $\frac{7}{8}$ "	3" slip-on with O ₂ sensor bungs	Includes 1" set-back motor mount adapters for small block motor mounts	TFS-CA7081LS1
	Camaro	Headers with Converters System	1994-95	LT1	1 $\frac{3}{4}$ "	Fits to factory connection point	Includes 2 $\frac{1}{2}$ " Y-pipe and AIR tubes	TFS-CA9495CAT
	Camaro	Headers with Converters System	1996-97	LT1	1 $\frac{3}{4}$ "	Fits to factory connection point	Includes 2 $\frac{1}{2}$ " Y-pipe and AIR tubes	TFS-CA9697CAT
	Camaro	Headers with Converters System	1998-99	LS1	1 $\frac{3}{4}$ "	Fits to factory connection point	Includes 2 $\frac{1}{2}$ " Y-pipe and AIR tubes	TFS-CA9899CAT
	Camaro	Headers with Converters System	2000	LS1	1 $\frac{3}{4}$ "	Fits to factory connection point	Includes 2 $\frac{1}{2}$ " Y-pipe	TFS-CA00CAT
	Camaro	Headers with Converters System	2001-02	LS1	1 $\frac{3}{4}$ "	Fits to factory connection point	Includes 2 $\frac{1}{2}$ " Y-pipe	TFS-CA0102CAT
	Camaro	Headers with Converters System	2010-13	LS3/L99/LSA	1 $\frac{7}{8}$ "	Fits to factory connection point		TFS-CA11HDRCATST
	Camaro	Headers with Converters System	2010-13	LS3/L99/LSA	2"	Fits to factory connection point		TFS-CA11HDRCAT
	Camaro	Headers with Converters System	2010-14	LS3/L99/LSA	1 $\frac{7}{8}$ "	3" slip-on, fits to Stainless Works Performance Connect system	Includes 3" lead pipes	TFS-CA11HDR3CATS
	Camaro	Headers with Converters System	2010-14	LS3/L99/LSA	2"	3" slip-on, fits to Stainless Works Performance Connect system	Includes 3" lead pipes	TFS-CA11HDR3CAT
	Camaro	Headers with Off-Road Pipe System	2010-14	LS3/L99/LSA	1 $\frac{7}{8}$ "	3" slip-on, fits to Stainless Works Performance Connect system	Includes 3" off-road lead pipes	TFS-CA11HDR3ORST
	Camaro	Headers with Off-Road Pipe System	2010-14	LS3/L99/LSA	2"	3" slip-on, fits to Stainless Works Performance Connect system	Includes 3" off-road lead pipes	TFS-CA11HDROR
	Camaro	Headers with Off-Road Pipe System	2010-14	LS3/L99/LSA	1 $\frac{7}{8}$ "	3" slip-on; fits to factory connection point	Includes 3" off-road lead pipes	TFS-CA11HDR3ORST
	Camaro	Headers with Off-Road Pipe System	2010-14	LS3/L99/LSA	2"	3" slip-on; fits to factory connection point	Includes 3" off-road lead pipes	TFS-CA11HDRORST
	Camaro/Nova	Headers	1967-69	283-400	1 $\frac{3}{4}$ "	3" three-bolt	Will not work with factory A/C	TFS-CA679S7
	Camaro/Nova	Headers	1967-69	LS engine swap	1 $\frac{3}{4}$ "	3" slip-on with O ₂ sensor bungs	With rack and pinion steering, will not work with factory A/C box	TFS-CALS1
	Camaro/Nova	Headers	1967-69	LS engine swap	1 $\frac{3}{4}$ "	3" slip-on with O ₂ sensor bungs	With OEM steering box, will not work with factory A/C box	TFS-CALS1SB
	Camaro/Nova	Headers	1967-69	396-454	2"	3 $\frac{1}{2}$ " three-bolt	With power steering	TFS-CANV679
	Nova	Headers	1962-67	LS engine swap	1 $\frac{7}{8}$ "	3" slip-on	With aftermarket rack and pinion steering Includes motor mount adapters for use with stock motor mounts in neutral position	TFS-NVLS1
	Chevelle/Malibu/El Camino/Monte Carlo	Headers	1968-72	283-400	1 $\frac{5}{8}$ "	3 $\frac{1}{2}$ " three-bolt		TFS-CV6872SB
	Chevelle/Malibu/El Camino/Monte Carlo	Headers	1968-72	396-454	2"	3 $\frac{1}{2}$ " slip-on	Recommend mini starter for clearance	TFS-CVBB2
	Chevelle/Malibu/El Camino/Monte Carlo	Headers	1968-72	LS engine swap	1 $\frac{7}{8}$ "	3" slip-on with O ₂ sensor bungs		TFS-CVLS1
	Chevelle/Malibu/El Camino/Monte Carlo	Headers	1968-72	LS engine swap	1 $\frac{3}{4}$ "	3" slip-on with O ₂ sensor bungs		TFS-CVLS1ST
	Dragster	Headers	—	396-454	2 $\frac{1}{4}$ "	4" merge-style slip-on	Downswept style, with conventional heads	TFS-DNBBC225
	Dragster	Headers	—	396-454	2 $\frac{3}{8}$ "	4 $\frac{1}{2}$ " merge-style slip-on	Downswept style, with conventional heads	TFS-DNBBC238
	Dragster	Headers	—	396-454	2 $\frac{1}{2}$ "	5" merge-style slip-on	Downswept style, with conventional heads	TFS-DNBBC250
	Dragster	Headers	—	396-454	2 $\frac{1}{4}$ " x 2 $\frac{3}{8}$ " stepped	4 $\frac{1}{2}$ " merge-style slip-on	Downswept style, with conventional heads	TFS-DBBC225238
	Dragster	Headers	—	396-454	2 $\frac{3}{8}$ " x 2 $\frac{1}{2}$ " stepped	5" merge-style slip-on	Downswept style, with conventional heads	TFS-DBBC238250
	Dragster	Headers	—	396-454	2 $\frac{1}{4}$ "	4" merge-style slip-on	Upswept style, with conventional heads	TFS-UPBBC225

Trick Flow by Stainless Works Headers (continued)								
	Application	Type	Year	Engine	Tube Diameter	Collector Size and Style	Notes	Part Number
Chevrolet (continued)	Dragster	Headers	—	396-454	2¼"	4" merge-style slip-on	Upswept style, with conventional heads	TFS-UPBBC250
	Dragster	Headers	—	396-454	2½" x 2¼" stepped	5" with merge spikes	Upswept style, with conventional heads	TFS-UBBC213225
	Dragster	Headers	—	396-454	2¼" x 2¾" stepped	4½" merge-style slip-on	Upswept style, with conventional heads	TFS-UBBC225238
	Dragster	Headers	—	396-454	2¼" x 2½" stepped	5" with merge spikes	Upswept style, with conventional heads	TFS-UBBC225250
	Dragster	Headers	—	396-454	2¾" x 2½" stepped	5" merge-style slip-on	Upswept style, with conventional heads	TFS-UBBC238250
	Corvette	Headers with Converters System	1992-96	LT1/LT4	1½"	2½"; fits to factory connection point	Includes AIR tubes and O ₂ sensor bungs installed	TFS-C-492-96CAT
	Corvette	Headers with Converters System	1997-2000	LS1	1¾"	Fits to factory connection point	Includes 3" X-pipe and center section AIR tubes and O ₂ sensors installed	TFS-C5LS1CAT
	Corvette	Headers with Converters System	1997-2000	LS1	1⅞"	Fits to factory connection point	Includes 3" X-pipe and center section AIR tubes and O ₂ sensors installed	TFS-C5LS178CAT
	Corvette	Headers with Converters System	2001-04	LS1/LS6	1¾"	Fits to factory connection point	Includes 3" X-pipe and center section AIR tubes and O ₂ sensors installed	TFS-C5LS103CAT
	Corvette	Headers with Converters System	2001-04	LS1/LS6	1⅞"	Fits to factory connection point	Includes 3" X-pipe and center section AIR tubes and O ₂ sensors installed	TFS-C5LS103CATBT
	Corvette	Headers with Converters System	2005-13	LS2/LS3	1⅞"	Fits to factory connection point	Includes 2½" X-pipe and center section	TFS-C6CAT
	Corvette	Headers with Converters System	2006-13	LS7	1⅞"	Fits to factory connection point	Includes 3" X-pipe and center section Includes oil cooler lines	TFS-Z06178CAT
	Corvette	Headers with Converters System	2006-13	LS7	2"	Fits to factory connection point	Includes 3" X-pipe and center section Includes oil cooler lines	TFS-Z062CAT
	Corvette	Headers with Off-Road Pipe System	2006-13	LS7	1⅞"	3" slip-on; fits to factory connection point	Includes 3" off-road lead pipes and X-pipe, O ₂ extensions, Accuseal clamps, clamp/hanger assemblies, oil cooler lines, compression fittings, zip ties, cable clamps, center section, and oil cooler lines	TFS-Z06178OR
	Dodge	Challenger	2008-14	Hemi	1⅞"	3" slip-on; fits to factory connection point or to Stainless Works Performance Connect system	Includes 3" off-road lead pipes, clamps, O ₂ sensor extensions, and RTV silicone	TFS-HM64HDROR
	Ford	Universal	—	260-351 Windsor	1⅞"	3" slip-on	Down and forward turbo mounting position	TFS-SBFDFT
		Universal	—	429/460	2½"	3½" slip-on	Down and forward turbo mounting position	TFS-BBFDFT
		Mustang	—	260-351 Windsor	1⅞"	3" slip-on	Down and forward turbo mounting position Includes 3" crossover tube with 3/8" T6 turbo flange, 3" V-band flanges and clamps, 1/4" aluminum motor plate, and coned 5"-to-4" 90° bend downpipe	TFS-SBFDFTKIT
		Mustang	1996-2002	4.6L 2V	1½"	2½" slip-on; fits to factory connection point	Includes 2½" X-pipe	TFS-M6904
		Mustang	2005-10	4.6L 2V	1¾"	3" slip-on; fits to factory connection point	Includes 3" lead pipes	TFS-M05H175
		Mustang	2011-13	5.0L 4V	1⅞"	3" slip-on with merge spikes; fits to factory connection point	Includes 3" X-pipe and lead pipes	TFS-M11HDRCATX
		Mustang	2011-14	5.0L 4V	1⅞"	3" slip-on with merge spikes; fits to factory connection point	Includes 3" off-road lead pipes and X-pipe	TFS-M11HDRORX
		GT500	2007-10	5.4L 4V S/C	1⅞"	3" slip-on with merge spikes; fits to factory connection point or to Stainless Works Performance Connect system	Includes 3" X-pipe and lead pipes	TFS-GT5HCAT
		GT500	2007-10	5.4L 4V S/C	1⅞"	3" slip-on with merge spikes; fits to factory connection point or to Stainless Works Performance Connect system	Includes 3" off-road lead pipes and X-pipe	TFS-GT5HOR
		GT500	2011-14	5.4L 4V S/C	1⅞"	3" slip-on with merge spikes; fits to factory connection point or to Stainless Works Performance Connect system	Includes 3" X-pipe and lead pipes	TFS-GT115HCAT
		GT500	2011-14	5.4L 4V S/C	1⅞"	3" slip-on with merge spikes fits to factory connection point or to Stainless Works Performance Connect system	Includes 3" off-road lead pipes and X-pipe	TFS-GT115HOR

Trick Flow by Stainless Works Headers • Trick Flow by Cometic MLS Exhaust Gaskets • Header Spark Plug Socket • Ball Caps

Trick Flow by Stainless Works Headers (continued)

	Application	Type	Year	Engine	Tube Diameter	Collector Size and Style	Notes	Part Number
Ford (continued)	F-150	Headers with Converters System	2011-14	3.5L Ecoboost	—	Fits to factory connection point	Includes 3" downpipe and Y-pipe, does not come with headers	TFS-FTECODPCAT
	F-150	Headers with Off-Road Pipe System	2011-14	3.5L Ecoboost	—	Fits to factory connection point	Includes 3" off-road downpipe and Y-pipe, does not come with headers	TFS-FTECODP
	Raptor SuperCab	Headers with Converters System	2010-14	5.4L/6.2L	1 7/8"	3" slip-on with merge spikes; fits to Stainless Works Performance Connect system	Includes 3" lead pipes, X-pipe, and clamps	TFS-FTRPT10HCAT
	Raptor SuperCab	Headers with Converters System	2010-14	5.4L/6.2L	1 7/8"	3" slip-on with merge spikes; fits to factory connection point	Includes 3" lead pipes, Y-pipe, and clamps	TFS-FTRPT10HCATY
	Raptor SuperCab	Headers with Off-Road Pipe System	2010-14	5.4L/6.2L	1 7/8"	3" slip-on with merge spikes; fits to Stainless Works Performance Connect system	Includes 3" off-road lead pipes, X-pipe, and clamps	TFS-FTRPT10HOR
	Raptor SuperCab	Headers with Off-Road Pipe System	2010-14	5.4L/6.2L	1 7/8"	3" slip-on with merge spikes; fits to factory connection point	Includes 3" off-road lead pipes, Y-pipe, and clamps	TFS-FTRPT10HORY
	Raptor SuperCrew	Headers with Converters System	2011-14	6.2L	1 7/8"	3" slip-on with merge spikes; fits to Stainless Works Performance Connect system	Includes 3" lead pipes, X-pipe, and clamps	TFS-FTRPT11HCATS
	Raptor SuperCrew	Headers with Converters System	2011-14	6.2L	1 7/8"	3" slip-on with merge spikes; fits to factory connection point	Includes 3" lead pipes, Y-pipe, and clamps	TFS-FTRPT11HCATY
	Raptor SuperCrew	Headers with Off-Road Pipe System	2011-14	6.2L	1 7/8"	3" slip-on with merge spikes; fits to Stainless Works Performance Connect system	Includes 3" off-road lead pipes, X-pipe, and clamps	TFS-FTRPT11HORSC
	Raptor SuperCrew	Headers with Off-Road Pipe System	2011-14	6.2L	1 7/8"	3" slip-on with merge spikes; fits to factory connection point	Includes 3" off-road lead pipes, Y-pipe, and clamps	TFS-FTRPT11HORYS
Pontiac	GTO	Headers with Converters System	2004	LS1	1 3/4"	Fits to factory connection point	Includes 3" pipes	TFS-GTOHCAT
	GTO	Headers with Converters System	2005-06	LS2	1 3/4"	Fits to factory connection point	Includes 3" pipes	TFS-05GTOHCAT

Trick Flow by Cometic MLS Exhaust Gaskets

These superior quality exhaust gaskets from Trick Flow and Cometic offer better torque retention and less distortion compared to conventional exhaust gaskets.

The gaskets are constructed from multiple layers of stainless steel for outstanding corrosion resistance and will not burn through or push out, even under extreme cylinder pressures. No sealants are required for installation; all gaskets are .030" thick.

TFS-30490931	MLS exhaust gaskets, small block Chevrolet, 1.500" x 1.500" D-port shape, pair
TFS-30490941	MLS exhaust gaskets, GM LT1/LT4, 1.500" x 1.500" D-port shape, pair
TFS-30690931	MLS exhaust gaskets, GM LS, 1.820" round port shape, pair
TFS-41490931	MLS exhaust gaskets, big block Chevrolet, 2.125" round port shape, pair
TFS-51490931	MLS exhaust gaskets, small block Ford, 1.250" x 1.500" rectangular port shape, pair
TFS-51890931	MLS exhaust gaskets, Ford 4.6L/5.4L 2V, 1.700" round port shape, pair
TFS-52990931	MLS exhaust gaskets, Ford 4.6L/5.4L 3V, 1.600" x 1.570" D-port shape, pair
TFS-52990951	MLS exhaust gaskets, Ford 5.0L 4V, 1.875" round port shape, pair
TFS-53490931	MLS exhaust gaskets, Ford 429/460, 1.550" x 2.350" oval port shape, pair



TFS-30490931



TFS-51890931



TFS-52990951



TFS-53490931

Header Spark Plug Socket

To help save your knuckles while installing headers in crowded engine compartments (like late-model GM F-bodies), Trick Flow designed this modified socket. The square drive has been removed so the spark plug protrudes through the end for more clearance at the header tubes; just use your 3/4" open or box end wrench to turn the hex base. The socket is made from vanadium steel and has a black oxide finish for protection against corrosion and wear. Fits all 5/8" spark plugs.



TFS-90500 Header spark plug socket, each

Ball Caps

These Trick Flow® embroidered hats are made of a cotton twill material and have an adjustable back closure.

TFS-HAT-BK	Ball cap, Trick Flow Racing, black, each
TFS-HAT-KH	Ball cap, Trick Flow Racing, khaki, each
TFS-P201	Ball cap, Ultimate Bolt-On Performance!, black, each



TFS-P201



TFS-30694030-045

**Trick Flow by Cometic
MLS Head Gaskets**



These multi-layer steel head gaskets from Trick Flow and Cometic are the best way to seal aftermarket cylinder heads to an engine. With three layers of stainless steel, these gaskets offer better torque retention, less distortion, and better sealing than conventional or composite head gaskets in high horsepower, high cylinder-pressure applications.

- TFS-30494040-040 MLS head gasket, GM LT1/LT4, 4.040" bore, .040" thick, each
- TFS-30494060-040 MLS head gasket, small block Chevrolet, 4.060" bore, .040" thick, each
- TFS-30494200-040 MLS head gasket, small block Chevrolet, 4.200" bore, .040" thick, each
- TFS-30694030-045 MLS head gasket, GM LS1/LS6, 3.910" bore, .045" thick, each
- TFS-30694030-051 MLS head gasket, GM LS1/LS6, 3.910" bore, .051" thick, each
- TFS-30694060-045 MLS head gasket, GM LS2, 4.060" bore, .045" thick, each
- TFS-30694060-051 MLS head gasket, GM LS2, 4.060" bore, .051" thick, each
- TFS-30694125L051 MLS head gasket, GM LSX, 4.125" bore, .051" thick, 6-bolt, left, each
- TFS-30694125R051 MLS head gasket, GM LSX, 4.125" bore, .051" thick, 6-bolt, right, each
- TFS-30694130-051* MLS head gasket, GM LS2/6.0L, 4.130" bore, .051" thick, each
- TFS-30694160-045 MLS head gasket, GM LS7/LSX, 4.150" bore, .045" thick, each
- TFS-30694160-051 MLS head gasket, GM LS7/LSX, 4.150" bore, .051" thick, each
- TFS-30694185L051 MLS head gasket, GM LSX, 4.185" bore, .051" thick, 6-bolt, left, each
- TFS-30694185R051 MLS head gasket, GM LSX, 4.185" bore, .051" thick, 6-bolt, right, each
- TFS-32694100-045 MLS head gasket, GM LS3/L92, 4.100" bore, .045" thick, each
- TFS-32694100-051 MLS head gasket, GM LS3/L92, 4.100" bore, .051" thick, each
- TFS-41394375-040 MLS head gasket, big block Chevrolet, 4.375" bore, .040" thick, each
- TFS-41394540-040 MLS head gasket, big block Chevrolet, 4.540" bore, .040" thick, each
- TFS-51494030-040 MLS head gasket, small block Ford, 4.030" bore, .040" thick, each
- TFS-51494060-040 MLS head gasket, small block Ford, 4.060" bore, .040" thick, each
- TFS-51494080-040 MLS head gasket, small block Ford, 4.080" bore, .040" thick, each
- TFS-51494155-040 MLS head gasket, small block Ford, 4.155" bore, .040" thick, each
- TFS-5180902L MLS head gasket, Ford 4.6L/5.4L 2V, Twisted Wedge® Race 195 cylinder heads and Ford Racing M-6010B0SS50 engine block only, 3.700 bore, .030" thick, left, each
- TFS-5180902R MLS head gasket, Ford 4.6L/5.4L 2V, Twisted Wedge Race 195 cylinder heads and Ford Racing M-6010B0SS50 engine block only, 3.700 bore, .030" thick, right, each
- TFS-5180903L MLS head gasket, Ford 5.0L 4V, 3.700" bore, .040" thick, left, each
- TFS-5180903R MLS head gasket, Ford 5.0L 4V, 3.700" bore, .040" thick, right, each
- TFS-53494500-040 MLS head gasket, Ford 429/460 and Trick Flow A460, 4.500" bore, .040" thick, each
- TFS-53494670-040 MLS head gasket, Ford 429/460 and Trick Flow A460, 4.670" bore, .040" thick, each
- TFS-54594600-045 MLS head gasket, Ford 429/460 and Trick Flow A460, 4.600" bore, .045" thick, 18-bolt, each

*Required when using Trick Flow GenX® 235 or 245 cylinder heads on 4.000" and larger bore engine blocks.



TFS-8510600



TFS-85101-1



TFS-8510300

Differential Covers

Trick Flow differential covers feature heavy-duty A319 cast aluminum construction and extreme-duty bearing cap support studs to prevent cap movement and breakage, as well as ensure proper pinion depth and backlash. The covers come with support studs, jam nuts, ARP stainless steel bolts, gasket, and a 3/8" magnetic drain plug.

The carrier bearing cap stud kits replace the weak factory differential carrier bearing cap bolts with much stronger studs to further increase differential strength. Includes all necessary studs, nuts, and washers for a complete installation.

Differential Covers

- TFS-8510200 Differential cover kit, GM 12-bolt passenger car, each
- TFS-8510300 Differential cover kit, GM 8.2"/8.5", each
- TFS-8510400 Differential cover kit, GM 7.5"/7.625", each
- TFS-8510500 Differential cover kit, Ford 8.8", each
- TFS-8510600 Differential cover kit, Ford 10.25"/10.5" Sterling, each

Carrier Bearing Cap Stud Kits

- TFS-85101-1 Carrier bearing cap stud kit, Ford 8.8", each
- TFS-85102-1 Carrier bearing cap stud kit, GM 12-bolt passenger car, each



TFS-1012



TFS-1001



Transmission Pans

Trick Flow transmission pans are made from A319 cast aluminum. They hold between one to three extra quarts of fluid (depending on application) and are finned to help the transmission dissipate heat faster for maximum efficiency. The pans come complete with mounting bolts, drain plug, filter extension, and a new gasket (where applicable). Part number TFS-1012 also includes a dipstick and tube.

- TFS-1000 Transmission pan kit, GM TH250/350, each
- TFS-1001 Transmission pan kit, GM TH400, each
- TFS-1003 Transmission pan kit, Ford C-6, each
- TFS-1006 Transmission pan kit, Ford C-4 1970 and later, case-fill, each
- TFS-1007 Transmission pan kit, Ford AOD, each
- TFS-1009 Transmission pan kit, Chrysler A-727 Torqueflite, each
- TFS-1011 Transmission pan kit, Ford E40D/4R100/5R110, each
- TFS-1012 Transmission pan kit, Ford 5R55E/5R55N/5R55S/5R55W, includes dipstick, each
- TFS-1018 Transmission pan kit, GM TH700R4/4L60/E, each
- TFS-1006-PFK Pan fill dipstick tube fitting, Ford C-4, each

Valve Cover Breather Systems and Accessories

Protect your investment with Trick Flow valve cover breather systems and accessories. Made from premium components, these pieces deliver great performance and add the perfect finishing touch to your engine compartment.

The oil vapor separator tank systems pre-clean crankcase ventilation gases before introducing them into the intake manifold. The modular design fits a variety of applications, including traditional open breather systems, late model closed systems, and systems for forced induction engines. Manufactured from billet aluminum with a black anodized finish, the systems feature a ball-style drain valve, fluid level sight plug, stainless steel mounting bracket, -8 AN male inlet, and a customizable outlet for 3/4" push-in breathers, PCV valves, and push-in filter elements.

The oil vapor line limiting breather fittings attach to the valve cover breather opening and reduce the amount of oil vapor vented from the crankcase. The fittings are manufactured from billet aluminum and feature a cleanable, reusable sintered metal strainer element.

Oil Fill Plugs

- TFS-51800800 Oil fill plug, 1.150" hole, each
- TFS-51400803 Oil fill plug, with Trick Flow logo, 1.150" hole, each



TFS-51400808

Filler Tubes

- TFS-51400805 Filler tube, short, weld-on, each
- TFS-51400806 Filler tube, tall, weld-on, each
- TFS-51400807 Filler tube cap, each



TFS-51400805

Weld-In Bungs

- TFS-51400808 Bung, 1/8" NPT female, each
- TFS-51400809 Bung, 1/4" NPT female, each
- TFS-51400810 Bung, 3/8" NPT female, each
- TFS-51400811 Bung, 1/2" NPT female, each
- TFS-51400812 Bung, 3/4" NPT female, each
- TFS-51400813 Bung, -6 AN male, each
- TFS-51400814 Bung, -8 AN male, each
- TFS-51400815 Bung, -10 AN male, each
- TFS-51400816 Bung, -12 AN male, each
- TFS-51400817 Bung, -16 AN male, each



TFS-51400807



TFS-51400813

Oil Vapor Separator Tank Systems and Components

Oil Vapor Tank Systems

- TFS-K51400850 Single separator tank system and plumbing kit, fits 1/4" hole valve covers, each
- TFS-K51400852 Dual separator tank system and plumbing kit, fits 1/4" hole valve covers, each

Oil Vapor Tank Individual Components

- TFS-51400850 Separator tank only, -8 AN single inlet, each
- TFS-51400851 Separator tank only, -6 AN single inlet, each
- TFS-51400852 Separator tank only, -8 AN dual inlet, each
- TFS-51400853 Separator system plumbing kit only, 3' of hose and limiting fittings, single tank, each
- TFS-51400854 Separator system plumbing kit only, 6' of hose and limiting fittings, dual tank, each
- TFS-51400870 Clamp-on filter, 2" O.D., with tank adapter, each



TFS-44000

Oil Vapor Line Limiting Breather Fittings

With Internal Strainer Element

- TFS-51400855 Valve cover separator/breather fitting, 1.220" hole, 3/4" or 1" breather or PCV valve, push-in, each
- TFS-51400856 Valve cover separator/breather fitting, 1/2" NPT hole x -8 AN threaded male, each
- TFS-51400857 Valve cover separator/breather fitting, 1/2" NPT hole x 5/8" threaded male barb, each
- TFS-51400858 Valve cover separator/breather fitting, 3/4" male barb x 1/2" male barb, push-in, each
- TFS-51400859 Valve cover separator/breather fitting, 3/4" male barb x 5/8" male barb, push-in, each
- TFS-51400860 Valve cover separator/breather fitting, 3/4" male barb x 3/4" male barb, push-in, each
- TFS-51400861 Valve cover separator/breather fitting, 3/4" male barb x -8 AN threaded male, push-in, each

Without Strainer Element

- TFS-51400956 Valve cover separator/breather fitting, 1/2" NPT hole x -8 AN threaded male, each
- TFS-51400957 Valve cover separator/breather fitting, 1/2" NPT hole x 5/8" male barb, threaded, each
- TFS-51400961 Valve cover separator/breather fitting, 3/4" male barb x -8 AN threaded male, push-in, each



TFS-K51400852

Coolant Overflow/Recovery Tank

The Trick Flow stainless steel overflow/recovery tank will prevent excess coolant from spilling out onto the street or track. The brightly polished tank features a custom drain petcock and includes all necessary brackets and fittings for an easy installation.

- TFS-30004 Overflow/recovery tank, 3.000" x 10.750", each



TFS-30004

Chrome Engine Accessories

Trick Flow 14" diameter air cleaners feature a high-flow, 3" tall cotton gauze element and triple chrome plated steel construction. The Trick Flow logo is embossed into the lid and three different base options will fit just about any carburetor and ignition combination. Includes mounting stud and wing nut.

The chrome plated valve covers provide a great alternative to higher priced aluminum covers. They're baffled to prevent oil breather blow-by (except small block Ford) and feature embossed Trick Flow logos, triple chrome plating, and new gaskets.

The valve cover breathers feature a pre-treated cotton gauze filter element that protects your engine while letting it breathe freely. Other features include a push-in design for quick installation and chrome tops with embossed Trick Flow logos.

Chrome Air Cleaners

- TFS-23020 Air cleaner, flat base, each
- TFS-23021 Air cleaner, 13/16" drop base, each



TFS-44020

Chrome Valve Covers

- TFS-44000 Valve covers, Chevrolet 283-400, pair
- TFS-44001 Valve covers, Chevrolet 396-454, pair
- TFS-44002 Valve covers, Ford 260-351W, pair
- TFS-44003 Valve covers, Ford 429/460, pair



TFS-44022

Chrome Valve Cover Breathers

- TFS-44020 Valve cover breather, fits 1.250" hole, rubber base, shielded, each
- TFS-44021 Valve cover breather, fits 1.250" hole, rubber base, each
- TFS-44022 Valve cover breather, fits 1.250" hole, steel base, each
- TFS-44023 Valve cover breather, fits 1.000" i.d. grommets, steel base, each



TFS-30600600

Steam Line Plumbing Kits and Accessories for GM LS

Trick Flow steam line plumbing kits and accessories allow owners of modified LS-powered cars and trucks to upgrade the factory steam tubes to the more desirable and easier-to-service race car plumbing system.

The plumbing kits are available two ways—just for the front of the heads or for all four corners. They include all of the necessary hose, fittings, and other components needed for installation. Plus, the components are available separately for those who want to design a custom system.

Steam Line Plumbing Kits, Black Rubber Hose

- TFS-30600600 Steam line plumbing kit, front of heads only, each
- TFS-30600601 Steam line plumbing kit, front and rear of heads, each

Steam Line Plumbing Kits, Black Nylon Braided AN Hose

- TFS-306SB600 Steam line plumbing kit, front of heads only, each
- TFS-306SB601 Steam line plumbing kit, front and rear of heads, each

Steam Line Plumbing Kits, Stainless Steel Braided AN Hose

- TFS-306S0600 Steam line plumbing kit, front of heads only, each
- TFS-306S0601 Steam line plumbing kit, front and rear of heads, each

Steam Line Individual Components

- TFS-30600611 Steam line fitting, -4 AN male, each
- TFS-30600612 Steam line cap, each
- TFS-30600613 Steam line fitting, 1/8" female NPT, 90°, each
- TFS-30600615 Cylinder head coolant sensor plug and seal, 12mm, each



Trick Flow T-Shirts

From 100% cotton T-shirts to sweatshirts and everything in between, Trick Flow has something for every fashionable motorsports enthusiast!

- TFS-P61M T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, white, medium, each
- TFS-P61L T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, white, large, each
- TFS-P61XL T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, white, X-large each
- TFS-P61XXL T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, white, 2X-large each
- TFS-P61XXXL T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, white, 3X-large each
- TFS-P62M T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, black, medium, each
- TFS-P62L T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, black, large, each
- TFS-P62XL T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, black, X-large each
- TFS-P62XXL T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, black, 2X-large each
- TFS-P62XXXL T-shirt, "Trick Flow Specialties" on front/"Ultimate Bolt-On Performance" on back, black, 3X-large each



TFS-K90015



Cylinder Head Porting Tools

Trick Flow's cylinder head porting tools and accessories are essential for cleaning up ports, combustion chambers, and port-matching intake manifolds at home.

The Deluxe Cartridge Roll Kit (TFS-90001) for cast iron and aluminum cylinder heads includes (4) 60-grit cartridge rolls, (40) 80-grit rolls, and (40) 120-grit rolls in assorted sizes, plus two 1/4" shank mandrels and a durable plastic storage box.

The Carbide Deburring Set (TFS-90002) for aluminum heads and intakes includes one 3/8" oval, one 3/8" cylindrical, and one 3/8" tree-style bit. The bits are six inches long to reach deep inside the ports.

The Complete Port Match Tool Kit (TFS-K90015) includes the Deluxe Cartridge Roll Kit plus precision measuring instruments, two 3/8" oval carbide burrs, layout dye, and grinding wax. This kit works with both cast iron and aluminum heads.

Many of the tools custom head and manifold porters use in their own shops to turn out race-winning parts are also available individually.

- TFS-K90015 Complete port match tool kit, each
- TFS-90001 Deluxe cartridge roll kit, each
- TFS-90002 Carbide deburring set, single-cut for aluminum, set of 3
- TFS-90003 L-square, 3" x 4", 90°, stainless steel, each
- TFS-90004 Precision scribe, each
- TFS-90005 Carbide burr, 2 3/8" long x 3/8" oval, 1/4" shank, single-cut for aluminum, each
- TFS-90006 Centering scale, 24" long, each
- TFS-90007 Layout dye, blue, 8 ounces, each
- TFS-90008 Grinding wax, .43 ounces, each
- TFS-90025 Carbide burr, 2 3/8" long x 3/8" oval, 1/4" shank, double-cut for aluminum and cast iron, each

Cylinder Head Work Stands

These Trick Flow cylinder head work stands are ideal for home porting, polishing, or CCing jobs. They'll work with most popular cylinder heads and disassemble for easy storage.

- TFS-9100 Work stands, pair



Engine Oil Supplement

Protect your high performance engine from the inside! Just a few short years ago engine oils had higher levels of zinc-dialkyl-dithiophosphate (ZDDP), an anti-wear additive crucial to preventing valvetrain wear in flat tappet camshaft engines. Modern oils have much lower levels of ZDDP, leaving all high-rpm racing, performance street, and marine applications as well as classic, vintage, and musclecar engines with flat tappet camshafts vulnerable to premature camshaft failure.

That's why Trick Flow engineered this oil supplement with increased levels of ZDDP and anti-wear additives. It even provides the extra protection engines need during the critical break-in period.

One bottle treats 5-9 quarts of conventional or synthetic oil and should be used at every oil change.

- TFS-94000 Oil supplement, 12 oz. bottle, each
- TFS-94000-12 Oil supplement, 12 oz. bottles, case of 12



TFS-94000

Engineering and Manufacturing Race-Winning Parts Is What We Do!



YouTube



Trick of Flow[®]

Specialties

285 West Avenue • Tallmadge, OH 44278

Phone: 1-330-630-1555 • Fax: 1-330-633-2504 • TrickFlow.com

