

# Superformance

## FLOORSHIFT STEERING COLUMN


### INVOICING ADDRESS

NAME: .....  
 COMPANY: .....  
 ADDRESS: .....  
 TOWN/SUBURB: .....  
 STATE: ..... POSTCODE: .....  
 PHONE: ..... FAX: .....  
 EMAIL: .....

### DELIVERY ADDRESS

ATTENTION: .....  
 COMPANY: .....  
 ADDRESS: .....  
 TOWN/SUBURB: .....  
 STATE: ..... POSTCODE: .....  
 PHONE: ..... FAX: .....

Vehicle Make:.....Vehicle Model:.....Vehicle Year:.....

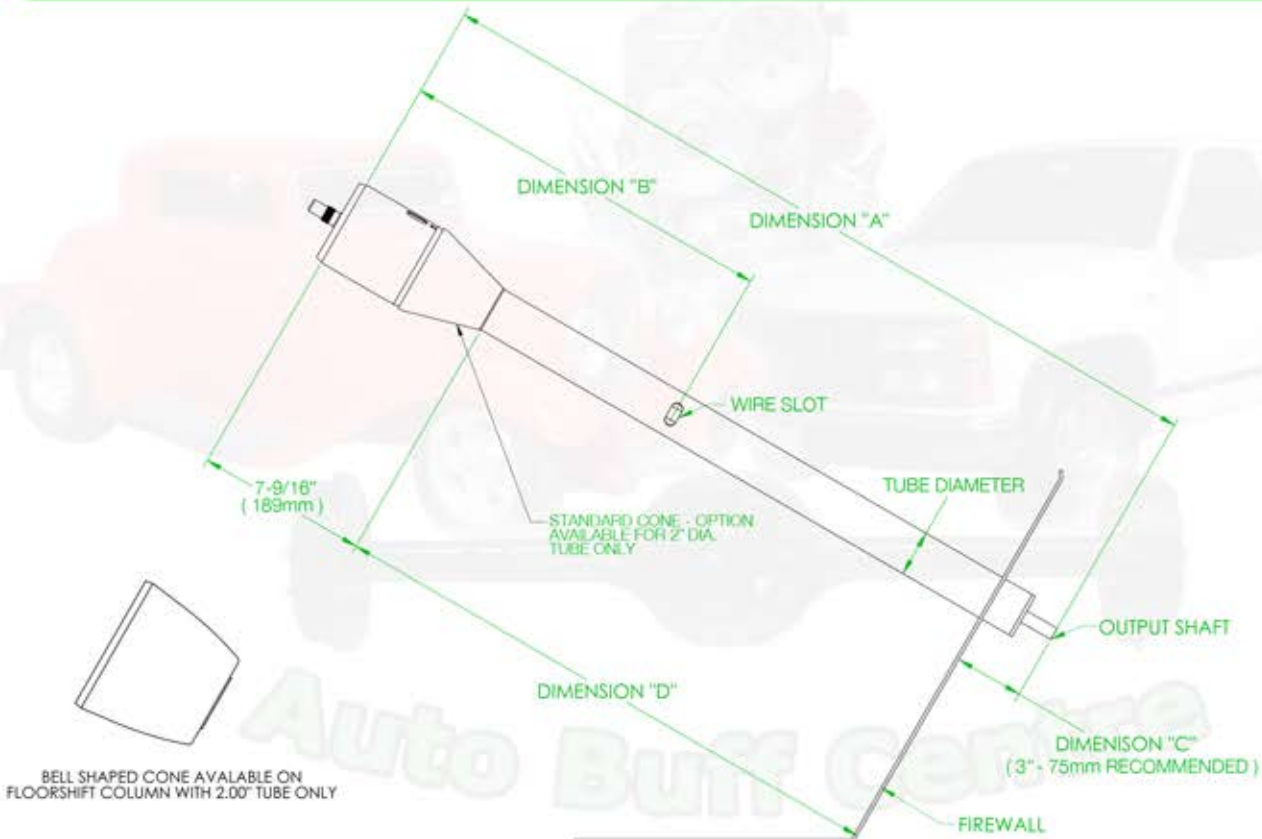

Dimension 'A':.....  
 Overall Length Dimension - C + D + 7-9/16 (189mm)  
 Dimension 'B':.....  
 Wire Slot Location - Standard is 16 Inches (406.4mm)  
 Dimension 'C':.....  
 Length of Column through firewall - 3" Recommended  
 Dimension 'D':.....  
 Distance from firewall to bottom of cone

Tube Diameter:  1.75 inch  2.00 inch  
 Please Tick   
 Cone Style:  Standard  Bell Shaped  
 Optional for 2.00 inch Diameter Tube Only - Please Tick   
 Output Shaft:  1"DD  1"-48 Spline  1"-36 Spline  
 Please Tick   
 Column Finish:  Mill  Black  Polished  
 Please Tick  (Paintable) (Powder Coat) (Stainless Steel)

[www.superformance.com.au](http://www.superformance.com.au)  
 Email: [info@superformance.com.au](mailto:info@superformance.com.au)  
 Phone: +61 (07) 3488 7888  
 Trading Hours: Monday to Friday 8am - 5pm, Saturday 8am - 12 noon

In business since 1978  
 f superformanceptyltd  
 © superformance\_pty\_ltd

539 Redland Bay Road  
 Capalaba, Queensland  
 4157, Australia